

400SD

R Series: Sliding Door Plunger Lock

SPECIFICATIONS

- Keying:** Can be keyed together with other R Series locks
- Rekeyable:** Easily rekeyable via speed-release cylinder release mechanism
- US Patent Nos:** 4,920,774; 5,121,619
- Standard function:** Key removable in locked or unlocked position.
- Body:** Zinc die cast
- Cylinder:** Solid brass, pin tumbler
- Cylinder length:** 1"
- Barrel diameter:** 1"
- Finish:** 26D, US3 or 10B
- Packaged:** Packed 10 per box

KEYING INFORMATION



- Keyway:** R Series (equivalent to CCL R1 system)
- Keys:** Includes 2 keys per lock
- Stock keying:** KD/KA - 5 pin standard
- Stock KA#:** 4T21579, 4T37526
- Masterkeyed:** 5 pin standard
- Grand masterkeyed:** Available
- Keyblank 5-pin:** KBR-5-NP (equivalent to C0106, 1003A)

INCLUDED ACCESSORIES

- 34-9 matching thimble strike
- 10-24 machine thread bolt extender for varying gaps between bypassing doors
- 10-24 machine thread strike locator



AVAILABLE FINISHES

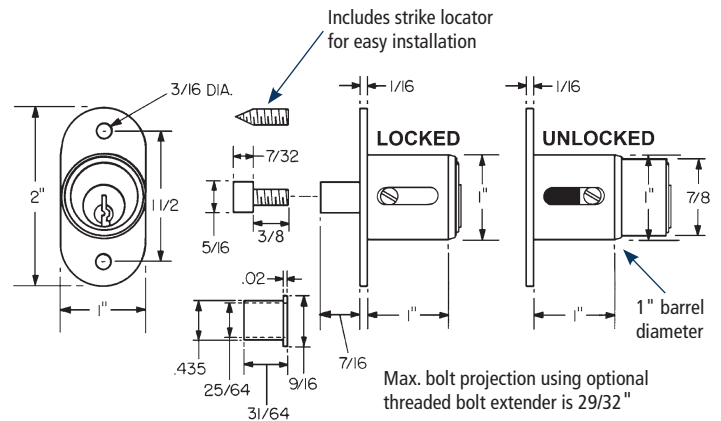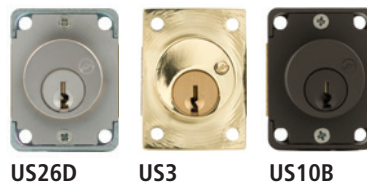

WARNING: This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

