

# CL-HIT-25

## Cabinet Lock Drill Guide

### SPECIFICATIONS

**Rubber lined jaws:** Protect cabinet doors and give greater holding power.

**Adjustable stop:** For repeat installations on the same cabinet door.

**Maximum thickness:** Works on doors up to 1-1/2" thick.

**Hole location:** Locate the cylinder hole up to 2-5/8" from the edge of the door.


**Five sizes of drill bushings for versatility:**

3/4", 7/8", 1", 1-1/8" and 1-1/4".

These bushings are designed to be used with clean cutting Forstner type drill bits and are not compatible with hole saws, paddle, or spade-type bits.



*Ships standard with four sizes of drill bushings.*

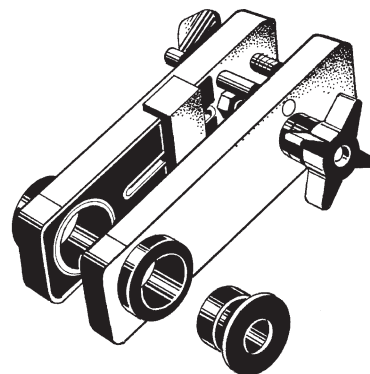

**WARNING:** This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



**OLYMPUS<sup>®</sup>**  
**LOCK**  
INC.