

35ft Reflective Photobeam Sensor

E-931-S35RRQ Range: Up to 35ft (11m)

Features:


- For outdoors gates, garage doors, etc.
- Adjustable sensing range
- 12~240 VDC / 24~240 VAC Operation
- Current draw: Up to 40mA@12VDC
- For indoor or outdoor use (IP66)
- Pre-wired 6.5ft (2m) cord
- · Brackets and mounting hardware included
- Compact size
- New single-gang box and wall-mount brackets available



Specifications:

Туре	Retro-reflective
Sensing range	0.5'~35' (0.2~11 m)
Operating voltage	12~240 VDC / 24~240 VAC
Current draw	40mA@12VDC
Response time	10ms (max.)
Light source	IR LED
LEDs	Yellow LED (standby), Red LED (trigger)
Trigger output	SPDT Relay output (NO/NC/COM)
Switching capacity	1A@120VAC / 2A@30VDC
Enclosure	IP66 weatherproof
Operating temperature	-4°~131° F (-20°~55° C)
Mounting brackets	Included

Dimensions:

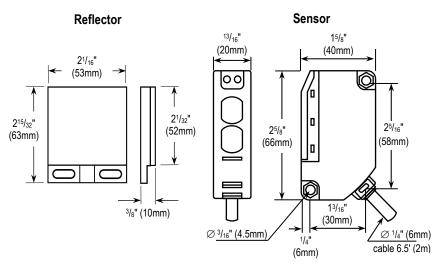

Optional Accessories:



E-931ACC-HR1Q

Reflector hood





E-931ACC-BLS6Q Single-gang flush-mount bracket



E931ACC-BLS7Q L-bracket for side mounting





E931ACC-BLS8Q Wall bracket





SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA, 92606

Phone: (949) 261-2999 | (800) 662-0800 **Fax:** (949) 261-7326 **Website:** www.seco-larm.com **Email:** sales@seco-larm.com



Copyright © 2017 SECO-LARM U.S.A, Inc. All rights reserved.

All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.

The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.