

Trim Selection

RIGID LEVER ESCUTCHEON

CONSTRUCTION


- Rigid, Non-Clutch Mechanism
- Double heavy duty spring support to prevent sagging and enhance operation
- Grade 1, thru-bolted design. Non-handed design.
- Hardened steel heavy duty tailpiece. Available for fire and non-fire rated rim and vertical rod exit devices
- Standard 6-Pin Schlage "C" Mortise Cylinder included

DOOR THICKNESS

Standard 1 $\frac{3}{4}$ ". For 2 $\frac{1}{4}$ " thick door use additional Part # TAIL3

ESCUTCHEON DIMENSIONS

2 $\frac{3}{4}$ " width x 10 $\frac{1}{4}$ " length. Lever length: 4 $\frac{3}{4}$ ".
Fits and covers 2 $\frac{1}{8}$ " 161 cutout

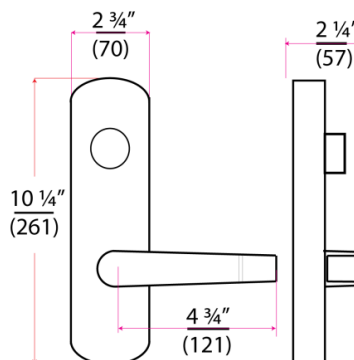

Anti-Microbial Coating
available in US26D Only.
Use part # "**ANTB-TRIM**"
when ordering.

**ESC7700 or
ICESC7700 or
ICSCESC7700**

ENTRANCE

Rigid Entrance, key locks or unlocks escutcheon trim
ANSI Function (08) Operates as classroom function

**ESC7705 or
ICESC7705 or
ICSCESC7705**

STOREROOM

Rigid Storeroom, key unlocks lever, lever retracts
latch bolt, otherwise always locked
ANSI Function (09)

ESC7730

PASSAGE

Trim always operable and free
ANSI Function (14)

ESC7740

DUMMY

Dummy Escutcheon trim ANSI Function (02)

TO ORDER other lever design insert "**AT**", "**RL**", "**TUB**", "**LON**", or "**TAC**" before "**ESC**":
e.g. **ATESC7700** for ESC7700 with AT design.

KEYWAY: 6-Pin solid brass "C" keyway Mortise Cylinder standard. Optional: Schlage E, Schlage C-K, Russwin D1-2-3-4, Corbin 59/60, Sargent LA-LB-LC, Falcon/Weiser E, Arrow A, Yale 8, Yale GA and Kwikset. Can also accept Medeco, Assa, Kaba and **Cal-Royal HSK** High Security Cylinders.

FOR ELECTRIFIED TRIM OPTIONS SEE PAGE 12

⚙️ **(IC) INTERCHANGEABLE CORE:** Interchangeable Core locks will accept compatible 6 or 7-Pin cores with BEST, FALCON and ARROW

⚙️ **(ICSC) INTERCHANGEABLE CORE:** Indicates function available with **Schlage Full Size Format** Interchangeable Core. Corbin, Sargent and Yale format also available.

Lever Trim Designs



ESC



AT



RL



TUB



LON



TAC

Trim Selection



HEAVY DUTY STAINLESS STEEL CLUTCH LEVER

ESCUTCHEON (High Frequency Abusive Situation such as Schools, Hospitals, Industrial / Institutional)

CONSTRUCTION

- Clutch mechanism
- Double heavy duty spring support to prevent sagging and enhance operation
- Grade 1, thru-bolted design. Non-handed design.
- All Stainless Steel heavy duty tailpiece.
Available for fire and non-fire rated rim and vertical rod exit devices
- Standard 6-Pin Schlage "C" Mortise Cylinder included

DOOR THICKNESS


Standard 1 3/4" to 2".

For 2" or 2 1/2" thick door use additional Part # TAIL9

ESCUTCHEON DIMENSIONS

2 5/8" width x 10 5/8" length. Lever length: 4 5/8".

Fits and covers 2 1/8" 161 cutout



HDESC-00 or

• ICHDESC-00

• ICSCHDESC-00

HDTSESC-00

• ICHDTSESC-00

• ICSCHDTSESC-00

ENTRANCE

Clutch Entrance, key locks or unlocks escutcheon trim.

ANSI Function (08)

Operates as classroom function

HDESC-05 or

• ICHDESC-05

• ICSCHDESC-05

HDTSESC-05

• ICHDTSESC-05

• ICSCHDTSESC-05

STOREROOM

Clutch Storeroom, key unlocks lever, lever retracts latch bolt, otherwise always locked. ANSI Function (09)

HDESC-30

HDTSESC-30

PASSAGE

Trim always operable and free
ANSI Function (14)

HDESC-40

HDTSESC-40

DUMMY

Dummy Escutcheon trim
ANSI Function (02)

TO ORDER RL lever design,
add "RL" after "HD" when
ordering.

e.g. HDRLESC-00 for
HDESC-00 with RL design.

KEYWAY: 6-Pin solid brass "C" keyway Mortise Cylinder standard. Optional: Schlage E, Schlage C-K, Russwin D1-2-3-4, Corbin 59/60, Sargent LA-LB-LC, Falcon/Weiser E, Arrow A, Yale 8, Yale GA and Kwikset. Can also accept Medeco, Assa, Kaba and **Cal-Royal HSK** High Security Cylinders.

• **(IC) INTERCHANGEABLE CORE:** Interchangeable Core locks will accept compatible 6 or 7-Pin cores with BEST, FALCON and ARROW

• **(ICSC) INTERCHANGEABLE CORE:** Indicates function available with **Schlage Full Size Format** Interchangeable Core. Corbin, Sargent and Yale format also available.

Lever Trim Designs



HDESC



TS



RL

Anti-Microbial Coating
available in US32D Only.
Use part # "**ANTB-TRIM**"
when ordering.

**FOR ELECTRIFICATION OPTION:
SPECIFY ITEM # UPON ORDERING**

**TO ORDER "RL" OR "TS" LEVER DESIGN,
REPLACE "HD" WITH "RL" OR "TS".**

ITEM#	DESCRIPTION
FS12HD	FAIL-SAFE (FS) OPTION 12V AC / DC
FS24HD	FAIL-SAFE (FS) OPTION 24V AC / DC
FSE12HD	FAIL-SECURE (FSE) OPTION 12V AC / DC
FSE24HD	FAIL-SECURE (FSE) OPTION 24V AC / DC