

Sesamee 930-KIK



Open Lock Step:

1. Insert the key.



2. Turn 90 degree.



3. Pull out the whole plug.



Change Cylinder:

1. Insert the key.



2. Pull out the whole cylinder and take an allen key.



3. Take out the hex socket screw.



4. Take out the whole cylinder.



****IMPORTANT****

**Do not let the small pin fall down.
Just keep it upward or push thumb on it
to avoid dropping out.**




5. Use screwdriver and take out the screw.



6. Pull out the cylinder from housing.



7. Take out the cylinder cover.

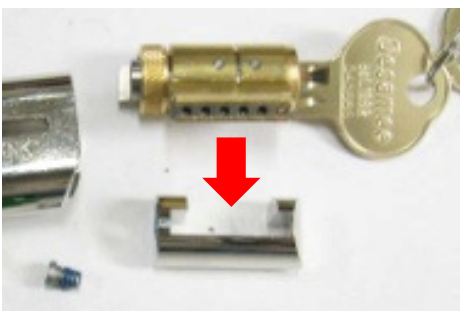

8. Take another cylinder with cover.



9. Put the cylinder into the housing.
Use a screwdriver to fix the screw.



10. Put the whole cylinder into lock body.
Use an allen key to insert
the hex socket screw.



11. Done.

