



Instructions







Pistolpick™

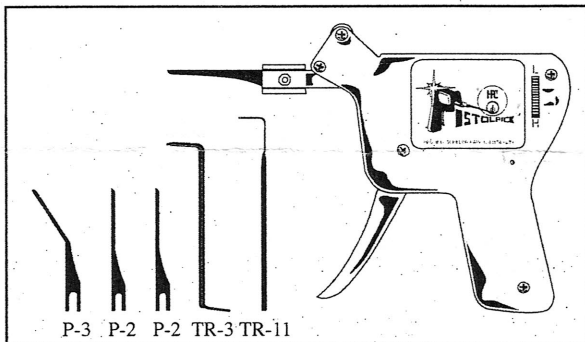

No. HPG-10

The Pistolpick™ comes complete with 3 picks and 2 tension tools. Additional picks and replacement picks are available.

1. Install pick on HPC Pistolpick™ as shown (see Fig. 1). Loosen the nut and bolt. Slide the fork end of the pick between the retainer plates. Replace the nut and bolt. Tighten firmly with a wrench (pliers) and a screwdriver.
2. Pistolpick™ is now ready for operation. When inserting into the keyway remember to keep the pick perpendicular to the pins and wafers as shown (see Fig. 2). Do not twist Pistolpick™ sideways in the keyway or work the Pistolpick™ up and down as shown (Fig. 3).
3. To adjust the impact on the pick use the adjustment screw (see Fig. 4). Turn the thumb screw down for heavy impact and up for light impact.
4. You are now ready to pick. Use a tension tool in the same manner as with our hand lock picks or rakes. Insert pick. Pull the trigger repeatedly. The pick should freely strike the pins. Vibrations caused by repeated clicking of Pistolpick™ can loosen nut and bolt. If this should happen, tighten firmly with a wrench (or pliers) and a screwdriver.

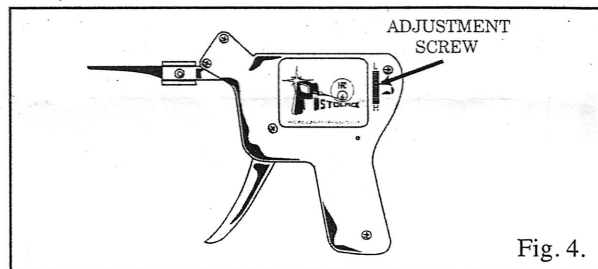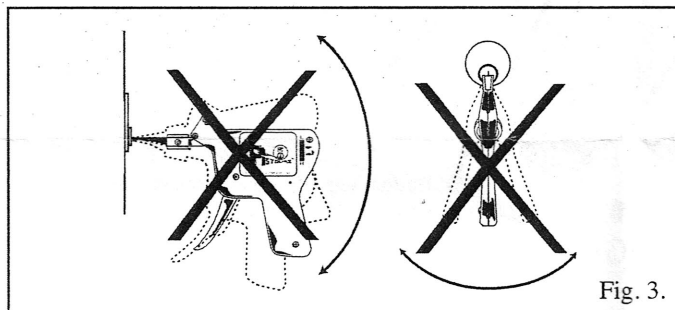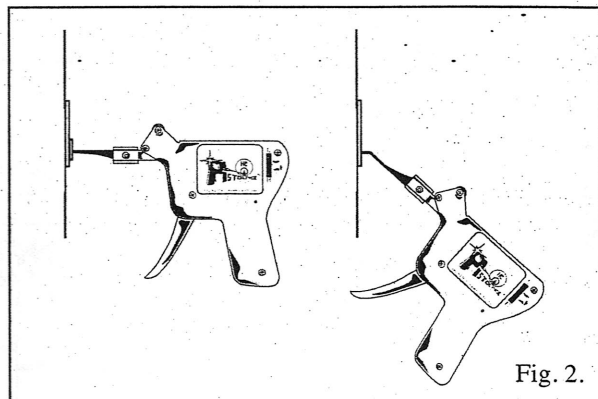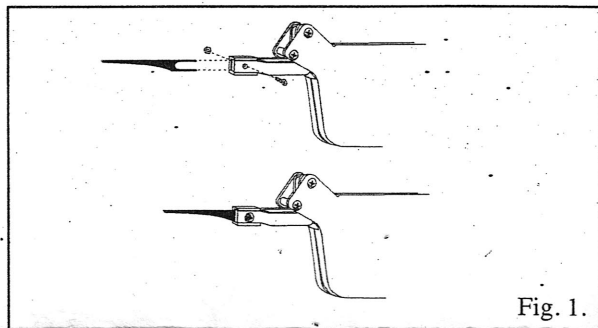

030910 35T00-169-00

Instructions




Pistolpick™ Replacement Set

PARTS LIST

Stock No.	Description
HPG-A	Flat Spring ("L" Bracket)
HPG-C	Coil Spring for Trigger
HPG-D	Trigger Assembly
HPG-F	Adjustment Knob and Screw
HPG-H	Housing Screws (5)
HPG-I	Spring

No. HPG-RS

Your Pistolpick™ is easy to repair. It can be opened with a screwdriver and most moving parts can be easily replaced.

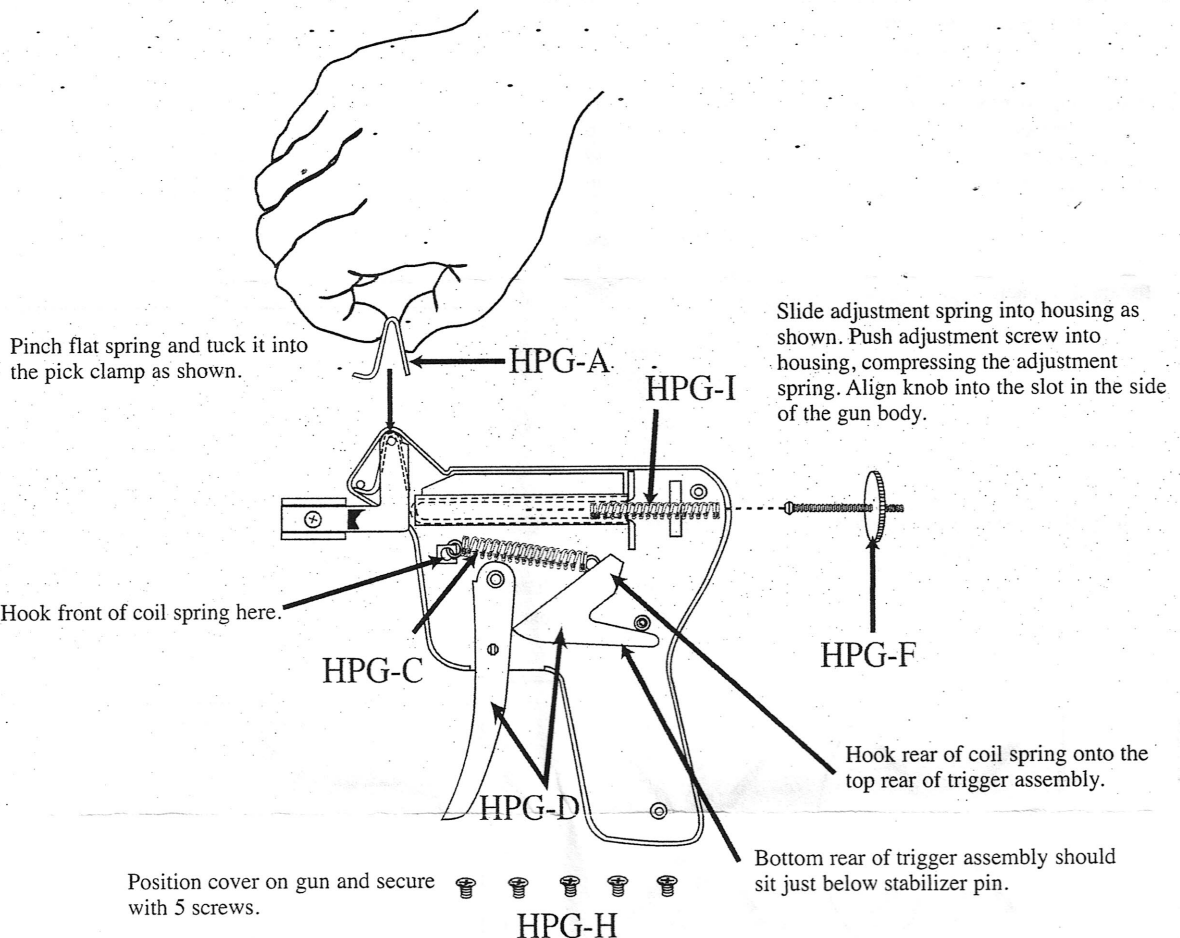

030910