



# RCI 2018/19 Product Catalogue - Keypads & Readers

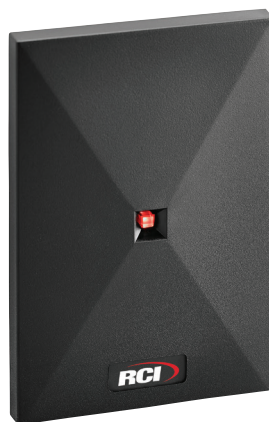


# RCI Keypads & Readers

Using RFID technology, RCI readers interface with a wide range of electronic access control systems by complying with the Wiegand communication protocol.

	Interface 26-Bit, Wiegand Output, HID® & AWID® Supported		Environment Rugged, Weather- Resistant Design		Warranty Lifetime Limited Warranty		Access Control Listed To UL 294
--	--	--	--	--	--	--	------------------------------------

- Electronics are sealed in tamper and weather-resistant epoxy potting
- Includes black & beige snap-on covers

- Convenient plug-in wiring terminals
- Certifications: UL294 Listed for Access Control Unit Accessory, FCC, ICC, CE, ETL

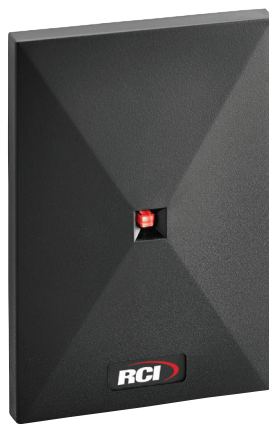

## 5355R 125kHz Proximity Reader & Keypad Combo

Ideal for dual authentication or simple access via PIN or credential applications. 3"W x 4-5/8"H x 3/4"D (76mm x 117mm x 19mm)

## 5395R 125kHz Proximity Reader

Compact design ideal for single gang wall-box applications. 3"W x 4-5/8"H x 3/8"D (76mm x 117mm x 10mm)

## 6005R 125kHz Mullion Proximity Reader

Slim design ideal for areas with minimal surface space to mount. 1-11/16"W x 3-3/16"H x 11/16"D (43mm x 80mm x 17mm)

	Energy 110mA <sup>1</sup> , +5 – 16VDC
	Frequency & Range 125kHz, Up to 5" (127mm) <sup>2</sup>

	Energy 110mA <sup>1</sup> , +5 – 16VDC
	Frequency & Range 125kHz, Up to 6-1/2" (165mm) <sup>2</sup>

	Energy 110mA <sup>1</sup> , +5 – 16VDC
	Frequency & Range 125kHz, Up to 5" (127mm) <sup>2</sup>

### How To Order

5355R

### How To Order

5395R

### How To Order

6005R

<sup>1</sup>Max at 12VDC

<sup>2</sup>Using 1326R Proximity Card (Clamshell) with 12VDC at the reader

# RCI Keypads & Readers



## 1326R 125kHz Proximity Clamshell Card

Passive proximity cards and fobs for physical access control.  
2-3/16"W x 3-3/8"H x 1/16"D  
(56mm x 86mm x 1.5mm)



## 1386R 125kHz Proximity Printable Card

Passive proximity cards and fobs for physical access control.  
2-1/16"W x 3-3/8"H x 1/32"D  
(53mm x 86mm x 0.79mm)

 Interface  
26-Bit, Wiegand,  
HID® & AWID®  
Supported

 Frequency & Range  
125kHz  
Up to 6-1/2" (165mm)<sup>1</sup>

 Interface  
26-Bit, Wiegand,  
HID® & AWID®  
Supported

 Frequency & Range  
125kHz  
Up to 6-1/2" (165mm)<sup>1</sup>

- Up to 5-1/2" (140mm) read range
- Made of ABS
- Off-white finish
- Lifetime limited warranty

<sup>1</sup>Using 5395R Proximity Reader at 12VDC

- Up to 5" (127mm) read range
- Made of PVC
- Glossy white finish
- 1 year limited warranty

<sup>1</sup>Using 5395R Proximity Reader at 12VDC



## 1314R 125kHz Proximity Thick Printable Card

Passive proximity cards and fobs for physical access control.  
2-1/16"W x 3-3/8"H x 1/16"D  
(53mm x 86mm x 1.17mm)



## 1346R 125kHz Proximity Fob

Passive proximity cards and fobs for physical access control.  
1-1/2"W x 1-3/16"H x 1/8"D  
(38mm x 30mm x 3.8mm)

 Interface  
26-Bit, Wiegand,  
HID® & AWID®  
Supported

 Frequency & Range  
125kHz  
Up to 6-1/2" (165mm)<sup>1</sup>

 Interface  
26-Bit, Wiegand,  
HID® & AWID®  
Supported

 Frequency & Range  
125kHz  
Up to 6-1/2" (165mm)<sup>1</sup>

- Up to 6-1/2" (165mm) read range
- Made of PVC
- Glossy white finish
- Lifetime limited warranty

<sup>1</sup>Using 5395R Proximity Reader at 12VDC

- Up to 4-1/2" (114mm) read range
- Made of ABS
- Gray finish
- Lifetime limited warranty

<sup>1</sup>Using 5395R Proximity Reader at 12VDC

### How To Order

Card Type				Quantity	
26	-Clamshell	10	-10 Pack		
86	-Printable	25	-25 Pack		
14	-Thick Printable	50	-50 Pack		
46	-Fob				
13		R	-		
		H	-Certain HID®		
		A	-Certain AWID®		

**Supported Data Protocol<sup>1</sup>**

<sup>1</sup>RCI protocol standard, must specify HID® or AWID® if required

# RCI Keypads & Readers

## 9325 Keypads

Single door standalone access control solution for surface-mount applications.  
 2-3/4"W x 4-1/2"H x 1-5/32"D (70mm x 114mm x 29mm)

	Energy 200mA Max 12VDC		Environment Rugged, Weather-Resistant Model Available
	Warranty 2 Year Limited Warranty		Mode Field-Selectable Fail-Safe & Fail-Secure
	Users Supports Up To 120 Users		



- Supports up to 120 users
- EEPROM memory ensures programming remains intact when unit is not powered
- Secure access codes (4-8 digits)
- Backlighting (can be disabled)
- Silent mode (audible annunciation of key presses can be disabled)
- Programmable lockout
- Variable output time delay (1-60 sec.)
- Input trigger for request-to exit or other open circuit contact
- Black finish

### How To Order







		Type
	i	-Interior
	iLW	-Interior or Exterior Illuminated
9212		

# RCI Keypads & Readers



## 9212i Keypad

Single door standalone access control solution for single gang flush mount applications.  
For interior use.  
2-3/4"W x 4-1/2"H x 1-1/4"D (70mm x 114mm x 32mm)

 Energy 45mA <sup>1</sup> Field-Selectable 12-24VAC/VDC	 Environment Rugged, Weather-Resistant Model Available
 Warranty 2 Year Limited Warranty	 Mode Field-Selectable Fail-Safe & Fail-Secure
 Interface EEPROM Memory	 Users Supports Up To 120 Users

- Four independent outputs (assignable by code) and timers
- All outputs programmable for latched or timed operation
- Supports up to 120 users
- EEPROM memory ensures programming remains intact when unit is not powered
- Single gang flush-mount design
- Secure access codes (4-8 digits)
- Silent mode (audible annunciation of key presses can be disabled)
- Electronics mounted on back of keypad
- Input trigger for request-to exit or other open circuit contact
- Three LED's to indicate status and provide user with visual PIN entry confirmation
- Red/Green LED's indicates relay status
- Stainless steel faceplate







### How To Order

	<b>Type</b>
i	-Interior
e	-Exterior
9325	



## 9212iLW Illuminated Keypad

Single door standalone access control solution for single gang flush mount applications.  
For interior or exterior use.  
3-3/8"W x 5-1/8"H x 5/8"D (86mm x 130mm x 16mm)

 Energy 198mA <sup>1</sup> Auto-Sensing 12-24VAC/VDC	 Environment Rugged, Weather-Resistant Model Available
 Warranty 2 Year Limited Warranty	 Mode Field-Selectable Fail-Safe & Fail-Secure
 Interface EEPROM Memory	 Users Supports Up To 120 Users

- Backlit, hardened keys
- Heavy chrome plated trim ring
- Key press feedback via sounder and yellow LED
- Built-in assignable sounder
- Programmable lockout• Supports up to 120 users
- EEPROM memory ensures programming remains intact when unit is not powered
- Single gang flush-mount design
- Secure access codes (4-8 digits)
- Silent mode (audible annunciation of key presses can be disabled)
- Electronics mounted on back of keypad
- Input trigger for request-to exit or other open circuit contact
- Three LED's to indicate status and provide user with visual PIN entry confirmation
- Red/Green LED's indicates relay status
- Stainless steel faceplate

### How To Order

	<b>Type</b>
i	-Interior
iLW	-Interior or Exterior Illuminated
9212	

# RCI Keypads & Readers




## 9320 Easy Read-Prox® Slimline Reader Reader + Stand Alone

One self-contained unit, single-door standalone access control solution for surface or mullion mount for interior or exterior use.  
1-1/2"W x 3-1/16"H x 1/2"D (38mm x 78mm x 12.7mm)

## 9321 Easy Read-Prox® Slimline Reader Reader + Controller

Two separate components, single-door standalone access control solution for surface or mullion mount for interior or exterior use.  
1-1/2"W x 3-1/16"H x 1/2"D (38mm x 78mm x 12.7mm)

 Energy 1,000mA <sup>1</sup> 12VDC	 Environment Rugged, Weather-Resistant Design	 Warranty 2 Year Limited Warranty	 Read Range Up To 2-3/8" (60mm) <sup>2</sup>
 Mode Field-Selectable Fail-Safe & Fail-Secure	 Users Supports Up To 10,000 Users		

<sup>1</sup>Max  
<sup>2</sup>Using 932-10CP Card, 1-9/16" (40mm) using 932-10KP Fob

- Easy to install
- Supports up to 10,000 users
- Aesthetically pleasing surface or mullion mount design
- Access validation – Silent3/Audible/Visual
- Deny access without retrieving user's card or fob
- No separate programmer required
- Input trigger for request-to exit or other open circuit contact
- Includes black & white snap-on covers
- Proximity cards and fobs are available in packs of 10 (sold separately)

### How To Order

Type	
0	–Reader + Controller (One Self-Contained Unit)
1	–Reader + Controller (Two Separate Components)
1SPB	–Reader Only (No Control Board)


932

### Accessories

Model	Description
932-10CP	Encoded card starter pack, 10 pack, includes wallet and programming cards
932-10KP	Encoded fob starter pack, 10 pack, includes wallet and programming cards

<sup>3</sup>9320 only. Does not apply to 9321.

# RCI Keypads & Readers









## 9322 Easy Read-Prox® Micro Reader Reader + Stand Alone

One self-contained unit, single door standalone access control solution for flush mount applications for interior or exterior use. 1-3/16" W x 1-7/8" H x 5/16" D (29.5mm x 48mm x 8.5mm)

## 9323 Easy Read-Prox® Micro Readers Reader + Controller

Two separate components, single door standalone access control solution for flush mount applications for interior or exterior use. 1-3/16" W x 1-7/8" H x 5/16" D (29.5mm x 48mm x 8.5mm)

 Energy 1,000mA <sup>1</sup> 12VDC	 Environment Rugged, Weather- Resistant Design	 Warranty 2 Year Limited Warranty	 Read Range Up To 2-3/8" (60mm) <sup>2</sup>
 Mode Field-Selectable Fail-Safe & Fail-Secure	 Users Supports Up To 10,000 Users		

<sup>1</sup>Max  
<sup>2</sup>Using 932-10CP Card, 1-9/16" (40mm) using 932-10KP Fob

- Easy to install
- Supports up to 10,000 users
- Aesthetically pleasing flush mount design
- Access validation – Silent3/Audible
- Deny access without retrieving user's card or fob
- No separate programmer required
- Input trigger for request-to exit or other open circuit contact
- Includes black & white snap-on covers
- Proximity cards and fobs are available in packs of 10 (sold separately)

### How To Order

Type	
2	-Reader + Controller (One Self-Contained Unit)
3	-Reader + Controller (Two Separate Components)
3MP	-Reader Only (No Control Board)
932	

### Accessories

Model	Description
932-10CP	Encoded card starter pack, 10 pack, includes wallet and programming cards
932-10KP	Encoded fob starter pack, 10 pack, includes wallet and programming cards

<sup>3</sup>9322 only. Does not apply to 9323.

# Terms & Conditions

---

**Freight**

Transportation and handling charges on all goods are prepaid by RCI, and billed back to the customer, unless otherwise specified. Free freight will apply on all orders of US\$4000.00 net or more per purchase order within the continental United States, unless otherwise specified. Carrier to be selected by RCI; air freight and other requested shipments will be at the expense of the customer. Handling is added to freight.

**Product Changes**

RCI reserves the right to discontinue models and/or make changes at anytime in materials, parts, components, specification, etc., without notice and without incurring any obligations on models built prior to the change.

**Shortages**

A written claim for shortages must be made within 10 days after receipt of the order.

**Templates**

Templates are available for all standard products, special templates and wiring diagrams for custom orders are available upon request for a minimal fee.

**Defective Products**

Products that exhibit defects in any material and/or workmanship will be replaced by the factory upon verification by a local representative or the technical department at RCI. All returns must be issued a returned material authorization (RMA) number prior to being sent back to our facility. Returns can be done immediately or periodically, depending on the urgency. They will be addressed promptly. Warranty information is available upon request for individual products.

**Cancelled Orders**

Cancelled orders are subject to an additional charge. Cancellation will not be accepted of goods that are not regular stock items, such as special orders. Damage Claims – Title passes to the customer upon delivery to the carrier. Loss and damage claims must be filed with the carrier by the customer. Disputes with the carrier do not alter our payment terms and are the responsibility of the customer.

**Credit Balance**

Any resulting credit balance on a customer's account for returns or any reason other than RCI's error, must be used as a credit against future purchases. Checks will not be issued to pay off a credit balance, other than due to RCI's error.

**Prices**

Orders are accepted with the understanding that they will be billed at prices in effect at the time of shipment, except when firm prices have been quoted. Prices are subject to change without notice.

**FOB**

Prices are FOB our warehouse. Upon pick-up by the transportation company, shipments become the property of the purchaser, who assumes the risk of loss or damage in transit.

**Payment Terms**

Payment terms are NET 30 DAYS to customers with approved credit. Cash discount terms of 2% - 10 days are available unless otherwise stated. We reserve the right to withhold shipment to accounts that do not meet our payment terms. State sales tax is extra where applicable.

**Returned Goods**

Any defects or errors for which RCI is responsible for will be promptly rectified. Returned goods will not be accepted without prior approval and a returned material authorization (RMA) number, which must appear on all documentation relating to the returned merchandise. The original invoice number and purchase order number is required for all returns. All returns must be shipped with freight prepaid. Returned goods are subject to a minimum restocking charge of 20%. There may be additional charges to replace any abused or misused parts or components to restore the product to its original or saleable condition. Time limit for returning merchandise is 30 days after authorization, unless otherwise stated.

**Special Order Returns**

Returns of "Special Orders" will not be authorized.

**C.O.D.**

While processing a credit application, RCI may require your initial order C.O.D. We reserve the right to make C.O.D. shipments at our discretion.

**Discounts**

All discounts are subject to foreign exchange fluctuations, changes in import duties, and other applicable taxes.

**E&OE**

Errors and Omissions Excepted.

**Minimum Charge**

No minimum charges apply.



dormakaba Canada Inc.  
65 Struck Court  
Cambridge, ON Canada N1R 8L2  
Tel: 800-265-6630  
Fax: 800-482-9795  
sales\_RCI@dormakaba.com  
www.dormakaba.us