
ADDITIONAL INSTRUCTION STEP 6 Adding Tablet Holder

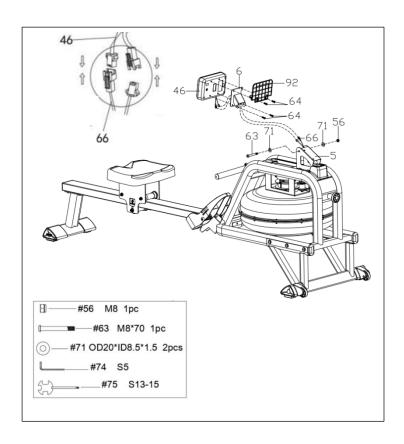

Remove 4 Screws (No. 64) from the Meter (No. 46) using Spanner (No. 75).

Pull the wires of Meter (No. 46) through the Support Plate (No. 6), then lock the Meter (No. 46) and Tablet Holder (No. 92) to the Support Plate (No. 6) with 4 Screws (No. 64) that were just removed.

Connect 2 Sensor Wires (No. 66) with the link wires of Meter (No. 46).

Attach Support Plate (No. 6) to Sensor Stand (No. 5) using 1 Bolt (No. 63), 2 Washers (No. 71), and 1 Nylon Lock Nut (No. 56). Tighten with Allen Wrench (No. 74) and Spanner (No. 75).

Make sure it is not too tight to adjust the angle of **Meter (No. 46)**.