


UNDERCOUNTER DISHWASHER


DS 50 T

- **Partial drain and fill operation**
- **Double walled 304 stainless steel structure**
- **3 wash cycles**
- **Quick glasswasher cycle**
- **Pressed in basket supports**
- **Double skin door with security micro switch**
- **Deep-drawn and inclined tank for a perfect total drain**
- **Anti-drip roof design to reduce spotting**
- **Lightweight wash and rinse arms**
- **Easy to remove nozzles for daily cleaning**
- **Back flow prevention valve**
- **PLUS Thermostop System: rinse starts only when the water in the boiler reaches 85°C**
- **Detergent, rinse & drain pumps are included**

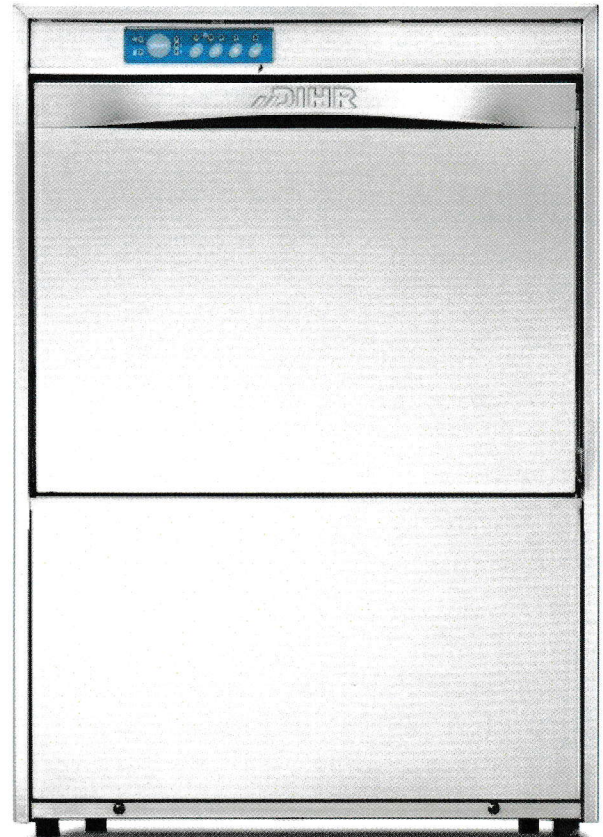

Be sure to ask about our **3M** water filters and water softeners to improve your final results and extend the life of your equipment...



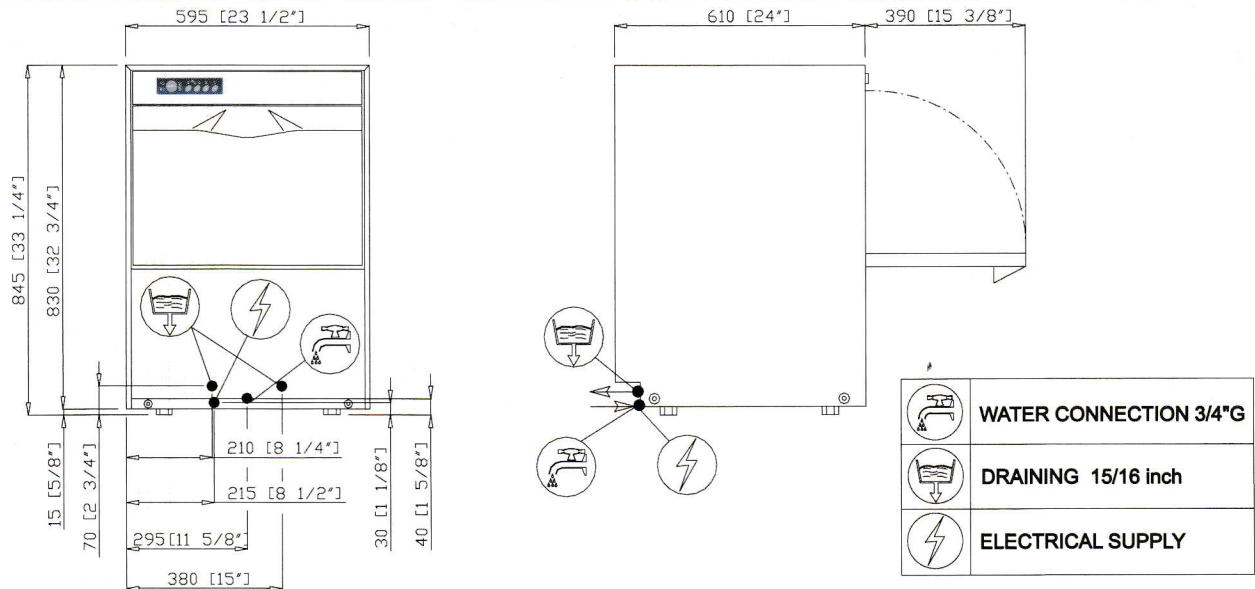

TECHNICAL DATA		STANDARD		
EXTERNAL DIMENSIONS				
width	(inch)	23 1/2"		
depth	(inch)	24"		
height	(inch)	33 1/4"		
WEIGHT	(lbs)	134		
VOLTAGE		220-240 V 1 60Hz		
POWER REQUIRED	(W) [Ampere]	5150 W [22.9 A]		
WATER HARDNESS		2-8 °F		
INLET WATER PRESSURE		25-60 PSI		
CHINA DIMENSIONS				
plates diameter	(inch)	12 3/4"		
dishes max. height	(inch)	12 1/4"		
RACK DIMENSIONS	(inch)	20"x20"		
RACK EQUIPMENT		1XC40 - 1XC44 - 1X15060		
WASHING CYCLES	(sec)	1<90>	2<120>	3<180>
WATER SUPPLY 55°C				
racks/h(*) ⁽¹⁾		40	30	20
WATER SUPPLY 10°C				
racks/h(*) ⁽¹⁾		20	20	20
WATER CONSUMPTION / CYCLE (water pressure 200kPa)	[gal(US)]	0.60		
BOILER CAPACITY	[gal(US)]	1,5		
BOILER HEATING ELEMENT		4500 W		
RINSING TEMPERATURE (SET)		85°C		
TANK CAPACITY	[gal(US)]	6,87		
TANK HEATING ELEMENT		2700 W		
TANK TEMPERATURE (SET)		65°C		
PUMP POWER		650 W (89,8 gal(US)/min***)		
DRAIN PUMP (optional)		25w hMAX 31 1/2"(10,56 gal(US)/min***)		
NOISE		59.3 dB(A)		

(*) STANDARD THERMOSTOP

⁽¹⁾ In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.