



MJ40 Gas Fryers

Project _____
 Item _____
 Quantity _____
 CSI Section 11400 _____
 Approval _____
 Date _____

MJ40 Gas Fryers -- Domestic & Export

Models

MJ140



MJ140

Standard Features

- Open-pot design is easy to clean
- 40-lb (20-liter*) oil capacity
- 110,000 Btu/hr. input (27,700 kcal) (32.2 kw)
- Frying area 12" x 15" x 4-1/4" (30.5 x 38.1 x 10.8 cm)
- Master Jet burner system distributes heat evenly for efficient heat exchange and quick recovery
- Millivolt controller, no electric connection required
- Stainless steel frypot, door and cabinet
- Reliable, centerline, fast-action temperature probe
- Deep cold zone, 1-1/4 in. (3.2 cm) IPS ball-type drain valve
- Two twin baskets
- 6" (15.2 cm) legs with 1" (2.5 cm) adjustment and casters
- 3/4" gas connection
- EZSpark™ push-button ignitor
- Over-the-flue basket hangers

Options & Accessories

- Spreader cabinet
- Frypot cover
- Full basket
- Sediment tray
- Splash shield

See Frymaster domestic price list for other available options and accessories.

Specifications

Unsurpassed in their versatility, proven worldwide performance and low maintenance needs


The MJ40 gas fryers are unsurpassed in their versatility, controlled performance and low maintenance needs. The MJ40 fryers offer options that accommodate a wide range of frying needs -- everything from French fries, pre-breaded products to specialty foods.

The Master Jet burner system distributes heat evenly around the frypot, generating a large heat-transfer area for efficient exchange and quick recovery. They have earned a legendary reputation for durability and reliability. The MJ burners require no burner cleaning or air shutter adjustment. The reliable centerline fast-action temperature probe assures accurate temperatures for efficient heat-up, cooking and recovery.

The large cold zone and forward sloping bottom help collect and remove sediment from the frypot to safeguard oil quality and support routine frypot cleaning. The standard front flush feature deflects oil out from the back of the frypot, moving sediment to the front drain valve for easy and thorough removal.

The optional spreader can include a heat lamp and holding station. The holding station can use either cafeteria-style or scoop-type pan. The heat lamp and pans are integrated into the cabinet, making a complete warming station.

*Liter conversions are for solid shortening @ 70°F




8700 Line Avenue
Shreveport, LA 71106-6800
USA

Tel: 318-865-1711
Tel: 1-800-221-4583
Fax: 318-868-5987
E-mail: info@frymaster.com

www.frymaster.com
Bulletin No. 818-0008
Revised 11/1/16



MJ40 Gas Fryers -- Domestic & Export

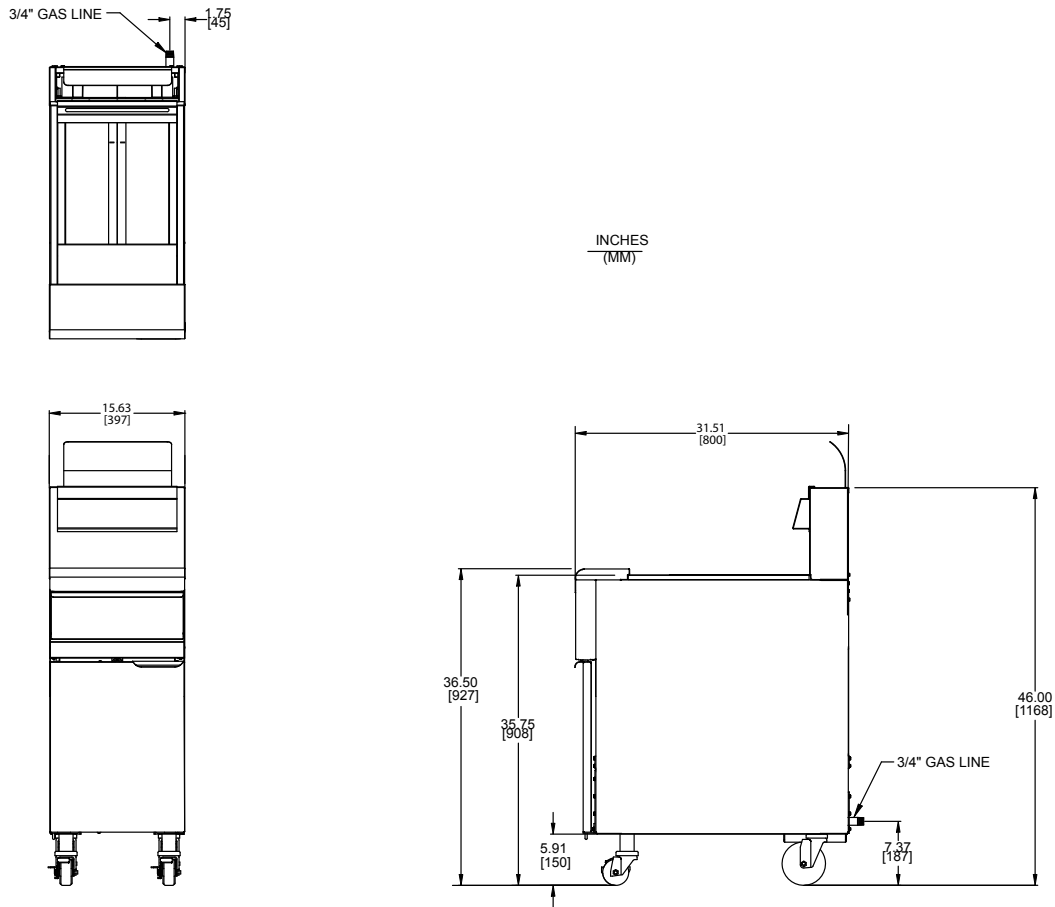

DIMENSIONS

| MODEL NO. | OIL CAPACITY | OVERALL SIZE (cm) | | | DRAIN HEIGHT | NET WEIGHT | SHIPPING INFORMATION | | | | | |
|-----------|------------------------|-------------------|-------------------|----------------|----------------------|---------------------|-----------------------|-------|---------|---------------------------|---------------------------|------------------------------|
| | | WIDTH | DEPTH | HEIGHT | | | WEIGHT | CLASS | CU. FT. | DIMENSIONS (cm) | | |
| MJ140 | 40 lbs. (20 liters) | 15-5/8" (40.0) | 31-1/2" (80.1) | 46" (116.8) | 10-5/8" (27.0 cm) | 145 lbs. (66 kg) | 202 lbs. (91.6 kg) | 85 | 21 | W 22" (56.0) | D 36" (91.4) | H 46-1/2" (108) |

POWER REQUIREMENTS

| MODEL NO. | CONTROLLER |
|-----------|----------------------|
| MJ140 | Millivolt Controller |

NOTES

- Supply voltage 120V 60 Hz -- Control Voltage 24V 60 Hz. 120 VAC 5 ft. (1.5 m) grounded cord set.
- 1-1/2" (3.8 cm) kitchen main manifold gas supply line required. Gas inlet size (I.D.) should be no smaller than that provided for connection to the fryers. See service manual and/or plumbing codes for proper pipe sizing. Recommended minimum store manifold pressure to be 6" W.C. for natural gas and 11" W.C. for L.P. gas. Check plumbing codes for proper supply line sizing to attain burner manifold pressure of 3.5" W.C. natural or 8.25" W.C. L.P.

•DO NOT CURB MOUNT

CLEARANCE INFORMATION

- A minimum of 24" (61 cm) should be provided at the front of the unit for servicing and proper operation, and 6" (15.2 cm) between the sides and rear of the fryer to any combustible material.

HOW TO SPECIFY

The following description will assist with ordering the features desired:

MJ140 40-lb. performance, open-pot gas fryer with millivolt controller; centerline, fast-action temperature probe.

Model # _____
CSI Section 11400

8700 Line Avenue
Shreveport, LA 71106-6814
USA

Tel: 318-865-1711
Tel: 1-800-221-4583
Fax: 318-868-5987
E-mail: info@frymaster.com

www.frymaster.com
Bulletin No. 818-0008
Revised 11/1/16
Litho in U.S.A. ©Frymaster



We reserve the right to change specifications appearing in this bulletin without incurring any obligation for equipment previously or subsequently sold. Check www.frymaster.com for updates.