



DIY handmade goods— COFFEE TIME



NOTICE OF ASSEMBLE

Making tips


1. LED wiring indication:
White=Positive; Grey=Negative.
2. Use a craft blade to carefully skim over the plastic to bare the copper wire.
3. For LED wiring extension, please refer to the below steps:




Twist the copper of both LED wire and extension wire together.




Do the same on the white wire.
Remarks: Tie a knot at the end of the grey wire to differentiate the polarity.




Place the duly twist wire on the tapes provided.



Roll and wrap the wire.




Place another wire next to it.
Remarks: DO NOT contact both copper wire to avoid short circuit.



Roll and wrap it together.

LED wire



Warnings


- The product is not suitable for children under 14 years old. The should be under custody of adults when playing with the product.
- There are small parts, please do not swallow them for avoiding dangerous accidents.

Tips for assembling

1. Pictures shown on the package may be slightly different from the actual product.
2. Please use the provided tracing paper for cutting purpose to achieve the best outcome.
3. Product designs and specification may be subject to change without advance notice for purpose of making improvement.
4. Testing on LED function:



DO NOT contact the LED wire end direct to the battery cell.



Use the provide battery holder. Make sue the correct polarity.

How to assemble the battery holder




1. Material and tools needed:
- Battery holder, LED bulb, tape.




2. Twist the following wire together:
(I) WHITE wire from the battery box with the GREY wire from LED bulb,
(II) GREY wire from the battery box with the WHITE wire from LED bulb.



3. Wrap the exposed wire with the tapes.



4. Tear off the rubber paper



5. Set the black key on the battery box to one side of "ON" as shown.



6. Ture on the power and complete the installation.

Product information



Potted plant






Bouquet




Cup




Cake cabinet

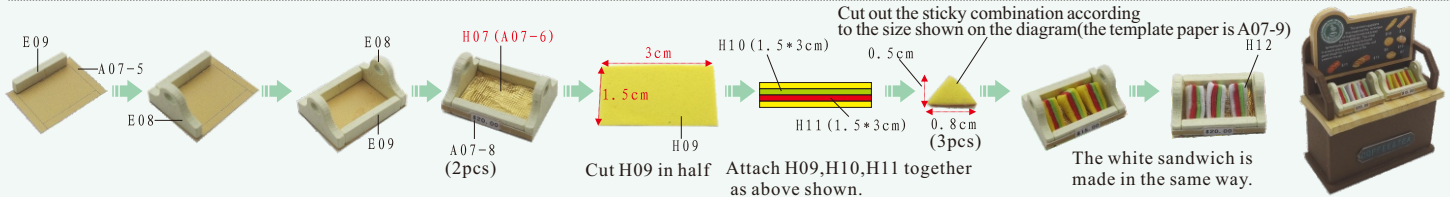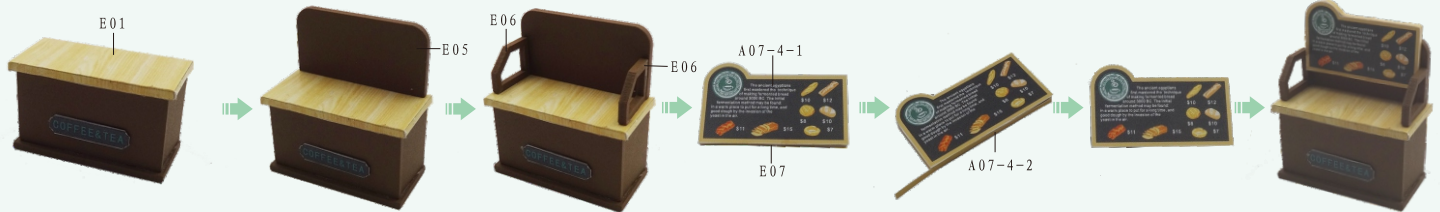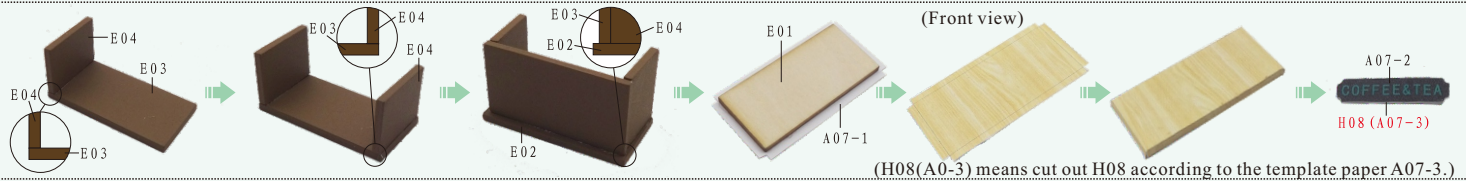


Cut out the sticky combination according to the size shown on the diagram (the template paper is A07-9)

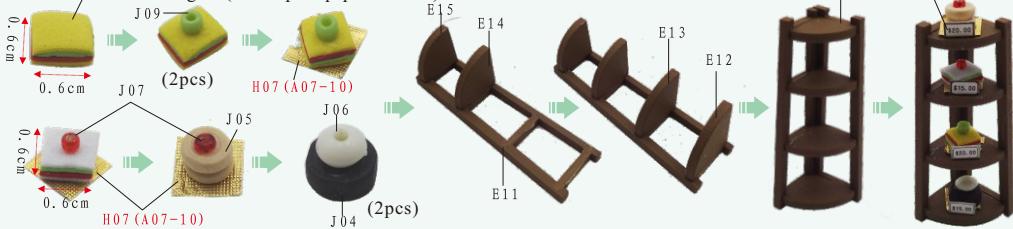


Cut out H07 according to the template of A07-10 as shown.

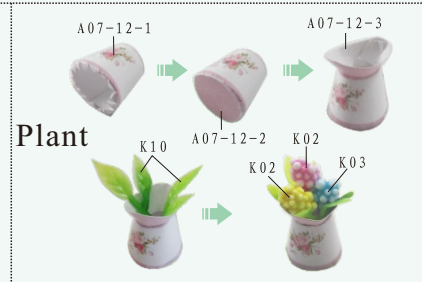


Bar counter

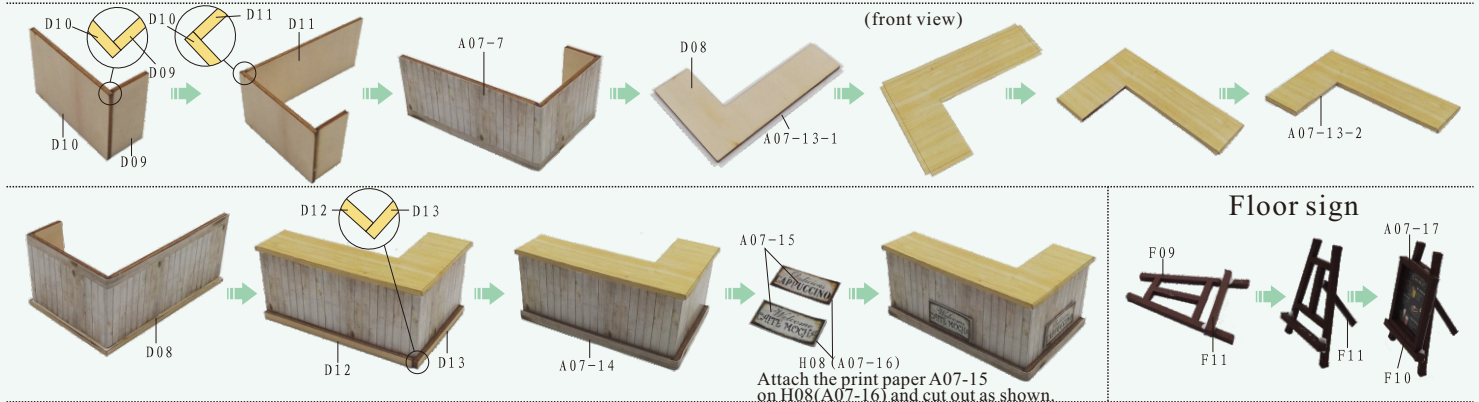

Refrigerator

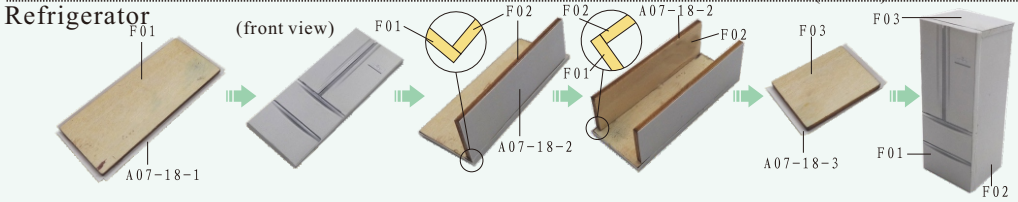


Box

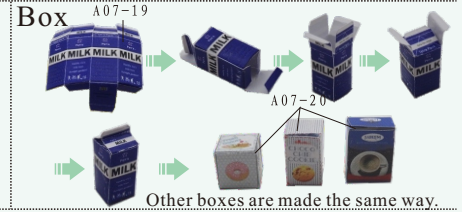

Coffee machina



Plate

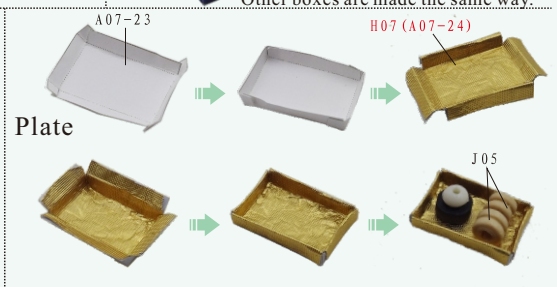


Bar stool




...Cut and bend the wire according to the size shown on the drawing. Then attach it well as shown.

Umbrella

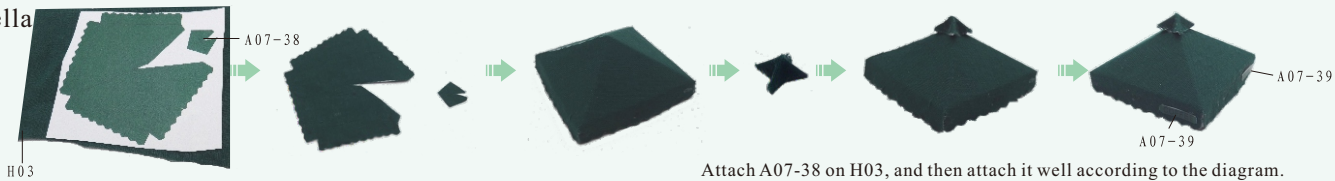


Attach A07-38 on H03, and then attach it well according to the diagram.

Round Table

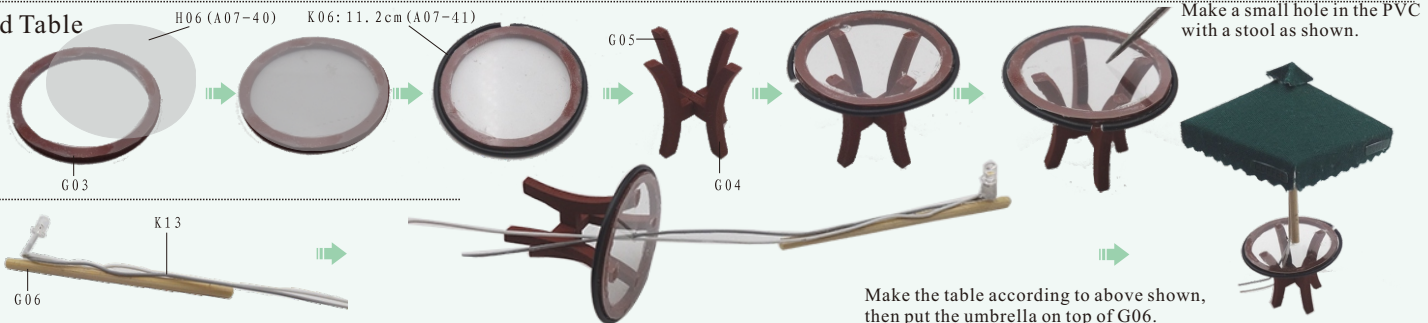


Service plate

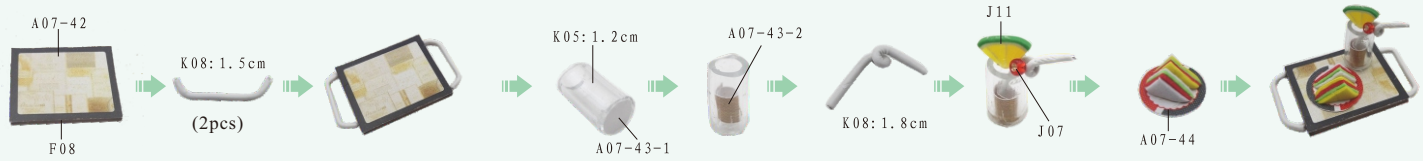


Bag



Memu

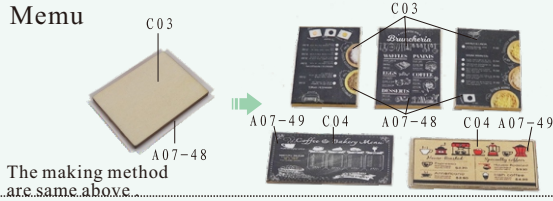


Shop sign

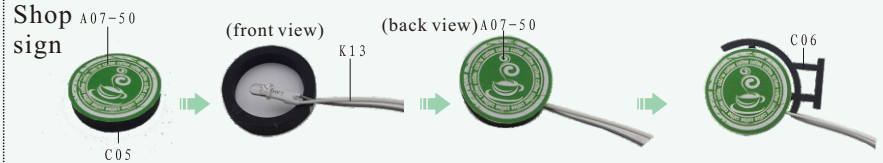


Plant




Flower groove

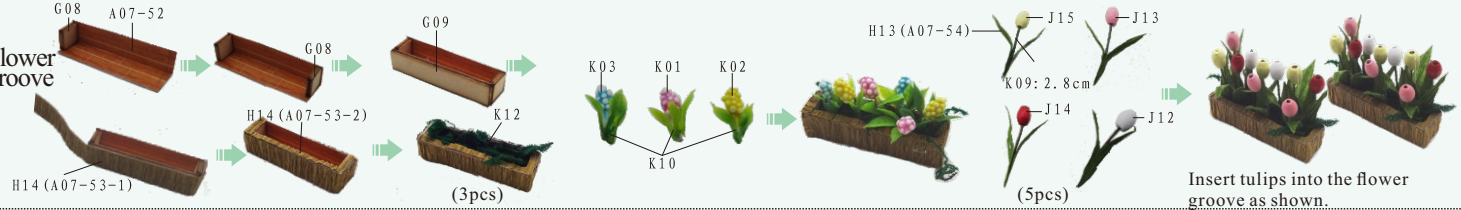








Outer frame

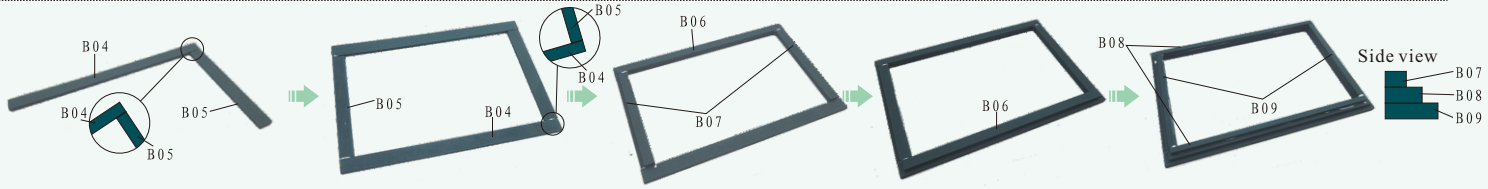

Shop sign

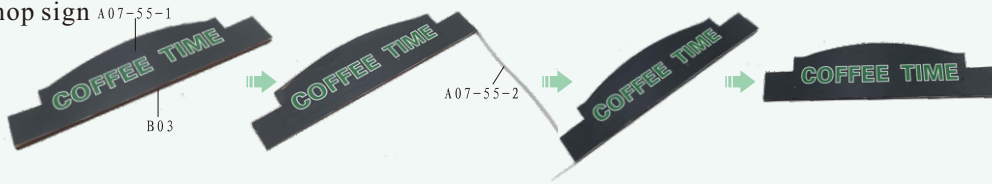

Rain shed

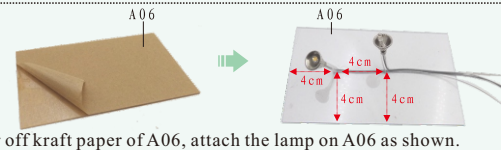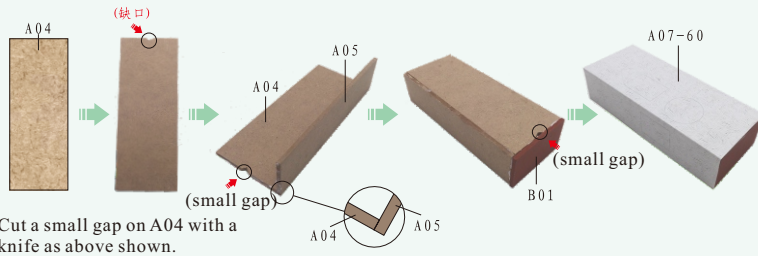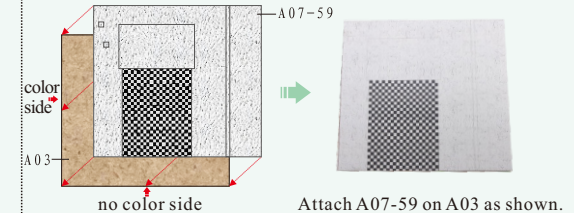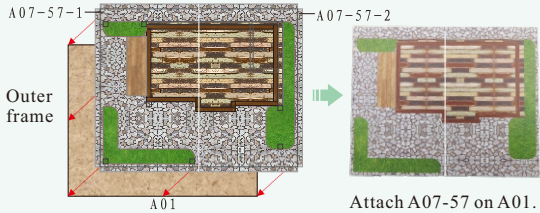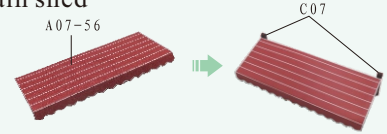

Outer frame

Music machine core manual guide:
(If you have purchased the music machine core, please fix it firstly)

L01 Music machine core 1piece
L02 Music machine core handle 1piece
L03 Screw 3pieces

(Front view) (back view)

To install the machine core well as shown.

A07-61
H08 (A07-62)

Attach A07-61 on H08 and cut it out.
(the template paper is A07-62)

Attach A07-61 on the wall as shown.

Wall cabinet

cone

(small hole)

Poke a small hole in the position shown on the diagram with a cone.

Pass the wire through the hole in A04 and fix A06 well as shown.

C01 C02
G10 G11

menu blackboard

Roof

Shop sign B02

A07-64

Rain shed

Shop sign


Round table

Pass the wire through the hole in A01 as shown.

How to assemble the battery holder

Statement: the lamp wires cannot be inserted into the output socket.

- Please notice the place of anode and cathode when pit in the batteries
- Rechargeable batteries are not blunt electricity
- Rechargeable batteries can only be changed under adult supervision
- Rechargeable batteries should be removed from the toy before charging
- Different types of batteries cannot mix; Do not mix new batteries in use with semi-used batteries.
- Run out of battery should be removed from the toy
- The power shall not be short circuit

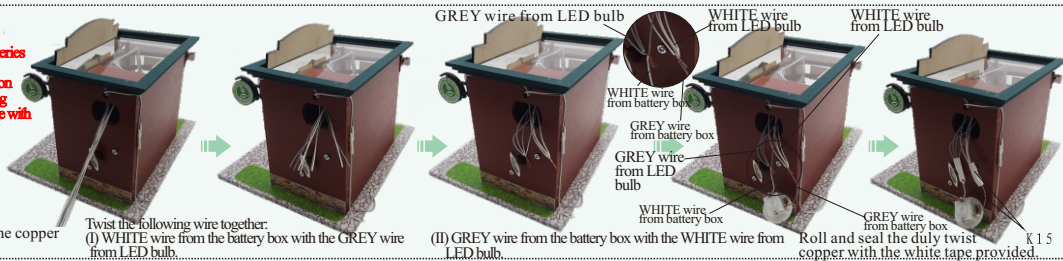

Trim all the LED wiring to the same length.

Use a craft blade to carefully skim over the plastic to bare the copper wire. Twist the same color wire together.

Twist the following wire together.

(I) WHITE wire from the battery box with the GREY wire from LED bulb.

(II) GREY wire from the battery box with the WHITE wire from LED bulb.

Roll and seal the duly twist copper with the white tape provided.



Place the battery box in the allocated space.



Flower



Pot plant



Installation of dust proof cover (For updated version, the parts need to be purchased separately)





L04 Transparent cover
0.15*16*20 (3pieces)



L05 Transparent cover
0.15*15.7*16 (2pieces)



1. Tear off kraft paper of each piece of transparent cover.

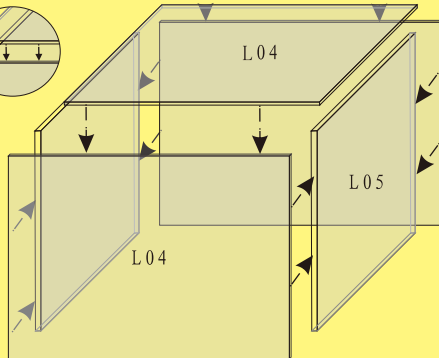

2. Paste L04 and I05 together to complete the dust proof cover as shown.

Photo of Dust proof cover



Photo Gallery



Attention: Please keep the instruction manual for future enquires after installation.