



2014+ Sea Doo Spark Ribbon Delete

SKU(s): 903FS0000

INCLUDED PARTS

| |
|------------------------|
| (1) Ribbon Delete |
| (1) 60-80mm Worm Drive |
| (2) Zip Ties |

REQUIRED TOOLS

| |
|-------------|
| Cutters |
| Screwdriver |
| |



Step 1: Remove the upper hull. See **Sea Doo Spark Hull Removal Instructions**.

Step 2: Locate the throttle body, cut (2) zip ties holding the fuel line to the plenum.

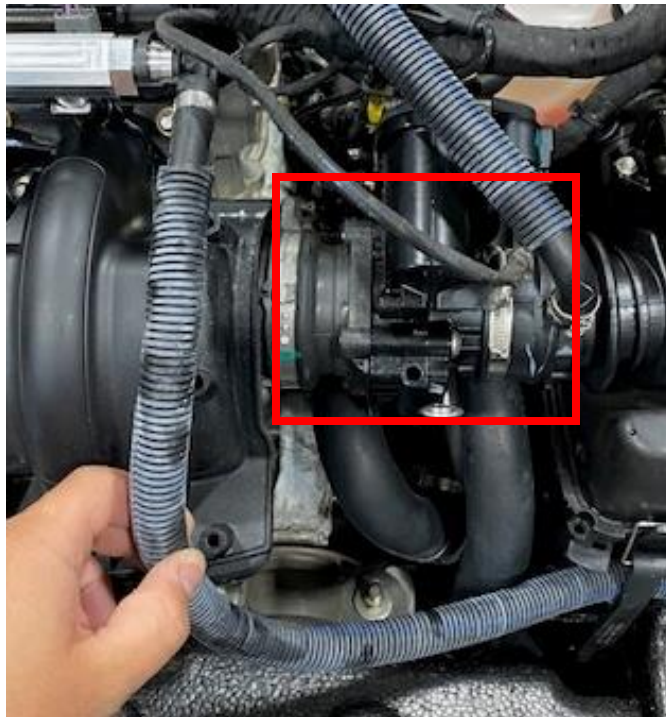


Figure 1

Step 3: Remove the pinch clamp from the throttle body boot to plenum. Discard.



Figure 2

Step 4: Pull the throttle body boot off the plenum. Located in the plenum is the flame arrestor.



Figure 3



Figure 4

Step 5: Remove the flame arrestor and seal.



Figure 5

Step 6: Install the ribbon delete into the plenum until it bottoms out. Reinstall the throttle body boot and supplied clamp.



Figure 6

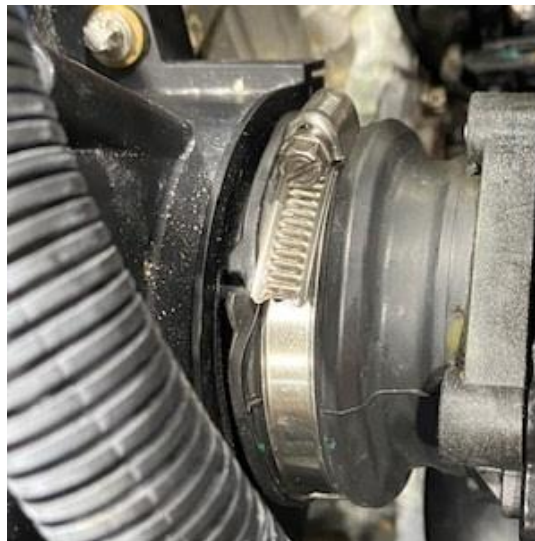


Figure 7

Step 7: Install (2) zip ties holding the fuel hose to the plenum.

Thank you for choosing Evolution Powersports products. If you require further assistance, please call our Tech Support @ (715) 247-3862

Note: This product is exempt from the emission standards and related requirements of 40 C.F.R. § 1051 as provided by 40 C.F.R. § 1051.620, and California law [e.g., vehicle code §§ 27156 and 38391]. This product is sold only for use in connection with EPA certified, purpose-built, nonroad vehicles used solely for closed course, nonroad competition/racing and not used for any recreational purpose or on public highways or right of ways maintained by and open to the public. This product is sold only in connection with machines that do not fall under state and/or federal noise or emission standards/regulations. Purchasers who/that purchase this product represent and warrant that the product is purchased only in connection with EPA -certified, emission-regulations-exempt and noise-regulations-exempt competition/racing vehicles as interpreted under applicable state and/or federal law. Questions: Call Evolution Powersports at (715) 247-3862.