



## **Pro R Paragon-54 330 Turbo Upgrade System**

**SKU(s):604FP0087**

**NOTE:** Expect 24–48-hour turnaround from the time we receive your ECU for unlock. Please send your ECU to EVP WI headquarters. Create your Maptuner/CodeShooter account before starting the project. Email us at [givememorepower@evopowersports.com](mailto:givememorepower@evopowersports.com)

This is a high-performance upgrade! Although we have gone through great lengths to build safety into the upgrade turbo system, the fact is installing any upgrade / turbo system requires care in both operation and installation. Poor fuel, improper setup or any number of things that are done incorrectly can damage your engine!

- You have likely voided the sound and exhaust emission standards of your country if applicable.
- This upgrade is intended for OFFROAD and RACING use only.
- This is a performance upgrade which will VOID your engine warranty especially if installed incorrectly or operated without regard to your instruments.
- The fuel requirements must be adhered to. Poor fuel can destroy an engine in seconds.
- Evolution Powersports bears no responsibility for damage caused to your vehicle by the installation of EVP products. The warranty on big turbo kits is 30 days from the date of purchase. Evolution Powersports, at its discretion will determine whether a part meets the warranty requirements. In no case is there any warranty from EVP for your vehicle or vehicles drivetrain. Although we have been careful to supply you with the highest quality parts possible, we assume no liability for damage to the vehicle or personal injury from installing or using any of our products.
- The installation of this kit is technical and mechanical in nature with many opportunities to make mistakes – mistakes that can be very costly. If you are not qualified to install this kit, bring your vehicle to one of our qualified installation centers to do the installation.
- This kit will make your vehicle faster, climb higher and accelerate more quickly and take a longer distance to brake than a stock tuned vehicle. If you are not capable of controlling the vehicle with the added performance, do not install the kit.
- High boost is hard on spark plugs – they must be changed frequently. If you experience misfire issues – Gap and replace the spark plugs.
- A full exhaust and clutching are required for this kit and can be purchased separately.
- Do not ever allow a child or an unqualified driver to operate this vehicle.



**Parts Included in Paragon 54-330 Turbo Upgrade System**

604FP0075	Pro R Paragon 54/68 Black Turbocharger Assembly
604FP0076	Pro R Paragon Installation Kit
100FP0187	Pro R P54-330 Triple Fan Intercooler Assembly
953RU0485	Pro R Triple Fan Intercooler Hardware Kit
100RP0154	Pro R Charge Tube Kit, Black
953RU0421	Pro R Turbocharger Charge Tube Hardware Kit
203FP0110	Pro R Turbocharger Air Intake Kit
804FP0259	Pro R OEM Coolant Tank Relocation Kit
803FU0011	Pro R Catch Can Kit
100FP0187	Pro R Blow Off Valve 2.0 (BOV) Kit
300FP0374	Pro R Turbocharger Header/Exhaust System
004FP0361	Pro R Turbo Bench Power Flash, CAN Unlock
502FU0018	1300cc Injector, ID1300-XDS Uskar, 34mm Length, 14mm top, 14mm lower, set of 4
603FP0004	Pro R External Wastegate, WG40 Gev V Compgate 40, 14psi
705RU0029	3 Bar MAP Sensor
702RC0014	Universal Intercooler Fan Wire Harness
702RC0023	Defender Intercooler-Fuel Pump Harness
702RP0016	RZR Air to Air Triple Fan Intercooler Harness
925FP0184	Pro R Exhaust Facia Trim Plate
102FP0007	Pro R Intercooler Mount
702RU0032	(4 Seat ONLY) Intercooler Extension Harness

Level	Tunes	Max Boost (psi)	Spark Plug Gap	Spring	Operating RPM	Engine HP
<b>P54-330</b>	91	6-7 psi	.016 - .018	Pink (7)	8200-8450	330CHP, 270WHP

**Required Parts (Sold Separately)**

- EVP calibrated Tapp primary clutch or EVP Shift-Tek Weights
- EVP calibrated STM secondary clutch or EVP Shift-Tek Spring
- AFR Module
- Oil Change Kit (Recommended)
- Engine Coolant
- Compressed air and parts cleaner
- P90X primary clutch puller

### **Pro R Disassembly**

**Step 1:** Remove the (4) bed screws using a T-40. Remove the bed.

**Step 2:** Remove the passenger and driver seat, if a 4-seater remove the rear seats.

**Step 3:** Remove both firewall panels, (6) 1/4-turn fasteners.

**Step 4:** Cut all zip-ties holding the taillight harness and rear-view camera. DO NOT remove the clips from the panels, this way you can reuse all OEM clips and supplied zip-ties in the hardware kit.



Figure 1

**Step 5:** Unplug both rear taillights and camera.

**Step 6:** Remove the lower rear valance around the muffler tips. Use a T-50 socket.



Figure 2

**Step 7:** Remove the upper rear valance with taillights. (4) T-40 screws and (6) push darts. (2) push darts are tucked underneath the rear fenders.

**Step 8:** Remove the cold air intake tube (bed to airbox tube) and intake tube (airbox to throttle body). Remove the crankcase breather tube from the intake tube. (4) worm drive clamps total.



Figure 3



Figure 4

**Step 9:** Remove the coolant tank cap and drain the tank. Remove the (2) 10mm screws holding the airbox in place. Two tabs will be located underneath the airbox.

**Step 10:** Remove (2) T-40 screws holding the coolant reservoir in place. Remove all hoses from the coolant reservoir.



**Step 11:** Remove the hardware (4) 13mm bolts and (1) 1/2" x 1/4" CVT boot support bracket.

Figure 6



Figure 7

**Step 12:** Remove (2) 14mm bolts holding the muffler and header pipe together. Remove the muffler by sliding it out of (3) rubber gromets (towards the left side of the vehicle). Gromets shown below.



**Step 13:** Remove the airbox and bed frame Figure 8 ties holding the engine harness to the bed frame.

**Step 14:** Remove the header heat shield. (4) 10mm screws.



Figure 9

**Step 15:** Remove (9) 6mm Allen screws holding the header to the engine block. Unplug the O2 sensor from the engine harness. Remove the header.

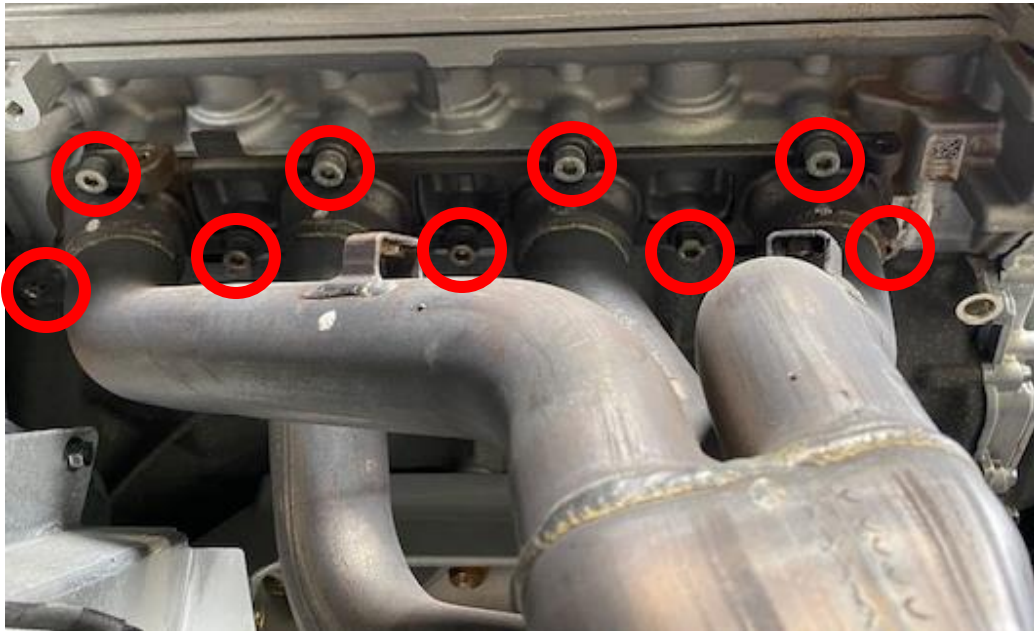


Figure 10

**Step 16:** Remove the alternator belt cover. (7) 10mm screws.

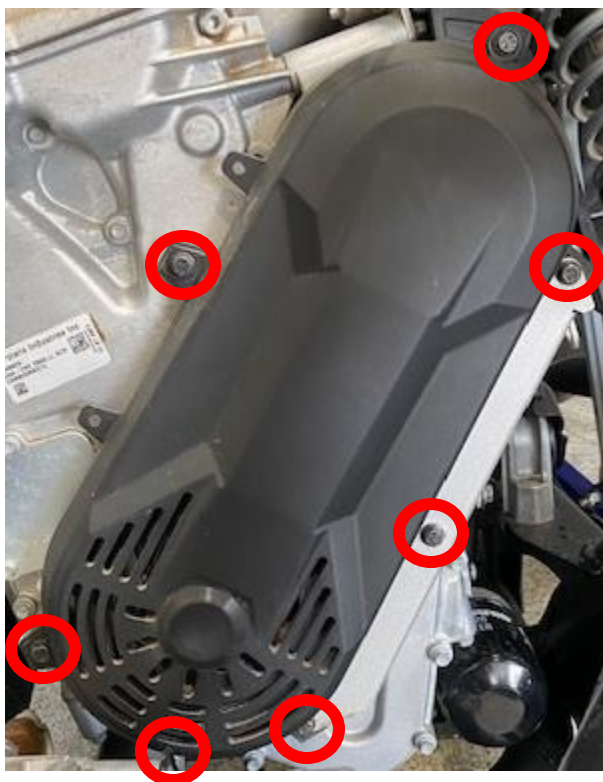


Figure 11

**Step 17:** Remove the CVT box breather. (1) worm drive clamp.



**Step 18:** Remove the chain tensioner according to Figure 12 from the timing chain cover, using an 8mm socket.



Figure 13



### ***Pro R Reassembly***

**Step 1:** Install supplied EVP chain tensioner cover. Torque the OEM hardware to **80 in-lbs.**  
Reinstall the alternator belt cover.



### ***Pro R Intercooler***

Figure 14

**Step 1:** Remove (6) T-40 screws on the back cargo area. See photo below.



Figure 15

**Step 2:** Install the intercooler cage onto the vehicle. Hand tighten a few T40 screws to hold it secure. With a silver sharpie, outline both circles onto the plastic. Remove the cage. With a 3.50" whole saw or Dremel with a carbide bit, cut out both holes. Use fine grit sandpaper and a heat gun to clean up the burs.

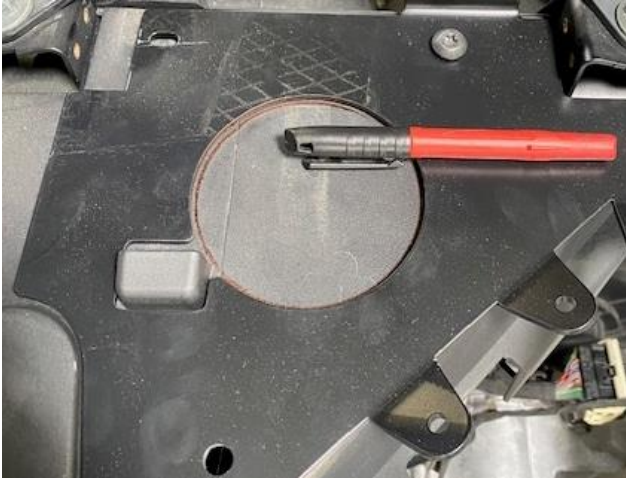


Figure 16



Figure 17

**Step 3:** Install the intercooler onto the mount. Use supplied M8-16mm flanged screws with spring washers. A total of (6). Make sure the fan harnesses go inside the mount. (photo taken on work bench).



Figure 18



Figure 19

**Step 4:** Install the intercooler and cage onto the vehicle. Use OEM hardware to secure the intercooler cage to the vehicle. Use (2) M8x35mm button head, (2) oversized washers and nyloc nuts to secure the rear of the intercooler cage.



Figure 20

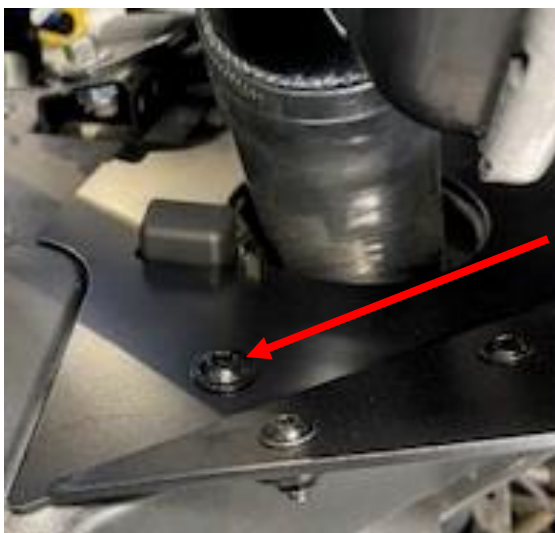


Figure 21

M8x35mm  
with  
oversized  
washers'  
underneath

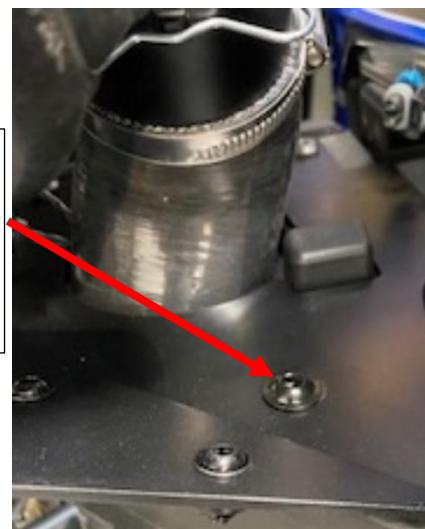


Figure 22

### Pro R Header


**Step 1:** Make sure all debris is off exhaust ports on the cylinder head, install supplied header gasket, header pipe, (9) M8x30mm screws with (9) conical washers. Torque to the sequence below.



Figure 23



Figure 24

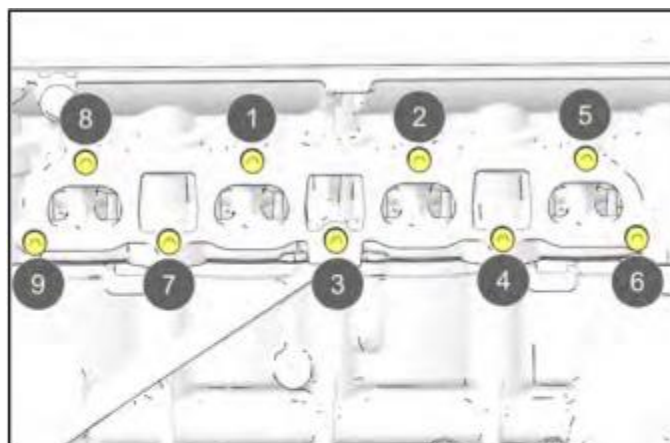

**NOTICE**

Exhaust manifold hidden for image clarity

**TORQUE**

Exhaust Manifold Fasteners:  
**Step 1: 60 in-lbs (7 Nm) Step 2: 22 ft-lbs (30 Nm)**

Figure 25

**Step 2:** Install the 41mm OD stainless steel sleeve into the intake cylinder on the wastegate. Install onto the header with a 204221 clamp. Apply anti seize on threads of the clamp. Keep clamp loose for now.



Figure 26



Figure 27

**Step 3:** Install turbocharger to the header using a 215221 clamp. Apply anti seize on threads of the clamp. Keep clamp loose for now.



Figure 28



Figure 29

**Step 4:** Install the mid-pipe to the turbocharger and wastegate dump. Apply anti seize on the threads. Leave clamps loose for now. Wastegate dump to mid-pipe will use clamp 105212. The turbocharger to mid-pipe will use clamp XXXXX.



Figure 30

**Step 5:** Leave the mid-pipe hanging for now, you will connect the muffler later when the bed frame gets reinstalled.

**Step 6:** Install the 21" hose line from the bottom port on the wastegate to the turbocharger fitting.



Figure 31



Figure 32



## Turbocharger Oil Lines

**Step 1:** Locate the oil filter, remove the 5mm plug out of the oil filter housing.



Figure 33

**Step 2:** Locate the 60" oil feed line. Install supplied fire sleeve onto the oil feed line. Install supplied banjo bolt and washers on the straight fitting. Install it onto the oil filter housing. DO NOT OVER-TIGHTEN.



Figure 34



Figure 35

**Step 3:** Route the 90-degree fitting to the oil feed on the turbocharger.



Figure 36

**Step 4:** See oil feed line routing below, use supplied 5/16" & 1/2" P-clamps to hold the oil line around the timing chain cover.



Figure 37



Figure 38

**Step 5:** Locate the oil drain hose with (2) 90-Degree fittings. Install fire sleeve onto the oil drain hose. Install one end to the oil drain plate located where the timing chain access panel is.



Figure 39

**Step 6:** Install the other 90-degree fitting to the oil drain located on the turbocharger.

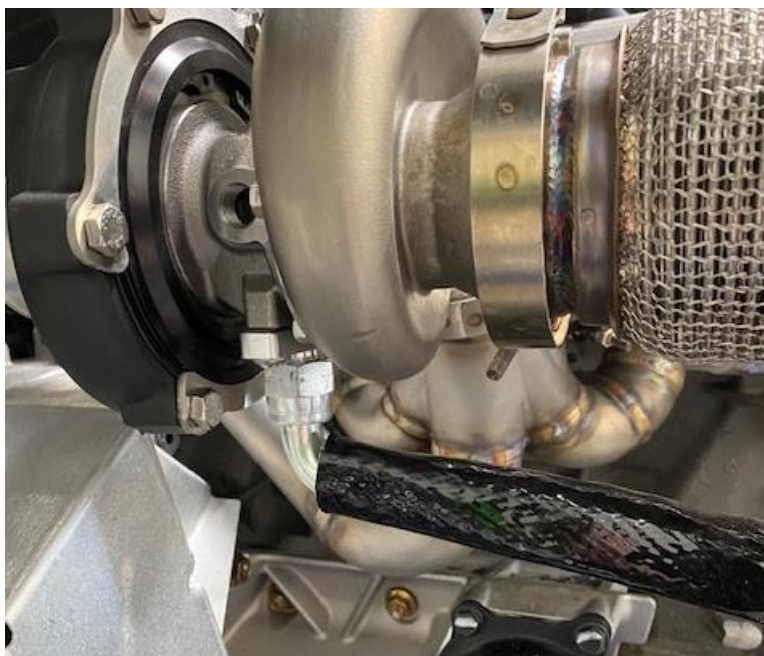


Figure 40

## Pro R Charge Tube

**Step 1:** Locate the airbox to turbocharger charge tube. Install the 1/2" plug into the crankcase vent port. Fasten with a 24.1mm pinch clamp. (Figure 41). Turbocharger to intercooler charge tube will need a BOV plug installed with a 34.6mm pinch clamp. (Figure 42)



Figure 41



Figure 42

**Step 2:** Install the O-rings into the billet charge tube connectors. Apply dielectric grease to the O-rings. The O-rings are directional, install as shown below.



Figure 43



Figure 44

**Step 3:** Locate the intercooler to throttle body charge tube. The blow off valve will be mounted in the port shown below.



Figure 45

**Step 4:** Install the turbocharger to intercooler charge tube. Once you have fit the silicone through the plastic, install the billet connector. Use dielectric grease if needed. Fasten down with a 60-80mm worm drive clamp. Fastened the turbocharger side with a 50-70mm worm drive.



Figure 46

**Step 5:** Install the throttle body to intercooler charge tube. Once you have fit the silicone through the plastic, install the billet connector. Use dielectric grease if needed. Fastened down with a 60-80mm worm drive. Fastened down the throttle body side with a 70-90mm worm drive.



Figure 47



Figure 48

**Step 6:** Install the billet connectors to the intercooler. Use (3) cotter pins per each side.



Figure 49



Figure 50

## Injector/MAP Sensor Installation

**Step 1: NOTE:** clean intake plenum with compressed air, especially around the injector ports. Remove (4) injector connectors, cut the zip-ties holding the injector harness to the intake plenum and remove from the fuel rail. Remove the blue clip and fuel hose connector from the fuel rail.

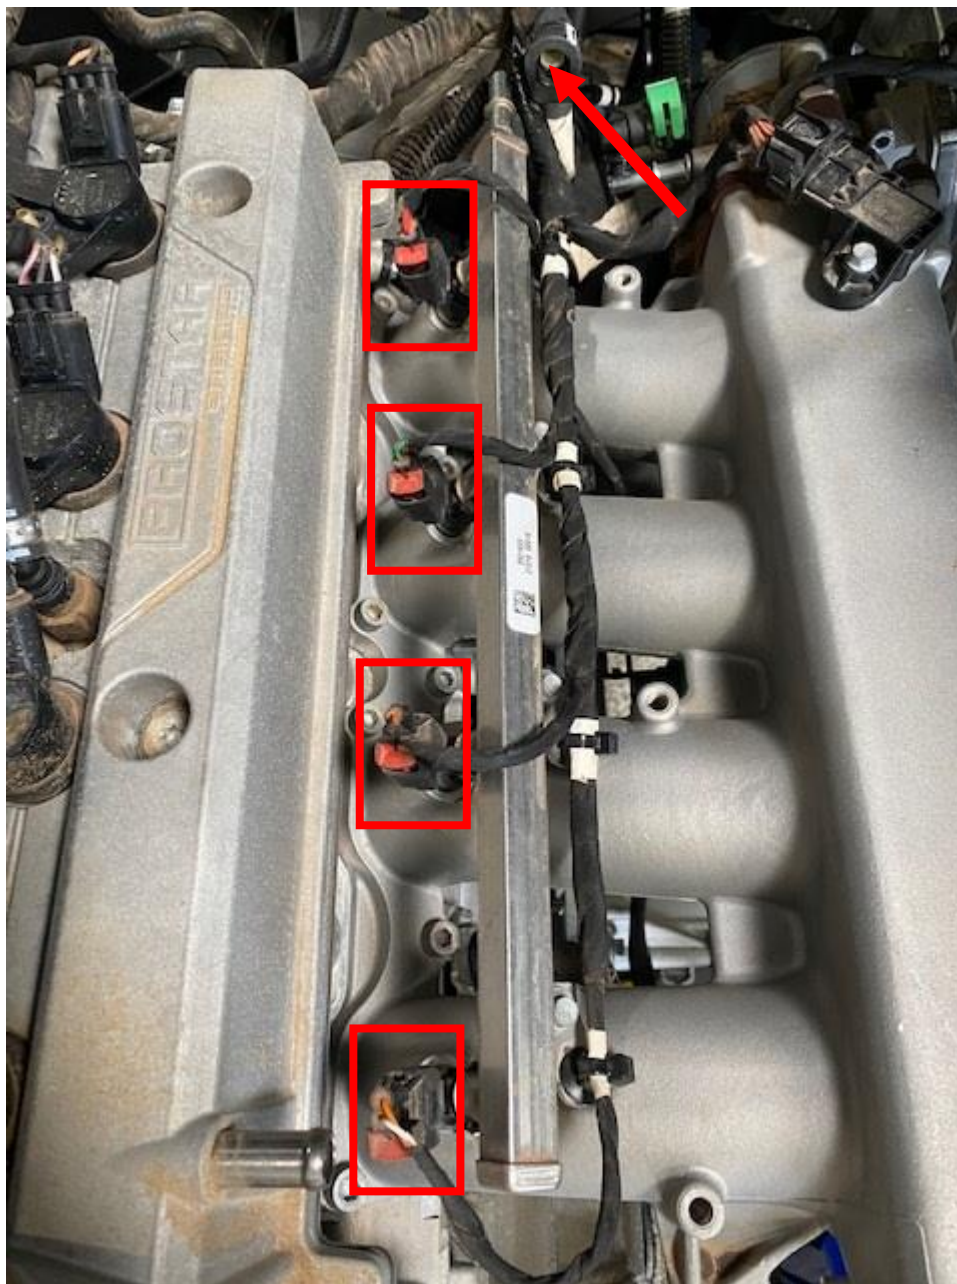


Figure 51



**Step 2:** Remove the (4) 8mm screws holding the fuel rail to the plenum. Remove the fuel rail.

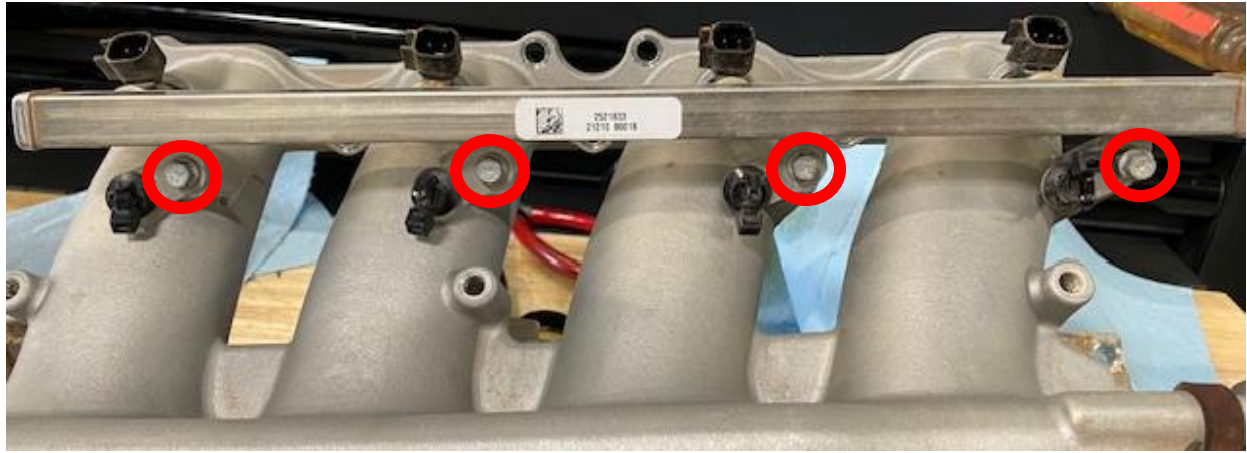


Figure 52

**Step 3:** Remove the injector clips, remove the injectors. Blow out the fuel rail with all injectors removed.



Injector "C" clip.

Figure 53

**Step 4:** Install the supplied (4) injectors. Apply dielectric grease to the O-ring on the injector. Reinstall the injector clip. Make sure the injector is properly seated. Torque fuel rail to 7 ft-lbs.

**Step 5:** Remove the MAP sensor plug. Do NOT use a screwdriver. Remove OEM MAP sensor using a 8mm socket. Install the supplied MAP sensor, apply dielectric grease on the O-ring before installing.



Figure 54

**Step 6:** Remove the brass barb fitting on the bottom side of the intake plenum. Install the supplied M12 x 1/4" barb fitting.



Figure 55

**Step 7:** Reinstall the fuel line to the fuel rail (blue clip). Reinstall the OEM harness and injector connectors.

**Step 8:** Install new zip-ties onto the plenum to hold the factory harness.



Figure 56

**Step 9:** Re-gap the OEM (NGK-ZMR7A-10) spark plugs to 0.018". Install the spark plugs back into the cylinder head. **Torque to 9 ft-lbs.**

**Step 10:** Reinstall ignition coils and **torque to 80 in-lbs.** Reconnect all (4) ignition coils to the harness.

### **Pro R Airbox (Pre 10-24-2023)**

**Step 1:** Locate the air filter adaptor template. Install it onto the outside of the airbox. Once aligned properly mark the (4) holes with a silver sharpie.

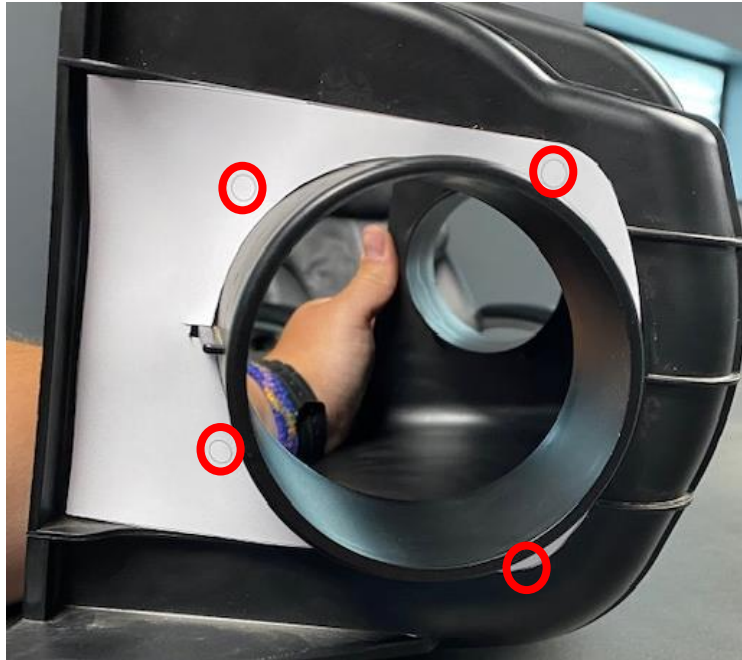


Figure 57

**Step 2:** Use a 1/4" drill bit and drill out (4) holes. Fasten the bracket down with supplied (4) M6x16mm flanged head screws into the Nutzerts.



Figure 58/59

**Step 3:** Reinstall the airbox (loosely) into the vehicle.

**Step 4:** Reinstall the bed frame with OEM hardware.

**Step 5:** Reinstall airbox hardware and engine harness clips. Use supplied zip-ties.

**Step 6:** Install supplied air filter and pre filter into the airbox.

### **Pro R Airbox (Post 10-24-2023)**

**Step 1:** Locate firewall and bed frame brackets along with (4) M6x16mm flange bolts, (2) Nylock nuts and (2) M6 Nutzert.



Figure 57B

**Step 2:** Locate the firewall side of the bed frame, you will find (4) holes total (2) per frame rail. Install a M6x1.0 Nutzert into the bottom hole. On the bottom of bed frame.



Figure 58B

**Step 3:** Install (2) M6x16mm flanged screws holding the bed frame air box relocation bracket to the bottom of the bed frame. See photo.



Figure 59B

**Step 4:** Install the bed frame loosely, flip the airbox 180 degrees (making sure the airbox still opens inside the cab). Install the firewall air box relocation bracket using OEM hardware.

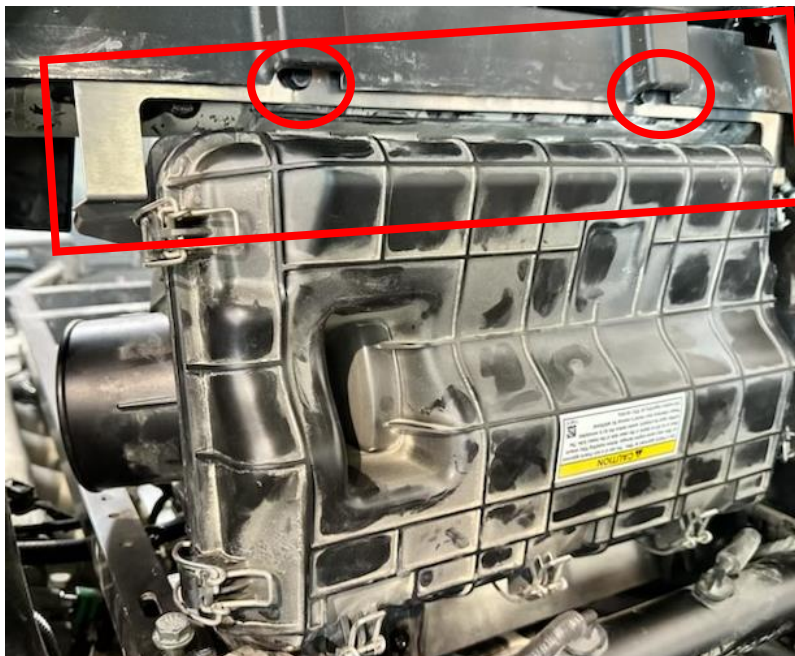


Figure 60B

**Step 5:** Install (2) M6x16mm screws and (2) M6 Nylock nuts holding the bottom of the airbox to the bed frame air box relocation bracket.

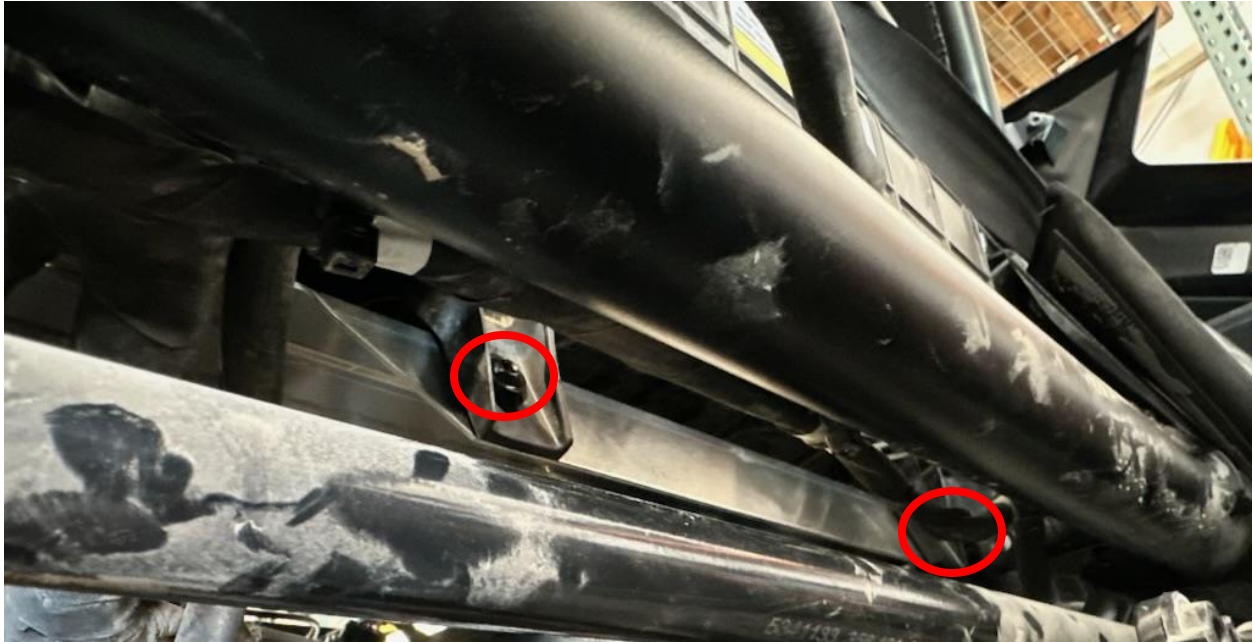


Figure 61B

**Step 6:** Reinstall the bed frame with OEM hardware.

**Step 7:** Reinstall airbox hardware and engine harness clips. Use supplied zip-ties.

**Step 8:** Install supplied air filter and pre filter into the airbox.

## Pro R Catch Can

**Step 1:** Install the catch can on the left-rear frame. Tighten down the clamp around the tube frame. The port on the cap will face the engine bay. Install the 1/4" rubber hose to the barb located on the bottom of the catch can. Run it down into the belly pan.



Figure 60



Figure 61



**Step 2:** Locate the engine breather hose going to the plenum (which is currently removed). Remove the hose from the engine. Remove the longer piece of hose. Keep the small piece with the connector and one-way-ball valve. Reconnect the small piece to the engine.



Figure 62



Figure 63

**Step 3:** Install the catch can hose. The “Y” portion of the hose will go to the small connector on the engine and the valve cover.



Figure 64



Figure 65



Figure 66

### ***Pro R Blow Off Valve (BOV)***

**Step 1:** Install the pre-filter onto the BOV and use supplied zip-tie around the base of the BOV to hold the prefilter on.

**Step 2:** Install the BOV into the charge tube between the intercooler and throttle body. Use supplied 25-40mm worm drive to fasten down.



Figure 67

**Step 3:** Install the vacuum line to the BOV and plenum barb, that was installed earlier. Use pinch clamps to secure.



Figure 64

**Step 4:** Install the V-flow from the turbocharger to airbox. Use supplied 70-90mm and 90-110 worm drive clamps.



Figure 68

## **Pro R Coolant Tank/ECU Removal**

**Step 1:** Located behind the passenger seat (if a 4 seater the rear passenger seat), remove the (4) push darts holding the sound dampener in.

**Step 2:** Located behind is the ECU. Remove the black clip. Remove the (4) T15 screws holding the ECU in place. Unclip the ECU connectors, left before the right.



Figure 69



Figure 70

**Step 3:** Remove the bed to CVT ducting, (2) worm drive clamps.

**Step 4:** Freely hold up the coolant reservoir bracket, keeping the EVP logo in line with the push dart hole and using the OEM existing hole for the bottom right Nutsert. (Figure 71-72).

**Step 5:** Angle the bracket so you cannot see the 90-degree bend on the plastic. Figure 73 wrong, Figure 74 correct.

**Step 6:** Mark the (3) holes out with a sharpie. Cut the holes out with a 1/4" drill bit. Install the mounting hardware on the bracket side.



Figure 71



Figure 72



Figure 73



Figure 74

**Step 7:** Mount the coolant tank. Make sure to mount the coolant tank inside the lower cutout.



**Step 8:** Cut the pinch clamp holding the valve cover water fitting on, remove the OEM hose from the valve cover fitting. Install the supplied 18" of 5/16" hose to the valve cover fitting. Use 15.7mm pinch clamp to secure.



Figure 73

**Step 9:** Install the OEM valve cover hose to the TOP barb on the coolant tank. Install the 8" piece of 5/16" hose on the BOTTOM barb for the radiator overflow. Install a 5/16 adapter to the end of the 8" piece of hose. Use 15.7mm pinch clamps.

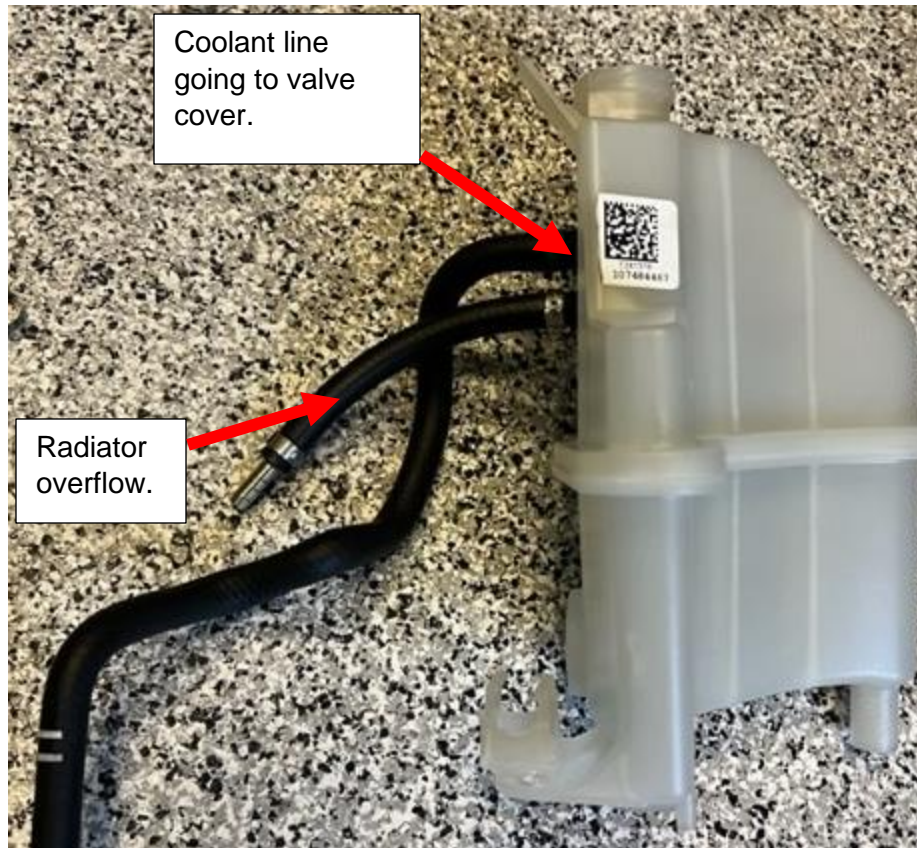


Figure 74

**Step 10:** On the valve cover water hose, the part that was connected to the fitting, cut 1.0" or the 45-degree bend off.

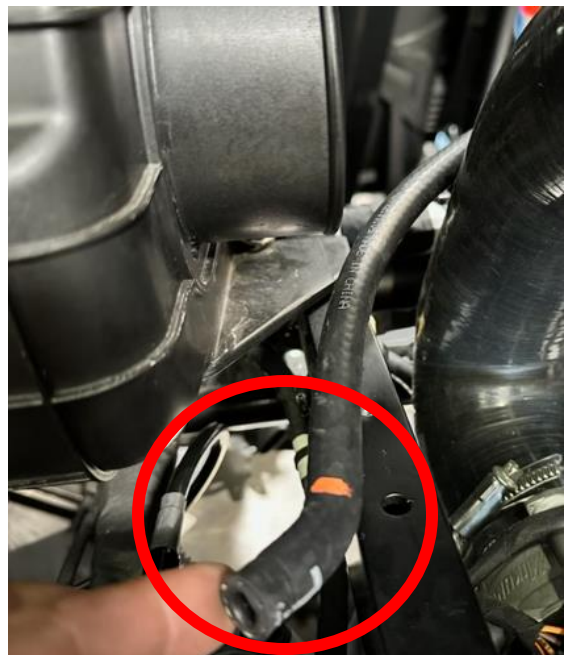


Figure 75

**Step 11:** Insert a 5/16" adaptor into the valve cover hose and connect it to the 18" of hose coming from the valve cover. Use 15.7mm pinch clamps.



Figure 76



Figure 77

**Step 12:** Install the supplied hose from the large barb on the coolant tank to the thermostat block. Reuse (2) self-tightening OEM clamps.



Figure 78



Figure 79



## Pro R Triple Fan Intercooler Harness

**Step 1:** Intercooler wire harness below.

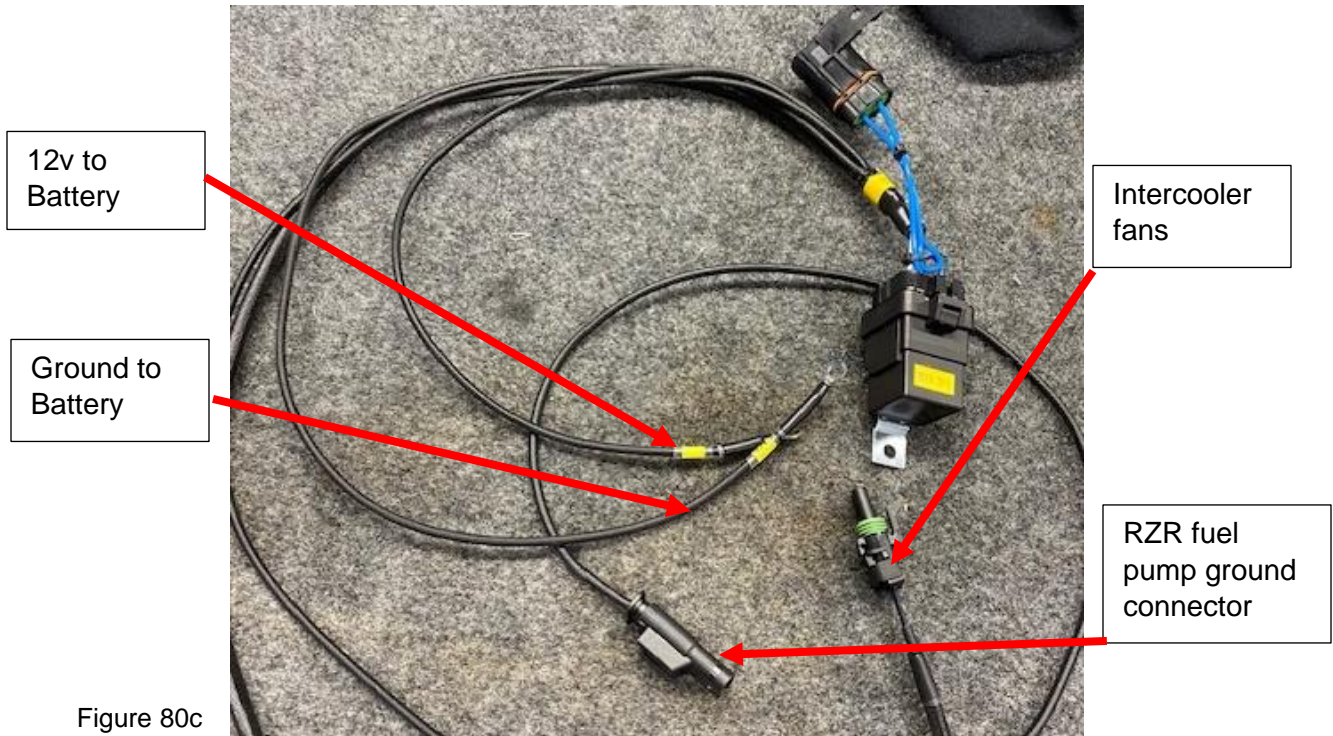


Figure 80c

**Step 2:** Locate the battery underneath the driver's seat. Connect the relay harness to the correct battery post.



Figure 81

**Step 3:** Route the (2) wires from the relay harness to the rear of the car. One is the ground for the fuel pump “Y-harness” and one is for the intercooler fans. **NOTE:** 4 seaters will need to use the extension harness between the relay and triple fan intercooler. Run the harness next to the CVT duct work.



Figure 82-83

**Step 4:** Below is the fuel pump “Y Harness”. Plug one end into the OEM harness and the other end to the fuel pump. Plug the single connector to the intercooler relay harness.



Figure 84

**Step 5:** Run the fan harness pigtail behind the passenger seat, zip tie it to the frame rail. Plug in the triple fan harness and route it up to the intercooler. Plug in the fans.



Figure 85



Figure 86

## ***Pro R Turbocharger Exhaust***

**Step 1:** Remove the lower exhaust isolator from the frame. Use a 13mm socket.



Figure 87

**Step 2:** Install the exhaust clamp onto the muffler pipe. Install the muffler to the vehicle, re-use both top isolators. Install the bottom isolator onto the muffler and frame. Reinstall hardware.



Figure 88

**Step 3:** Remove the O2 sensor out of the OEM header using a 7/8" or 19mm wrench. Use anti seize on the threads and install onto the new down pipe. Reconnect the electrical connector to the harness.



Figure 89

**Step 4:** Tighten all clamps on the turbocharger, wastegate, mid-pipe, muffler, and muffler tips. Use anti seize on all threads. DO NOT overtighten the V-band clamps.

### ***Polaris Pro R Rear Facia***

**Step 1:** Open the new Pro R rear Facia box. Place the raw aluminum backer plate onto the rear facia trim. Use the M4 hardware and install. Keep the head of the screws on the outside.



Figure 90

**Step 2:** With a T50 socket remove the (2) screws holding the rear fascia to the frame. Keep the plastic step washers.



Figure 91

**Step 3:** Place the EVP fascia trim piece onto the vehicle. Reuse the OEM plastic step washer and bolt. Start securing but leave somewhat loose.



Figure 92

**Step 4:** Install the remaining hardware through the OEM plastic tabs. Place a washer on the head and nut side. Fasten down. Also finish fastening the T50 screws.



Figure 93

## Pro R Turbocharger Clutching

**Step 1:** Remove the (5) CVT cover bolts using a 10mm socket. Loosen the 1/4 twist latches around the CVT cover. Remove the cover.

**Step 2:** Remove the belt.

**Step 3:** Remove the primary bolt using a breaker bar and T60 socket.

**Step 4:** Use a P90X primary clutch puller to remove the primary clutch from the crankshaft.

**Step 5:** Remove the secondary bolt using a 13mm socket.

**Step 6:** Using a clutch compression tool, loosen (3) helix bolts using a 13mm socket.

**Step 7:** Remove the OEM secondary spring and install supplied orange/blue spring. Put the secondary clutch back together.

**Step 8:** Reinstall the secondary clutch and torque the bolt to **55 ft-lbs.**

**Step 9:** Install the TAPP primary clutch. Install supplied spacer on the OEM bolt and torque to **90 ft-lbs.**

**Step 10:** Reinstall the CVT belt in the correct orientation.

**Step 11:** Spin the secondary a total of 5 rotations to set belt deflection.

**Step 12:** Reinstall the CVT cover and hardware.

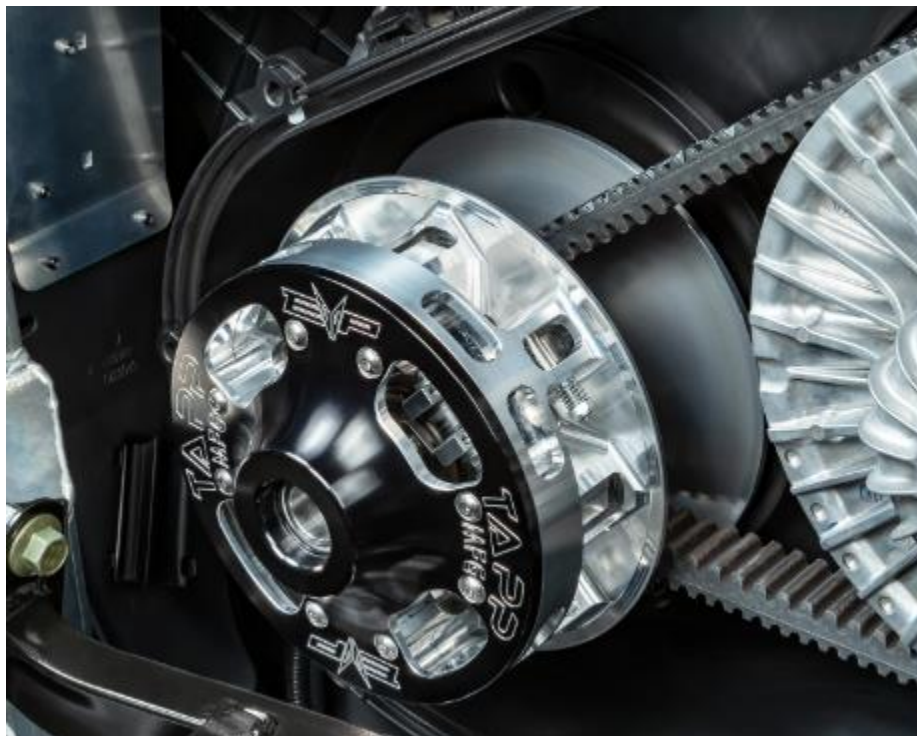


Figure 91





## **Finishing Up**

**Step 1:** Change engine oil and oil filter.

**Step 2:** Add coolant to the reservoir.

**Step 3:** Drain the fuel tank and add correct fuel for your tune.

**Step 4:** Reinstall your ECU.

**Step 5:** Start the vehicle and let it idle for a few minutes, keep an eye on the coolant level. Add if necessary. Look for any leaking. Once the coolant level is correct, shut the vehicle off.

**Step 6:** Reinstall all body panels, bed, skid plate, interior, etc.

*Thank you for choosing Evolution Powersports products. If you require further assistance, please call our Tech Support @ (715) 247-3862*

***Note:** This product is exempt from the emission standards and related requirements of 40 C.F.R. § 1051 as provided by 40 C.F.R. § 1051.620, and California law [e.g., vehicle code §§ 27156 and 38391]. This product is sold only for use in connection with EPA certified, purpose-built, nonroad vehicles used solely for closed course, nonroad competition/racing and not used for any recreational purpose or on public highways or right of ways maintained by and open to the public. This product is sold only in connection with machines that do not fall under state and/or federal noise or emission standards/regulations. Purchasers who/that purchase this product represent and warrant that the product is purchased only in connection with EPA -certified, emission-regulations-exempt and noise-regulations-exempt competition/racing vehicles as interpreted under applicable state and/or federal law. Questions: Call Evolution Powersports at (715) 247-3862.*