


Straight Female

REVISIONS							
SYM	DESCRIPTION	DATE	APPROVED	SYM	DESCRIPTION	DATE	APPROVED
△				△			
△				△			

**CUSTOMER DRAWING FOR REFERENCE ONLY, SAMPLES APPROVAL ARE REQUIRED!!

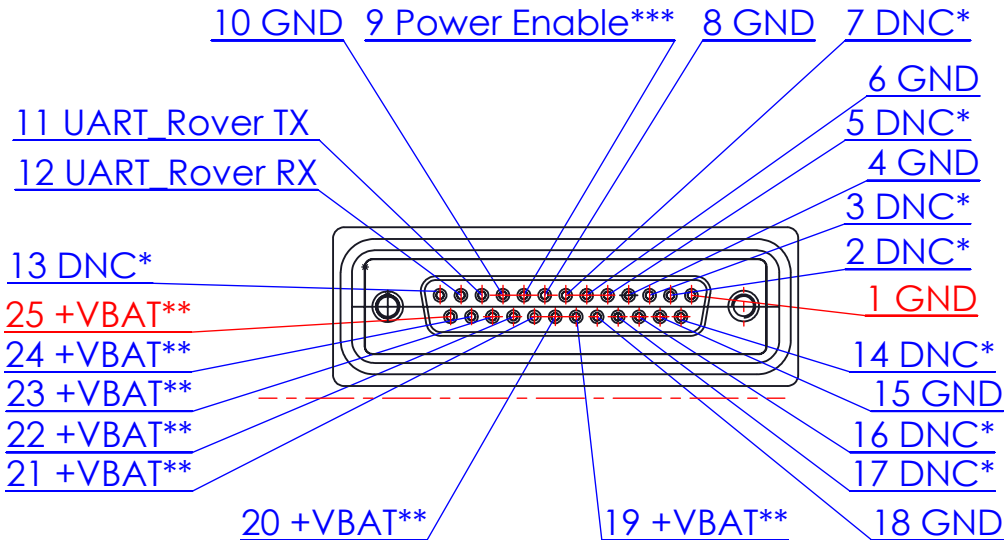

Mating Side

Contact Current Rating: 3A Max
 *The pins marked as DNC are not currently used by Open Rover Robots.
 **VBAT ranges from 12V to 16.8V depending on battery charge
 ***Power Enable must be pulled to ground to enable VBAT pins

TOLERANCES UNLESS OTHERWISE SPECIFIED			SIGNATURES		DATE	MODEL
			DRAWN			TITLE
			CHECKED			NO.
SYMBOL			UNIT	SCALE	APPROVALS	
△			mm			
Rover Robotics, Inc.						