
ALL-IN-ONE WIRELESS O INDOOR & OUTDOOR SPEAKER





ACTIVE SURFACE MOUNT SPEAKER

The iO1 speaker can be used indoors and outdoors with 6 different orientations. Connect to the speakers wirelessly or via a data cable. With a powerful amplifier and connectivity all built in, this active surface mount speaker delivers audio quality and installation convenience.

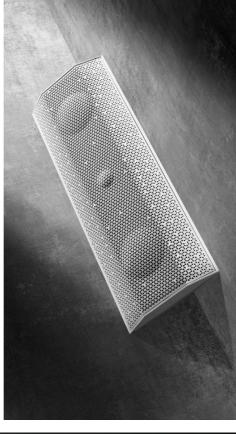




























ALL-IN-ONE SYSTEM. JUST ADD POWER.

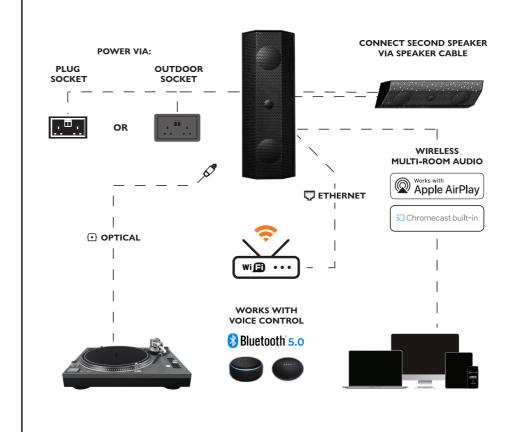


ONE SPEAKER. SIX WAYS.

ON WALL











Ground Spike and Pendant mounting kit sold separately.

Features

Place Anywhere Mount 6 different ways to suit your install requirement

Amplifier and Wi-Fi all built-in, just add power

Easy Connection

Connect to plug socket or existing light circuit or any power source available 230V or 110V supply

Built-in AirPlay 2 and Google Chromecast

Stream music directly from your Smart Phone / Tablet using Bluetooth or control multiple rooms at the same time

Multi-room Audio

Connect multiple iO1's and Lithe Audio Ceiling Speakers for a whole home, indoor and outdoor audio experiance

Outdoor Rated to Impressive IP66

Weather Resistant IP66 rated protection is extremely waterproof, impenetrable by weather, high pressure jets of water and even a non-sustained total soaking

Dynamic Sound

Fully Adjustable EQ via Lithe App to deliver fine tuned optimal sound

Choice of Connectivity

Wireless and Wired Connections to use with any streaming service or cabled equipment

Accessories available

06851 Power Extension Lead 5m

06850 16AWG Speaker Cable 7m

06840 IO1 Garden Spike Black (single)

06841 IO1 Garden Spike White (single)

06852 IO1 Eyelet kit (Single)

Speaker Spec

Dimensions: (H X W X D) 465 X 170 X 100mm

Power Input Supply: 100 - 240V, 50/60Hz / 2.5A

Colour: Black Matt and White

Woofer: 2 x 3" Waterproof (IP66) Coated Paper Cone

Tweeter: 0.75" Waterproof (IP66) Coated Silk Dome

Aluminium Front Grille

16 AWG Tin Coated Copper Cable

2 Year Warranty

Audio Spec

RMS Power: 100W RMS (2x 50W)

Frequency Response 55Hz - 50KHz (+/- 3dB)

Impedance: 4 Ohms nominal (8 8)

Sound Quality THD+N 0.009%, 20Hz - 22kHz (+/- 3dB)

Sensitivity (1W/1m): 82dB

Line In Analog (Optical), auto-detecting

Type: Class D (Digital)

Audio Compression: 192kHz / 24 bits

What's in the box

101 Surface Mount Speaker

Power Supply

Mounting Bracket

Instruction Manual

Connectivity

Wi-Fi certified 2.4Ghz / 5Ghz (802.11a/b/g/n/ac) (if using outdoor we reccomend to use an outdoor access point

10/100 Ethernet Ports (In/Out) (For hardwire connection)

Apple AirPlay 2 and Google Chromecast built-in certified

Spotify HiFi certified

Bluetooth 5.0

Optical

Works with OK Google

Drivers for smart home systems

Passive speaker output

WiFi (Internet Radio)

(Connectivity to speaker: Compression Gasket with Clamping Bracket)

SKU Codes

06800 IO1 WiFi Speaker (Single) - Black

06801 IO1 WiFi Speaker (Single) - White

06810 IO1 WiFi Speaker (Pair) - Black

06811 IO1 WiFi Speaker (Pair) - White

06820 IO1 Passive Speaker (Single) - Black

06821 IO1 Passive Speaker (Pair) - Black

06830 IO1 Passive Speaker (Single) - White

06831 IO1 Passive Speaker (Pair) - White

litheaudio.com