



Portable System with Stand, 8.0 kw, 6 APR

Sales@mavenimaging.com

Call 1-800-949-8015

Portable System with Stand, 8.0kW, 6 APR

- 8.0 kW, 100 mA, 125 kVp (see power requirements below)
- High Frequency Ripple: 300 kHz
- 40 to 125 kVp in 1 kVp steps
- Overlay Console allows customization of 6 APR region (20 editable positions); 6 regions optional
- 14 mA stations: 5, 6.4, 8, 10, 12.5, 16, 20, 25, 32, 40, 50, 64, 80 and 100
- 0.001-10 second exposure time range, 41 total in 25% steps
- 0.1 to 250 mAs, 34 total in 25% steps
- 0.6mm x 1.5mm dual focus stationary anode tube, 40,000 HU
- Power Cord, 19.7' long (6 meters)
- Exposure Cord, 9.8' long (3 meters)
- Collimator, certified manual
- Stand on base with wheels for easy maneuverability
- Gas spring arm supports tube to accommodate easy positioning
- Positive mechanical brakes
- Cassette storage box accommodates up to 8 cassettes
- Vertical tube travel, 62" (16.7"-78.7")
- 102.5 lbs total weight








Lower and Rise the Arm/ Neck in position

Trigger Switch



Trigger Switch

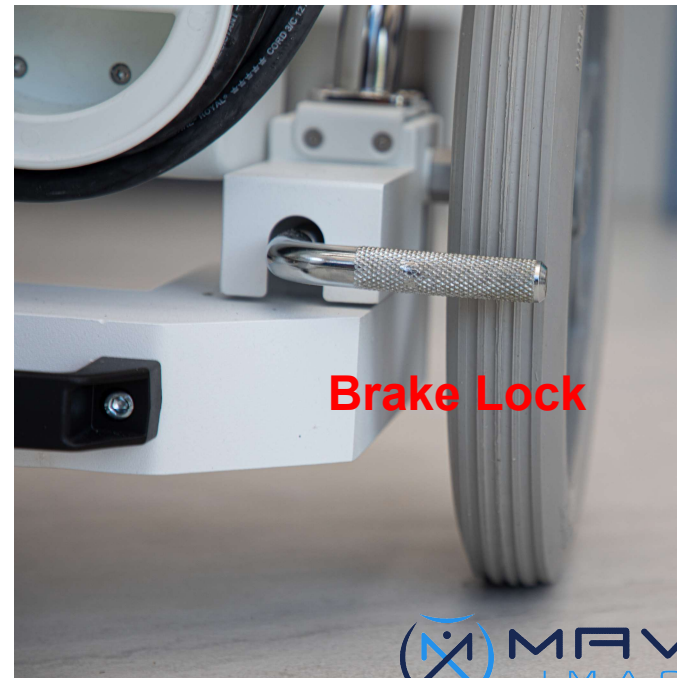



Patient Image

 **MAVEN**
IMAGING



Patient Image





**Power
Button**

**Charging
Connector**



Mobile Cassette Holder

