


SPECIFICATIONS


Replacement thermostatic cartridge: 18.30.147 Reverse thermostatic cartridge: 18.30.161

Flow rate: 14.28 GPM at 56 PSI top exit & 11.10 GPM bottom exit

Note: Separate shut-offs required to operate system

3/4" Thermostatic Valve with Integral Stops

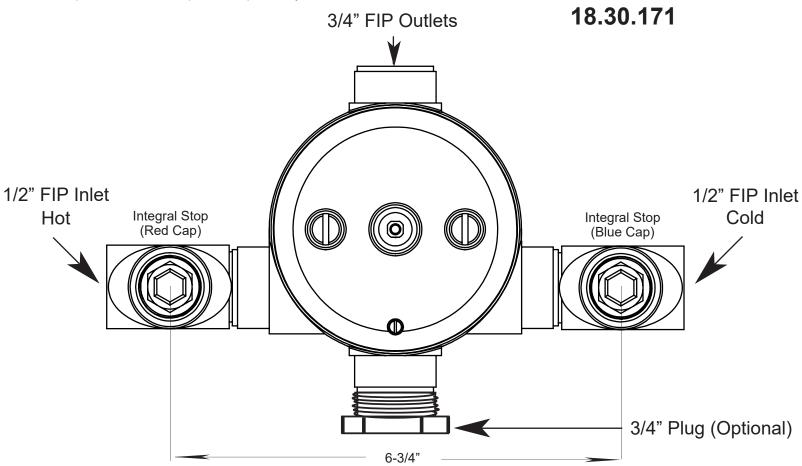

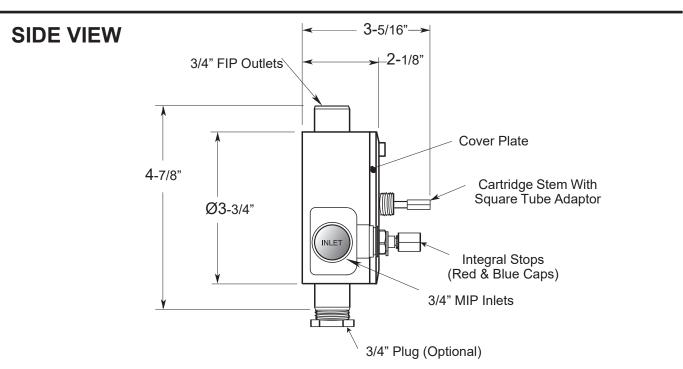

Note: Measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.