

# Hall-Effect Speed Sensor HA-N

www.bosch-motorsport.com



**BOSCH**  
Invented for life



- ▶ Camshaft/crankshaft/wheel speed
- ▶ Max. frequency 4.2 kHz
- ▶ Lightweight anodized aluminum housing

This sensor is designed for incremental measurement of rotational speed (e.g. camshaft, crankshaft or wheel speed). Due to the rotation of a ferromagnetic target wheel in front of the HA-N, the magnetic field is modulated at the place of the Hall probe. A Hall-effect sensor element with integrated signal conditioning circuit detects this change and generates a digital output signal.

The HA-N combines a robust sensing element with a lightweight aluminum housing that is well suited for motorsport use. The sensor element used was specifically selected for its resistance to demagnetization at high temperatures and is programmed for an active low output. This sensor element is approved for NASCAR competition as a camshaft speed sensor.

## Application

Application	Rotational speed
Max. frequency	≤ 4.2 kHz
Target wheel air gap AG	0.5 to 1.5 mm
Temperature range	-40 to 160°C
Output circuit	Open collector for 1 kOhm
Output type	Active low

External magnetic fields	< 1 mT
Max. vibration	1,200 m/s <sup>2</sup> at 10 Hz to 2 kHz

## Technical Specifications

### Mechanical Data

Weight w/ wire	13 g w/ 254 mm cable length and AS connector 28.5 g w/ 1,000 mm cable length flying lead
Bore diameter	10 mm
Installation depth L2	14 mm
Tightening torque	6 Nm

### Electrical Data

Power supply	5 to 18 V
Current I <sub>S</sub>	5.6 to 18 mA

### Characteristic

Accuracy repeatability of the falling edge tooth	< 4 % (≤ 4.2 kHz)
Signal output	0.52 V to V <sub>S</sub>

**Environment**

Target wheel diameter D	162.34 mm
Thickness t	12.5 mm
Width of teeth b1	3.8 mm
Width of gap b2	4.7 mm
Width of sync. gap b3	20.79 mm
Depth of teeth h	3.4 mm
Number of teeth	60-2

**Connectors and Wires**

Sensor AS connector	
Connector	ASL 6-06-05PA-HE
Mating connector	ASL 0-06-05SA-HE
Pin 1	V <sub>s</sub>
Pin 2	GND
Pin 3	Signal
Pin 4	Not used
Pin 5	Not used
Shrink sleeve	DR-25
Wire size	AWG 24
Wire length L	254 mm
Sensor Flying lead	
WHT/ORG	V <sub>s</sub>
WHT/BLU	GND

Sensor Flying lead	
WHT	Signal
Shrink sleeve	DR-25
Wire size	AWG 24
Wire length L	1,000 mm

**Installation Notes**

The HA-N can be directly connected to most control units and data logging systems.

If a trigger wheel with different dimensions is used (see environment), the technical function must be tested.

**Safety Note**



The sensor is not intended to be used for safety related applications without appropriate measures for signal validation in the application system.

**Ordering Information**


**Hall-Effect Speed Sensor HA-N**  
 Sensor AS connector  
 Order number **F 02U V0U 714-01**

**Hall-Effect Speed Sensor HA-N**  
 Sensor Flying lead  
 Order number **F 02U V0U 714-90**


Dimensions

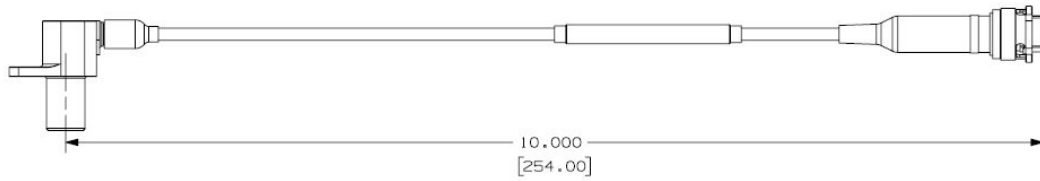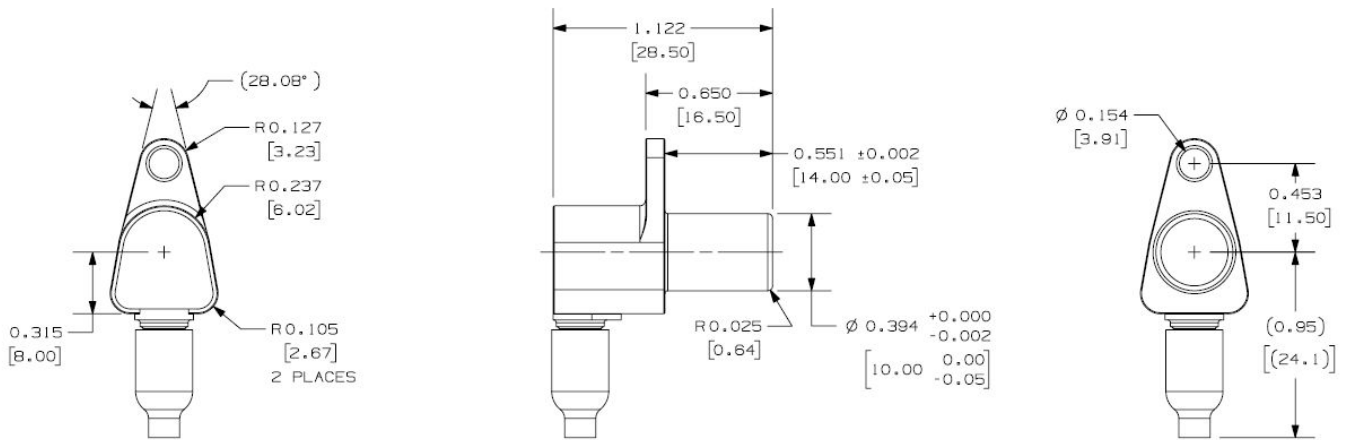


Sensor AS connector

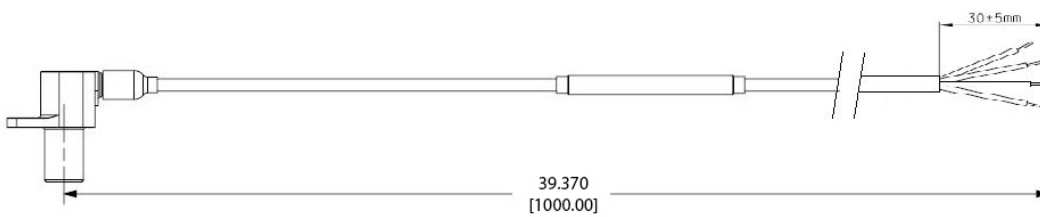

Sensor Flying lead

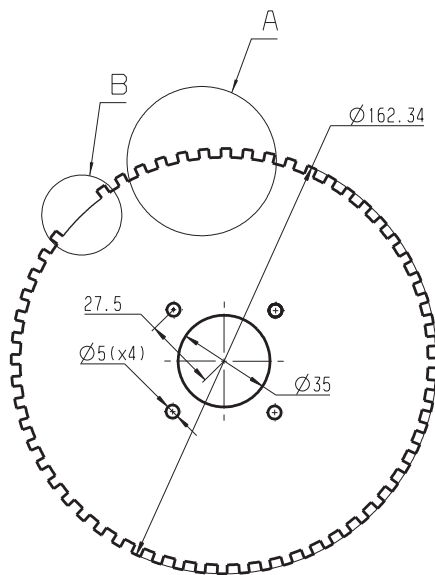

60-2 Teeth

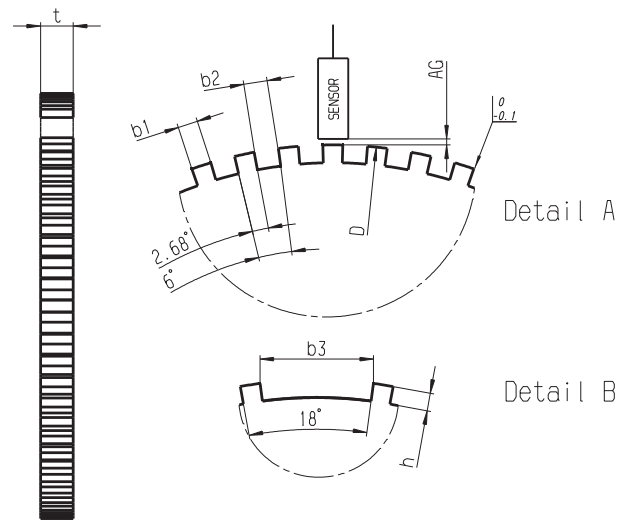

Left view

**Represented by:**

**Europe:**  
 Bosch Engineering GmbH  
 Motorsport  
 Robert-Bosch-Allee 1  
 74232 Abstatt  
 Germany  
 Tel.: +49 7062 911 9101  
 Fax: +49 7062 911 79104  
 motorsport@bosch.com  
 www.bosch-motorsport.de

**North America:**  
 Bosch Engineering North America  
 Motorsport  
 38000 Hills Tech Drive  
 Farmington Hills, MI 48331-3417  
 United States of America  
 Tel.: +1 248 876 2977  
 Fax: +1 248 876 7373  
 motorsport@bosch.com  
 www.bosch-motorsport.com

**Latin America:**  
 Robert Bosch Ltda  
 Motorsport  
 Av Juscelino Kubitscheck de  
 Oliveira 11800  
 Zip code 81460-900  
 Curitiba - Parana  
 Brasilia  
 Tel.: +55 41 3341 2057  
 Fax: +55 41 3341 2779

**Asia-Pacific:**  
 Bosch Engineering Japan K.K.  
 Motorsport  
 18F Queen's Tower C, 2-3-5 Minato Mirai  
 Nishi-ku, Yokohama-shi  
 Kanagawa 220-6218  
 Japan  
 Tel.: +81 45 650 5610  
 Fax: +81 45 650 5611  
 www.bosch-motorsport.jp

**Australia, New Zealand and South Africa:**  
 Robert Bosch Pty. Ltd  
 Motorsport  
 1555 Centre Road  
 Clayton, Victoria, 3168  
 Australia  
 Tel.: +61 (3) 9541 3901  
 motor.sport@au.bosch.com