

CURRENCY COUNTERS

# 75 Series

*Continually exceeding your expectations of commercial-grade currency counters*



**MAGNER**<sup>®</sup>

Proven Performance and Quality

# MAGNER® 75 Series

The 75 Series offers the technology, performance, and productivity you expect from MAGNER® — the global leader in table-top currency counters. With a wide range of features and options, the 75 Series is designed for accurate high speed processing, simplicity of operation, and rugged reliability, even in the most demanding applications.

Choose from a basic model with variable batching or a more advanced model with dual head, dual threshold magnetic suspect counterfeit detection. Should your application require it, we also offer ultraviolet and magnetic suspect counterfeit detection in combination.


Our Currency Counters have evolved from years of experience and are backed by unmatched support through our network of MAGNER® Authorized Distributors Nationwide.

## 75 SERIES MODEL RANGE

Standard 75 shown below and specifications on right

**M** Dual-head, Dual Threshold, Magnetic Counterfeit Detection

**U** **M** Combined Ultraviolet and Magnetic Counterfeit Detection

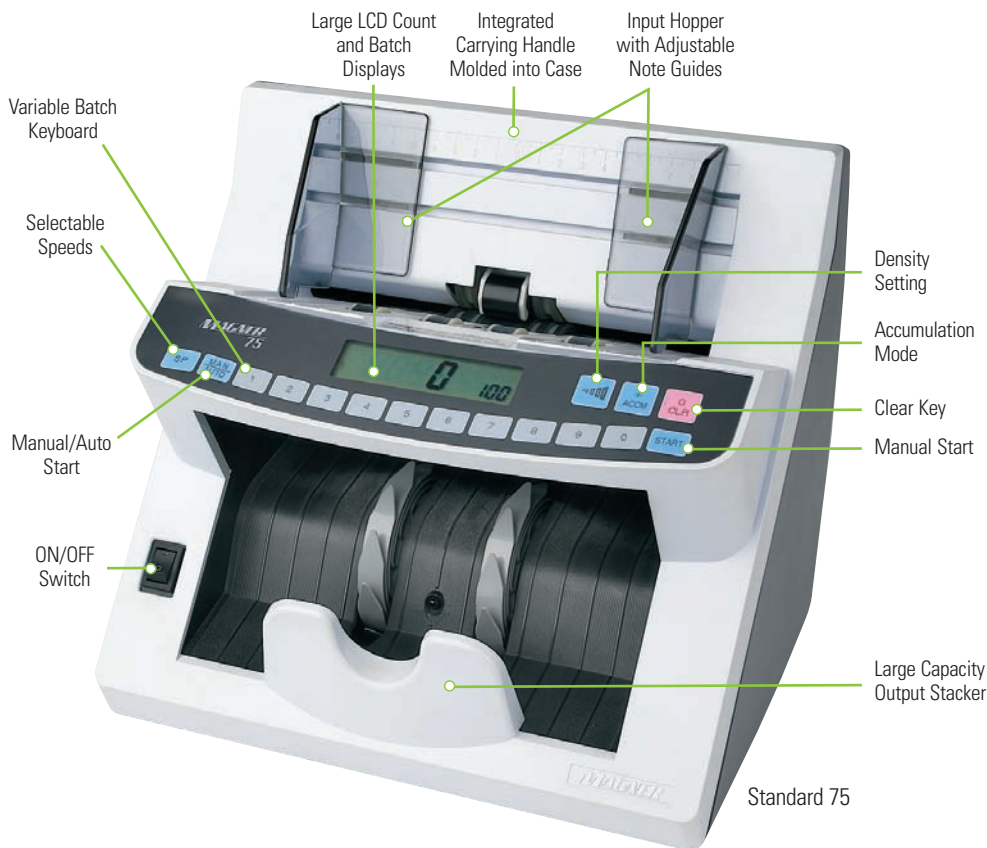

## 75 SERIES SPECIFICATIONS

### Counting Speed

600, 1200, 1500 notes per minute (selectable)

### Display Type: LCD

3 digit batch display  
4 digit count display

### Document Size Limits:

1.97" x 3.54" to 3.94" x 7.28"  
50 mm x 90 mm to 100 mm x 185 mm

### Hopper Capacity

500 circulated notes

### Stacker Capacity

150 circulated notes

### Batching

Variable 1 to 999

### Error Detection

Double, chain, half-note, jam, hopper jam, short count, open door, note in stacker

### Counterfeit Detection (optional)

Dual-head, dual threshold magnetic detection  
Ultraviolet detection

### Document Feed Mechanism

Friction, intermittent roller type

### Dimensions

10.04" (H) x 11.02" (W) x 9.06" (D)  
255 mm (H) x 280 mm (W) x 230 mm (D)

### Net Weight

15.50 lbs (7.03 kg.)

### Power Source

120V 60Hz/230V 50Hz

### Power Consumption

70W (average)

### Operating Temperature Limits

+32° F to +104° F (0° C to +40° C)

### Density Setting

Adjustable, 5 levels

### Connection

RS232 interface

### Options

External display  
Counterfeit detection

*Specifications are subject to change*

**MAGNER®**

Magner Corporation of America  
41 West Street  
Middlefield, Connecticut USA 06455

PHONE: (860) 349-1097  
FAX: (860) 349-1257

EMAIL: info@magner.com  
www.magner.com

100% recyclable.  
Paper contains 50% total recycled content –  
25% post-consumer. Printed with soy-based inks.

**SRS Systems Inc.**

5885 East Circle Dr. Suite 130  
Cicero, NY 13039

315.458.7813 Local 315.458.7814 Fax 800.875.6565 Toll  
Free

[www.srssystem.com](http://www.srssystem.com)

