



WWW.NKUKU.COM
T:+44(0)1803 866847
E:INFO@NKUKU.COM

ASSEMBLY INSTRUCTIONS

TABOSA BRASS SPOT LIGHT

Thank you for purchasing this Tabosa Brass Spot Light.
Please read these instructions carefully before use to ensure safe and
satisfactory operation of this product.
Please keep these instructions for future reference.

WARNING!

This product is Class II and must not be earthed. If there are any incoming earth cables, they must be joined together and well insulated with good quality insulation tape. This is to ensure earth continuity throughout your property.

Please read these instructions carefully before commencing any work. It is recommended that this fitting is installed by a qualified electrician. Install in accordance with the IEE Wiring regulations and the Building Regulations. To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit. If replacing an existing fitting, make a note of the connections. Always use the correct type and wattage bulb. Never exceed the wattage stated. When changing a bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.

This product is suitable for indoor use only.

Using a dimmer switch

This product is suitable for use with a dimmer switch. Please consult an electrician to ensure that the correct dimmer switch is used for the circuit.

FIXING INSTRUCTIONS

Make sure you have the following items which are required to install this light fitting: Small electrical screwdriver, cross head screwdriver & insulation tape. The installation of this fitting will be much easier with the help of an assistant.

STEP 1

Before removing the existing fitting or ceiling rose, carefully note the position of each set of wires. Where a ring/loop circuit exists there will be a fourth set of wires (usually red) that are not connected to the L or N of the fitting. This circuit must be kept together in the 4th terminal of the connection block, and insulated from the fitting and the other wires. The ring/loop will remain live unless isolated at the mains or circuit breaker regardless of the position of the wall switch. Existing lighting products must be completely removed before installation of a new product.

STEP 2


Unscrew the fixing plate from the back of the fitting. Mark the position of the of the wall screws using the holes in the fixing plate as a template. Drill holes in the marked positions and apply the rawl plugs. Take care to avoid damaging any concealed wiring and pipes. Pass the mains wire through the black conduit and hook up the light using the loop on the white attachment block.

STEP 3

Having identified the household wiring from your existing light fitting, connect the wiring to connection block in the following way. The brown wire in the light fitting should be connected to the live wiring in the household supply. The live connection point is marked with "L" on the connection block. The blue wire in the light fitting should be connected to the neutral wiring in the household supply. The neutral connection point is marked with "N" on the connection block.

HOUSEHOLD SUPPLY

LIGHT FITTING

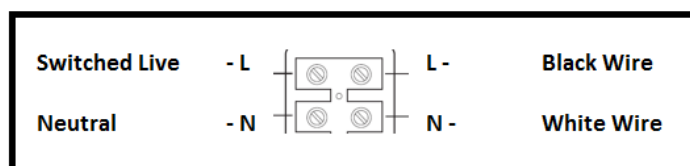

Check that:

- You have correctly identified the house wires.
- The connections are tight.
- No loose strands have been left out of the connection block.
- Cover all exposed areas of the connection block with 2 layers of insulation tape
- Using the screws provided attach wall light by passing the screw through the brass fixing plate and into the rawl plugs fitted in Step 2.

STEP 4

Install a GU10 bulb not exceeding a maximum wattage of 40W.

STEP 5

Replace fuse or circuit breaker and switch on. Your light is now ready for use.

CARE AND CLEANING

Finish – We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.

SAFETY INFORMATION

For your safety, switch off the mains supply before changing light bulbs or cleaning.

FITTING/ REPLACING THE BULB

Bulb type - 40W Max GU10

When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the wattage stated.