




Your Innovative Packaging Solutions Partner

Technical Data Sheet

D095 - Dish, 1000/172x120 MTE

PRODUCT DIMENSIONS (mm)

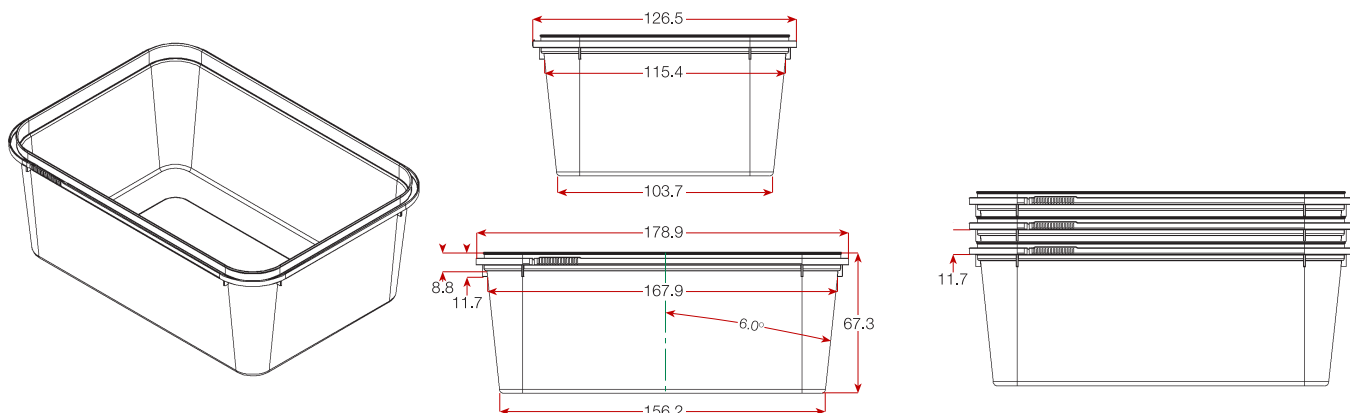

SHAPE Rectangular

LID OPTIONS

| | |
|-----------------------|--------------------------|
| Lid | L094 - 172 x 120 Overlid |
| Closure type | Overlid |
| Seal integrity | Overlid |

VOLUME (typical values)

| | | |
|---------------|----------|-----------------------|
| Brimfull | 1,160 ml | without any headspace |
| Underlid L094 | 1,160 ml | without any headspace |

TAMPER EVIDENCE Tamper evidence break-out tab.

HANDLE Not available

HEIGHT (typical values) With lid L094 71.4 mm

WEIGHT (typical values)

| | |
|----------|--------|
| Dish | 31.1 g |
| Lid L094 | 17.4 g |

PACKING

| | | | |
|------------------------------|--|---------------------|---------------------|
| No. per carton | 222 | | |
| Carton size | 517 mm L x 385 mm W x 395 mm H (0.079 m ³) | | |
| Carton weight when full | 7.5 kg +/- kg | | |
| Carton liner | Polypropylene (blue) | | |
| Stack sleeve | Polypropylene. | | |
| Pallet Specifications | Export | South Island | North Island |
| Cartons per pallet | 30 | 30 | 18 |
| Quantity per pallet | 6,660 | 6,660 | 3,996 |
| Pallet dimensions | 1200 mm x 1000 mm | 1200 mm x 1100 mm | 1200 mm x 1100 mm |
| Height including pallet | 2.13 m | 2.13 m | 1.34 m |
| Cubic metres (incl. pallet) | 2.55 m ³ | 2.81 m ³ | 1.76 m ³ |

RAW MATERIAL

 PP (polypropylene)
All of Tecpak's products are made from plastic polymers in grades that are suitable for food packaging and comply with US regulations FDA Title21, CFR Part 177 1520 for Olefin Polymers and/or EU Directive 2002/72/EEL.

ENVIRONMENTAL The material used in this product is recyclable. Local authorities should be contacted for information on curbside collection.

COLOURS Natural, White. Other colours available on request.

DECORATION OPTIONS None available.

QUALITY Tecpak Industries Limited is certified to ISO9001:2000.

FOOD SAFETY Tecpak Industries Limited is certified to ISO22000:2005 Food Safety Management Systems.

PERFORMANCE

Hot Filling
The maximum recommended fill temperature is 50° C. Internal process trials should be undertaken to determine the viability of this product for the intended use.

Freezing
The standard resin used for natural, white and coloured products will resist temperatures down to -20°C. Deep freezing below this temperature may require a special resin available on request. The standard resin used for clear products may become brittle at temperatures below 0° C. Internal process trials should be undertaken to determine the viability of this product for the intended use.

Re-heating
This product may be microwaved. Internal process trials should be undertaken to determine the viability of this product for the intended use.

Shelf Life
The compliance of the product to the technical specifications in this data sheet is guaranteed for 12 months after the date of delivery subject to suitable storage.

Stacking (empty). Ideally pallets should be stacked no more than two high.

Stacking (full). It is recommended that this product be packed into self supporting trays or cardboard boxes. Internal process trials should be undertaken to determine the viability of free-standing stacking and transportation.

Other
Resins used are dishwasher safe and are designed for re-usability.

In all cases internal trials should be undertaken to determine the suitability of the packaging through all stages of the process.