

# SPECIFICATIONS


## FEATURES:

- All brass construction.
- Available in all finishes. Warranty varies according to finish selection.
- Thermostatic valve cartridge P/N: 18.30.300
- Volume control cartridge P/N: 18.30.195
- Certified to meet or exceed the following codes and standards:  
ASME A112.18.1/CSAB 125.1-2011

- Installation height from floor to center of valve to be determined by homeowner or installer.
- Do not rough-out without copper rough-in template.  
Guide will be sent ahead upon request.



## 1/2" Exposed Thermostatic Shower Set with Diverter & Handshower Offset Lever

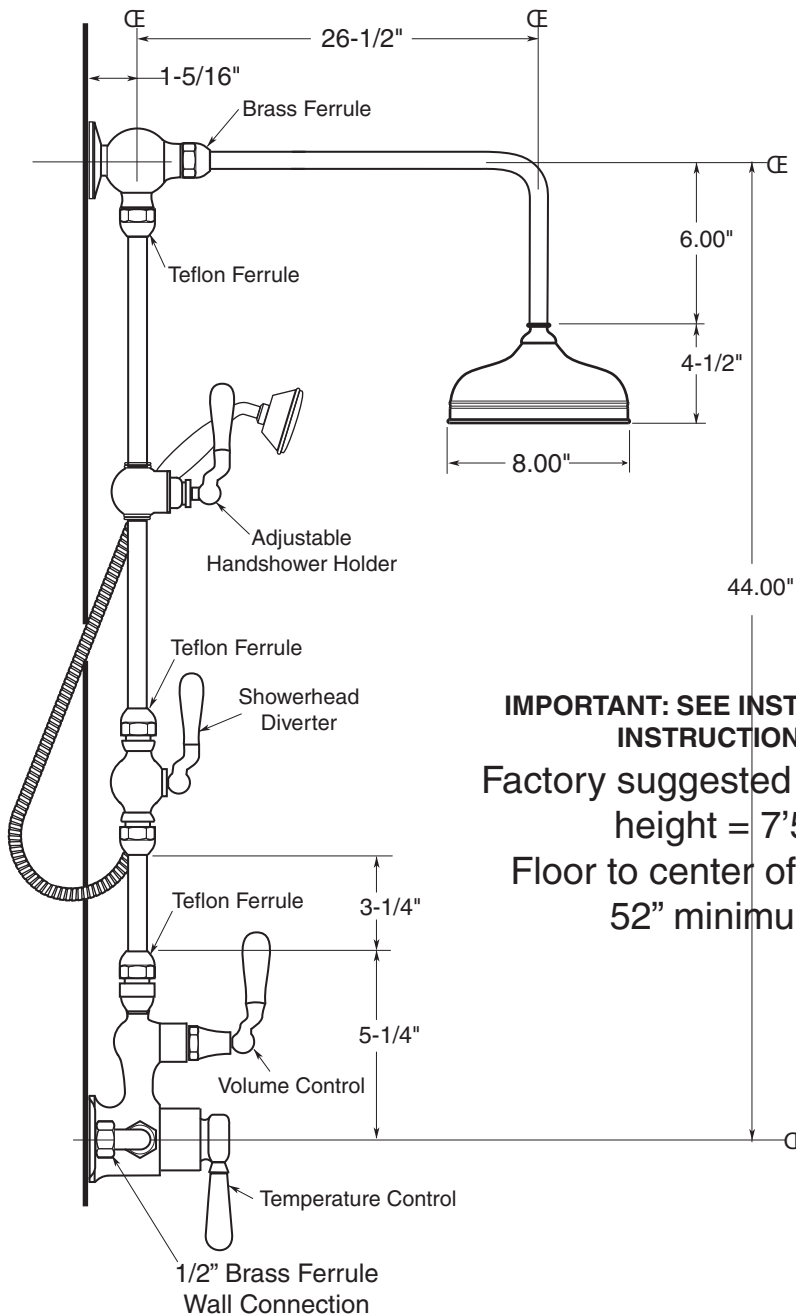

**IMPORTANT: SEE INSTALLATION INSTRUCTIONS**  
 Factory suggested minimum height = 7'5"  
 Floor to center of valve = 52" minimum

