
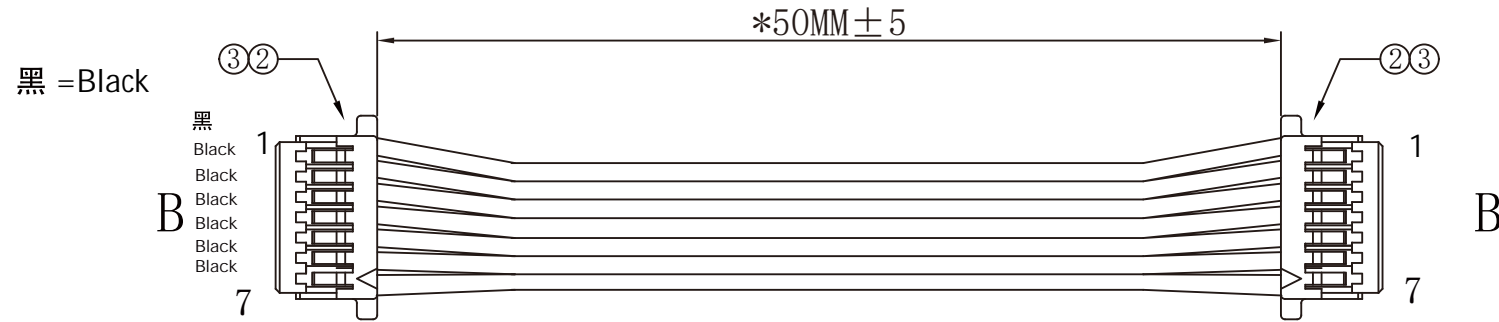


no.	Changes the record	name	date




Technical requirements:

- The materials comply with ROHS/REACH requirements.
- The wires have UL certification.
- There may be color variations in wires from different batches.
- Tensile strength between terminals and wires: ≥1.2kgf
- Tensile strength between terminals and housings: ≥0.45kgf/pin
- *indicates critical controlled dimensions in the diagram.

Testing Requirements:

- 1.100% pass rate for finished product short-circuit tests.
- 2.Insulation resistance: 5M ohm MIN
- 3.Conductive impedance: 3.0 ohm MAX
- 4.Test voltage.DC300V 0.01s

3	HOUSING	SH1.0-7P Rubber Housing in White		PCS	
2	TERMINAL	SH1.0-T		PCS	
1	WIRE	UL1571 #28AWG,Outer Sheath 50-55PA Material OD:0.8mm 7P Black Ribbon Cable L=56mm		PCS	
NO.	product name	Detail specification	part no.	Unit	QTY

					
customer name		item no.			
Product name SH1.0-7P, both ends facing the same direction,1571/28 wire, L=50mm					
draw no.		KNT-LT-002		product no.	
Unit	Edition	approved	checked	desigend	date
mm	A/0				2021.09.18