


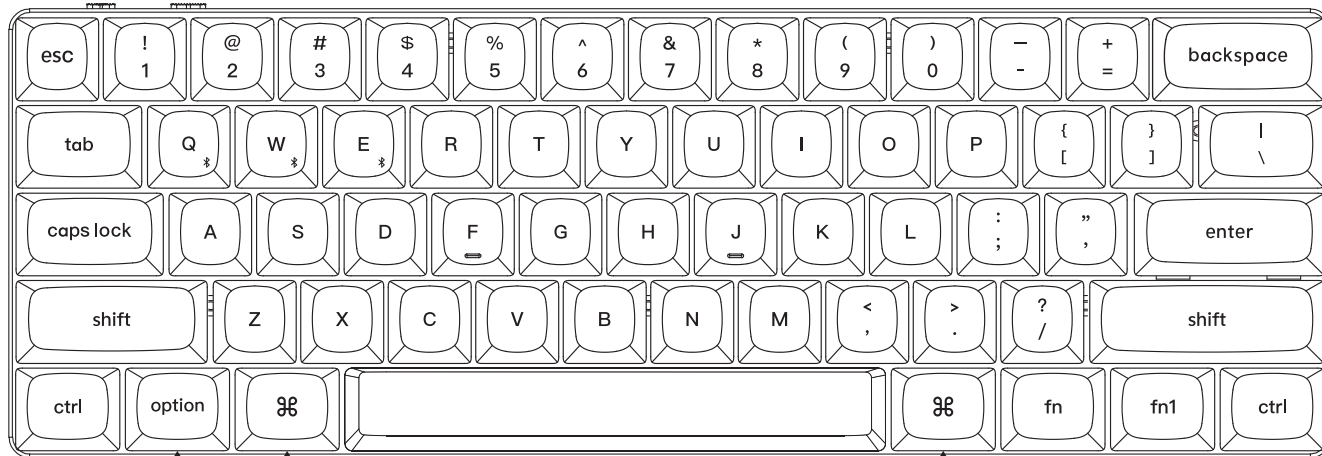


If you are a Windows user, please find the appropriate keycaps in the box, then follow the instructions below to find and replace the following keycaps.


Quick Start Guide

1 Connect Bluetooth

Press fn + Q (for 4 seconds) and pair with device named Keychron K9 Pro.



2 Connect Cable

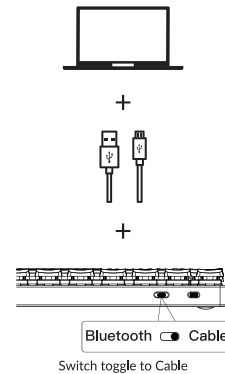


3 The VIA Key Remapping Software

Please visit caniusevia.com to download the latest VIA software to remap the keys. If the VIA software cannot recognize your keyboard, please reach out to our support to get the instruction. (VIA only works when the keyboard is connected by wire to the computer.)



5 Multimedia Key and Function Key

Multimedia keys



In order to get Multimedia Key, you need to press fn and



Key.

In order to get Function Key, you need to press fn1 and




Key.

Function keys

F1 / F2 / F3 / F4 / F5 / F6 / F7 / F8 / F9 / F10 / F11 / F12


7 Adjust The Backlight Brightness

Press fn + S to increase the backlight brightness



fn + S

Press fn + X to decrease the backlight brightness



fn + X


9 Watch The Building Tutorial On Our Website

If you are building the keyboard for the first time, we highly recommend you watch the building tutorial video on our website first, then start building the keyboard yourself.




4 The Layers

There are five layers of key settings on the keyboard. The layer 0 is for the Mac system. The layer 1 is for the Windows system. The layer 2 is for the Mac Multimedia keys. The layer 3 is for the Windows Multimedia keys. The layer 4 is for the Function keys.




If your system toggle is switched to Mac, then the layer 0 will be activated.

Mac Win



If your system toggle is switched to Windows, then the layer 1 will be activated.

Mac Win



6 The Backlight

Press fn + A to change the lighting effect



fn + A

Press fn + caps lock to turn the backlight on/off




fn + caps lock

8 Warranty

The keyboard is highly customizable and easy to be rebuilt. If anything goes wrong with any of the keyboard components of keyboard during the warranty period, we will only replace the defective parts of the keyboard, not the whole keyboard.



10 Factory Reset



Troubleshooting? Don't know what's going on with the keyboard?

- 1 Plug in the power cable and switch the keyboard to Cable mode.
 - 2 Factory reset the keyboard by pressing fn1 + J + Z (for 4 seconds).
 - 3 Download the right firmware and QMK Toolbox from our website.
 - 4 Switch the keyboard to OFF mode and remove the space bar keycap to find the reset button on the PCB.
 - 5 Hold the reset key first, then switch the keyboard to Cable mode. Release the reset key, and the keyboard will now enter DFU mode.
 - 6 Flash the firmware with the QMK Toolbox.
 - 7 Factory reset the keyboard again by pressing fn1 + J + Z (for 4 seconds).
- * Step by step guide can be found on our website.

Not Happy

support@keychron.com