

If you are a Windows user, please find the appropriate keycaps in the box, then follow the instructions below to find and replace the following keycaps.

Quick Start Guide

1 Switch To The Right System

Please make sure the system toggle on the top center has been switched to the same system as your computer's operating system.



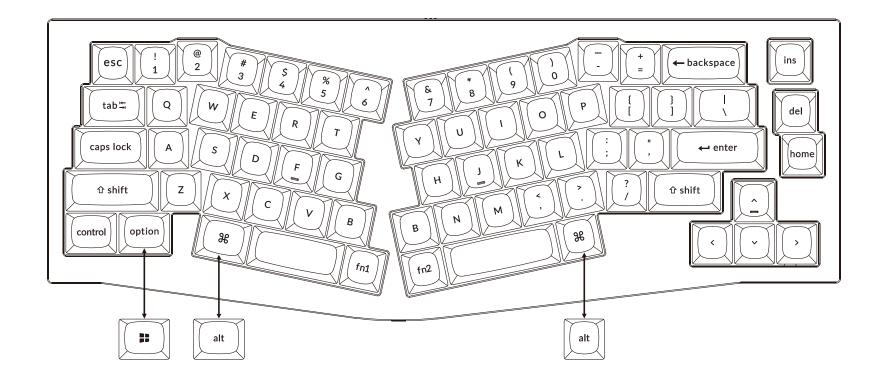

2 The VIA Key Remapping Software

Please visit <u>caniusevia.com</u> to download the latest VIA software to remap the keys. If the VIA software cannot recognize your keyboard, please reach out to our support to get the instruction.





There are five layers of key settings on the keyboard. The laver 0 is for the Mac system.

The layer 1 is for the Windows system.

The layer 2 is for the Mac Multimedia keys. The layer 3 is for the Windows Multimedia keys.

The layer 4 is for the Function keys.



Mac Multimedia

If your system toggle is switched to Mac, then the laver 0 will be activated.

If your system toggle is switched to Windows, then the laver 1 will be activated.




Mac 🖜 Win LAYER 0 1 2 3

5 The Backlight

Press fn1 + Q to change the lighting effect



Press fn1 + tab to turn the backlight on/off




7 Adjust The Backlight Speed


Press fn1 + T to increase the light effect speed



Press fn1 + G to decrease the light effect speed



9 Watch The Building Tutorial On Our Website





4 Multimedia Key and Function Key

Multimedia keys

※/※/80/88/シ/シ/40/01/00/11/00/10/10)


Function keys

F1 / F2 / F3 / F4 / F5 / F6 / F7 / F8 / F9 / F10 / F11 / F12


In order to get Multimedia Key, you need to press fn1 and In order to get Function Key, you need to press fn2 and

6 Adjust The Backlight Brightness

fn1 + W to increase the backlight brightness



fn1 + S to decrease the backlight brightness




8 Warranty

The keyboard is highly customizable and easy to be rebuilt. If anything goes wrong with any of the keyboard components of keyboard during the warranty period, we will only replace the defective parts of the keyboard, not the whole keyboard.



10 Factory Reset

Not Happy



Troubleshooting? Don't know what's going on with the keyboard?

- 1) Try factory reset by pressing fn1 +J +Z (for 4 seconds).
- 2 Download the right firmware for your keyboard from our website. Remove the power cable from the keyboard.
- (3) Remove the space bar keycap to find the reset button on the PCB.
- 4 Hold the reset key while plugging in the power cable and then release the reset key. The keyboard now will enter DFU mode.
- (5) Flash the firmware with the QMK Toolbox.
- 6 Factory reset the keyboard again by pressing fn1 + J + Z (for 4 seconds).
- * Step by step guide can be found on our website.