

VERRO SERIES: VYCJSF-1HE

Waterless Heat Exchange Steamer

Project: _____ Item: ____




Standard Features:


- AISI 304 Grade Stainless Steel
- Heavy duty complete stainless steel cabinet frame
- Powerful 18-Jet Duckbill Cast Iron burner
- 2mm thick insulated heat exchange chamber
- Efficient omnidirectional conically perforated steam vent
- Overheat tank safety protection device fitted
- Automatic ball float refill mechanism allows for easy operation
- 37L water capacity
- 7-Hole perforated steaming plate
- Multi-setting gas valve as standard allowing for greater regulation of flame setting
- Flame failure fitted as standard
- Front access to all components makes service easy
- 36 Month Warranty

Options:

- Natural or LP Gas
- Non-swivel rear castors

Specifications:

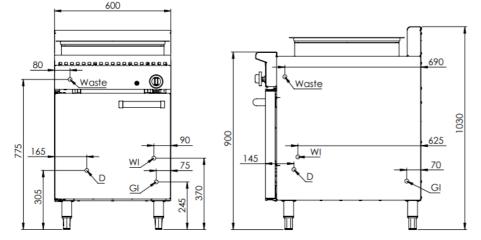



	MODEL	LENGTH (mm)	DEPTH (mm)	HEIGHT (mm)	GAS CONSUMPTION (Mj/h)	
					NG	LPG
	VYCJSF-1HE	600	840	1030	87.5	84

Connections:

GAS (GI)	WATER (WI)	DRAIN (D)	SUPPLY PRESSURE (kPa)	
(BSP)		WASTE	NG	LPG
³⁄₄" (M)	½" (Copper)	D = 3/4" BSP (F) WASTE = 1-1/2" BSP (M)	1.0	2.6

- · Regulator is included within the unit
- Must be installed by an authorised installer in accordance to AS/NZS5601.01

Due to ongoing Product Development, Product Improvement and Research, B+S Commercial Kitchens reserves the right to alter specification without notice.

Approval Number: GMK 10697





