

# Display Chest Freezer 176L - Curved Glass Top

| Chest Freezers



2 PVC-coated baskets keep items neatly arranged

Integrated lock system ensures merchandise is secure when unattended

Quick-drain plug simplifies defrosting and cleaning

Sliding glass lids open left and right allowing for effortless access to merchandise

Tempered glass lids stays cool during operation and provide a clear view

Digital display for easy temperature monitoring

High load limit maximises storage

Decal-friendly design for customisable branding (POA)

Corrosion-resistant construction for longevity in commercial environments

High energy efficiency with 8-star energy rating thanks to natural refrigerant


Castors for easy movement and placement

2 Years Bromic Extra Care Warranty - Labour and Parts

Fully compliant with Australian safety standards and regulations

# Display Chest Freezer 176L - Curved Glass Top

Chest Freezers

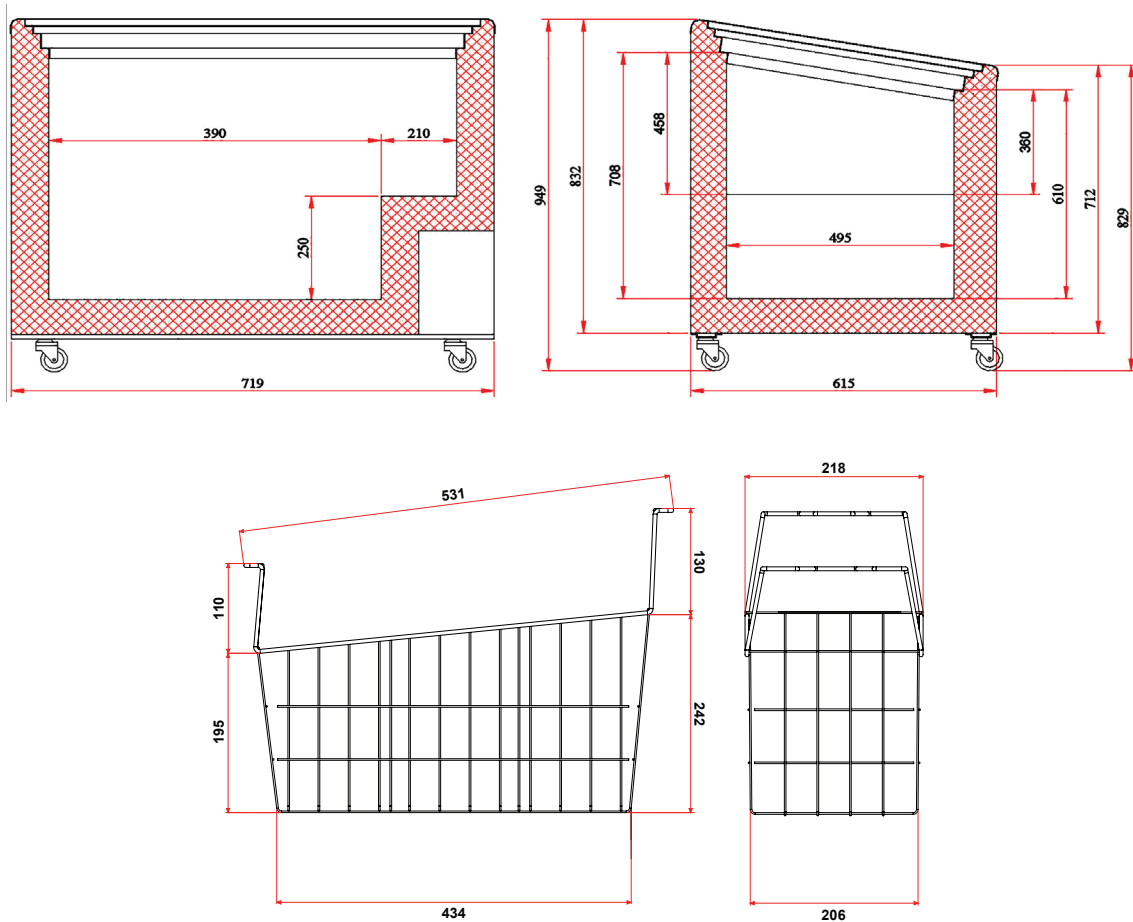

**SPECIFICATIONS** **DIMENSIONS**

Model Number	CF0200ATCG-NR	Plug Plug	1 x 10A	<b>External (mm)</b>
Part Number	3735301-NR	Plug Location	Rear, bottom right	<b>Width</b> 719
Volume	176L	Cord Length	2m	<b>Depth</b> 615
Unit Weight	57kg	Colour	White	<b>Height</b> 949
Packaged Weight	62kg	Internal Light	No	<b>Internal (mm)</b>
Adjustable Temp. Range	-22°C to -12°C	No. of Lids	2	<b>Width</b> 600
Max. Ambient Temp.	35°C	Lid Type	Glass	<b>Depth</b> 495
Climate Class	4L1	Lid Shape	Curved	<b>Height</b> 708
Energy Consumption	1.298kWh/24h	Lid Style	Sliding	<b>Internal (mm)</b>
GEMS Star Rating	8 Stars	Lid Lock	Yes	<b>Width</b> 600
Refrigeration Capacity	190W	No. of Baskets	2	<b>Depth</b> 495
Refrigerant	R600a	Basket Dimensions	206(w) x 434(d) x 195(h) mm	<b>Height</b> 708
Air Circulation	Static	Defrost System	Manual	<b>External (mm)</b>
Rated Current	0.5A	Temp. Controller	Analogue controller, digital display	<b>Width</b> 740
Electrical Voltage	220-240V	Castors	Yes	<b>Depth</b> 680
Frequency	50Hz	Warranty	2 Years Bromic Extra Care Warranty - Labour and Parts	<b>Height</b> 980
Power Supply	Single Phase			