


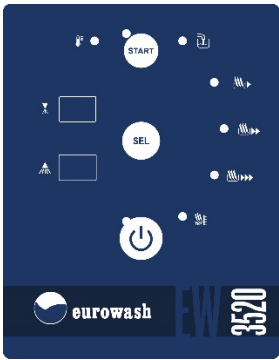


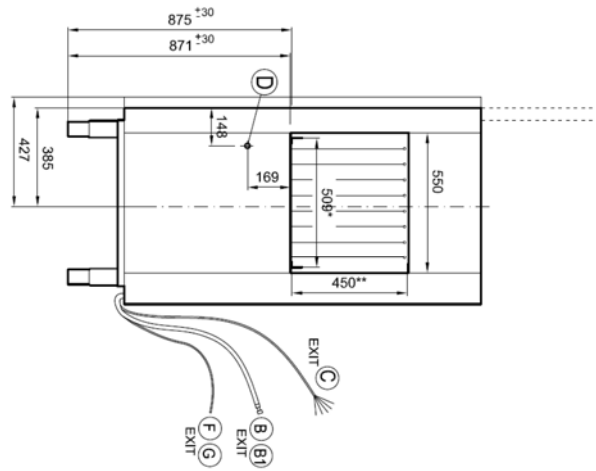




↘	Model	EW 3520	
	Code Production	T112ENZT	
Interface :			
			
			
↕	Overall Dimension (Width-Depth-Height) *open	mm	1.968 x 770 x 1.615(2088*)
	Packaging Dimension (WxDxH)	mm	2.100x920x1800
	Gross weight	Kg	300
	Net weight	Kg	260
	Volume	mc	3,8
□	Rack size	mm	500x500
	Useable wash chamber height	mm	450
	Tank wash construction		deep drawn
	Tank pre-wash construction		deep drawn
	General construction		double skin
	Door Construction		double skin and insulated
↘	Wash Tank volume	liter	70
	Wash Tank heating element	W	10.500
	Wash Tank surface strainers		stainless steel
	Wash drawer-like strainers		optional
	Pre-Wash Tank volume	liter	70
	Pre-Wash Tank heating element	W	-
	Pre-Wash Tank surface strainers		stainless steel
	Pre-Wash drawer-like strainers		optional
☑	Wash pump type		double flow
	Wash pump power	W	1.500
	Wash pump delivery	Lt/min	720
	Wash temperature	°C	60 (63)
	Pre-Wash pump type		double flow
	Pre-Wash pump power	W	1.500
	Pre-Wash temperature	°C	45
↘	Boiler volume	liter	17
	Boiler heating element (with 50°C inlet water) standard	W	16.000
	Boiler heating element (with 10°C inlet water)	W	31.000
	Boiler heating element (with 10°C inlet water +Recovery)	W	23.500
	Back-flow system		break tank
☑	Rinse type		single rinse
	Pre-Rinse		-
	Rinse temperature	°C	82 (65)
	Rinse water consumption	Liter /hour	240min 320max
	Inlet water temperature	°C	Cold:10-40°C Hot:45-60°C

	<i>Optimal external water pressure</i>	<i>bar</i>	<i>from 2 to 4</i>
	<i>Drain system</i>		<i>overflow</i>
	<i>Drain size</i>	<i>G</i>	<i>1' ½"</i>
	<i>Productivity – speed 1</i>	<i>Racks per hour</i>	<i>270</i>
	<i>Productivity – speed 2</i>	<i>r/h</i>	<i>200</i>
	<i>Productivity – speed 3</i>	<i>r/h</i>	<i>100</i>
	<i>Noise level</i>	<i>db</i>	<i>< 70</i>
	<i>Conveyor power</i>	<i>W</i>	<i>500</i>
	<i>Electric Connection</i>	<i>V - ph - Hz</i>	<i>400V 3N 50Hz</i>
	<i>Max Electric Power with 50°C standard</i>	<i>W</i>	<i>30.200</i>
	<i>Max Electric Power with 10°C</i>	<i>W</i>	<i>45.200</i>
	<i>Max Electric Power with 10°C +recovery</i>	<i>W</i>	<i>37.900</i>
	<i>Plates racks</i>	<i>Nr1</i>	<i>780072</i>
	<i>Flat Rack</i>	<i>Nr1</i>	<i>780135</i>
	<i>Cutterly Rack</i>	<i>Nr1</i>	<i>780139</i>
	<i>Electric cable</i>		<i>not included</i>
	<i>Drain hose</i>		<i>YES</i>
	<i>Fill hose</i>		<i>YES</i>

<i>Rinse aid and detergent dispenser</i>	<i>Optional</i>
<i>Increase power for cold feed</i>	<i>Optional</i>
<i>Drying zone (6 or 9kw)</i>	<i>Optional</i>
<i>Corner drying zone on 90° (6 or 9kw)</i>	<i>Optional</i>
<i>Heat recovery system</i>	<i>Optional</i>
<i>Chemical product's level probe</i>	<i>Optional</i>
<i>Emergency switch</i>	<i>Optional</i>
<i>End limit switch</i>	<i>Optional</i>
<i>Corner prewash</i>	<i>Optional</i>
<i>Heat pump</i>	<i>Optional</i>
<i>Neutral entry module</i>	<i>Optional</i>
<i>Drawer pre-filter</i>	<i>Optional</i>
<i>Possibility for shipment in separate modules</i>	<i>Optional</i>




* USEFUL WIDTH FOR BASKET
** USEFUL HEIGHT FOR BASKET

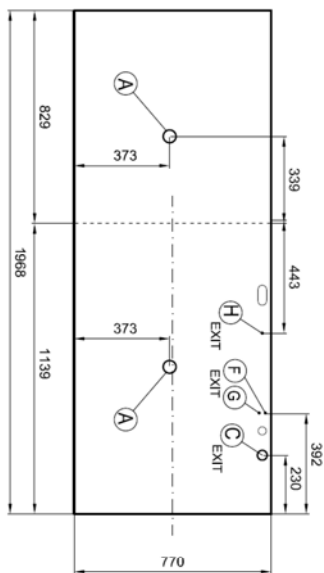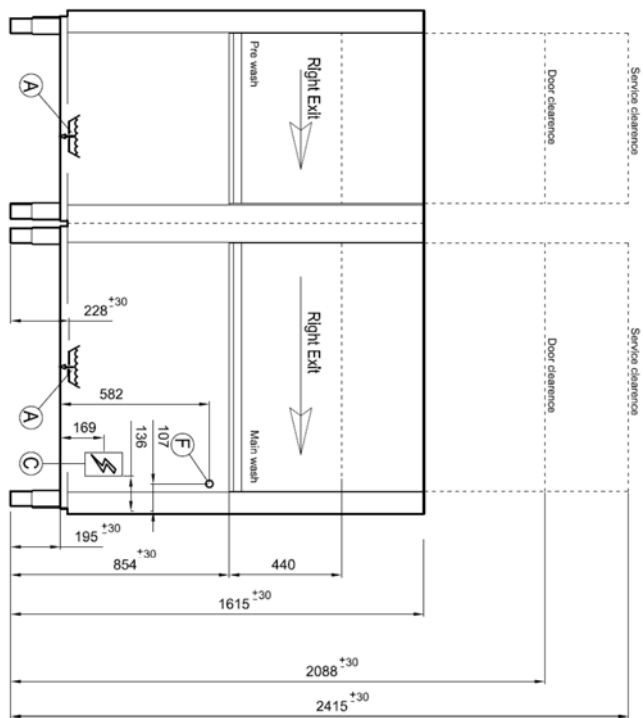



A		Ø 1"1/2 M	D		Ø PG11	End switch
A1		Ø 31 M	E		Ø 250	Steam exhaust
B		G 3/4" M	F		Ø 14 M	Detergent inlet
B1		G 3/4" M	G		Ø 7 M	Rinse add inlet
C		PG36	H		Ø 6	Equipotential
		Power supply				
			L		Ø 250	Dryer suction

Installation layout		Rack Type		T102D	
Designed by:	M.P.UCCI	Date:	15.05.2015	Code:	00
Denomination:		Rev.:			



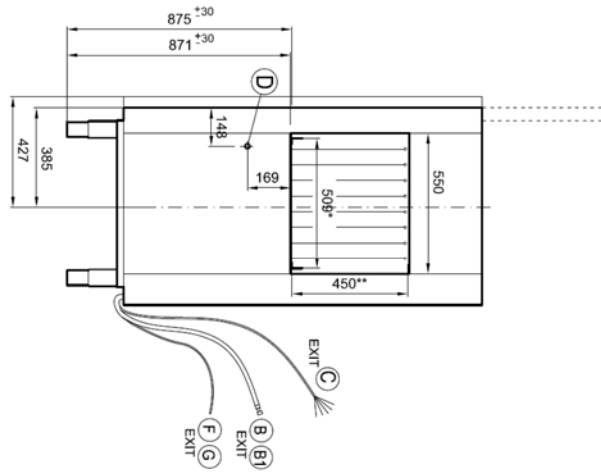

* USEFUL WIDTH FOR BASKET
** USEFUL HEIGHT FOR BASKET

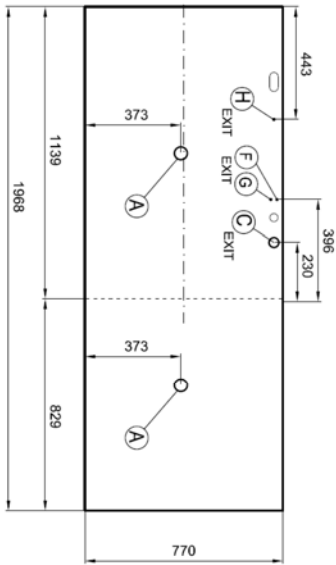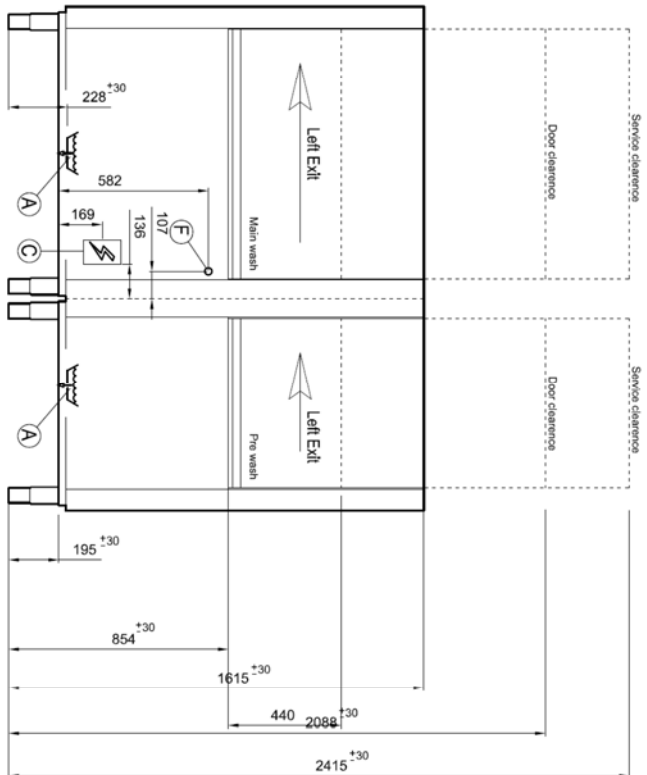

A		Ø 1"1/2 M	D		Ø PG11	End switch
A1		Ø 31 M	E		Ø 250	Steam exhaust
B		G 3/4" M	F		Ø 14 M	Detergent inlet
B1		G 3/4" M	G		Ø 7 M	Rinse aid inlet
C		PG36	H		Ø 6	Equipotential

L		Ø 250	Dryer suction
---	--	-------	---------------

Installation layout		Rack Type	
Designed by:	M.P.UCCI	Date:	15.05.2015
Determination:		Code:	T102S
		Rev.:	00

