Panel Blind Assembly Instructions

Before you begin, please unpack your Panel Blind and identify the components below.



The below components are NOT needed for initial assembly. Set them aside for now. Crossbar (1)



Gun Holders (3)



Weights Bags (2)



Front Tie-down Assembly (1)



Start by laying the cover flat on the ground with camo side down. Arrange the metal frame members in the appropriate location (See parts list). Front panel top & bottom frame members (6) and wing panel top members (2) and bottom members (2) should lineup with the cover. Hint: The long leg of the wing panel frame members go towards the inside of the blind adjacent to each front panel (as pictured below).

Loosen the Velcro, attach the rods to the vertical frame members and then re-attach the Velcro.




After all top and bottom members have been installed, stand the blind upright and fold wing panels inward to support the blind. At this point the blind is assembled. Please follow the next steps for setup instructions in the field.

For daily setup in the field follow these instructions:

Unfold and setup your Panel Blind


Assemble the crossbar (Pictured above) in one long section with all plastic attachment fittings facing the same direction. There will be 2 double bar attachments and 1 attachment on each end.



End Attachment



Snap the cross bar into place making sure each double attachment fittings and end fittings are securely in place on the front panel tubes. Using the 2 carabiner clips hanging on the front of the blind, secure the double attachment fitting by clipping the carabiner through the hole (H) in the fitting. Do not attach the end attachment to the wing panels tubes.

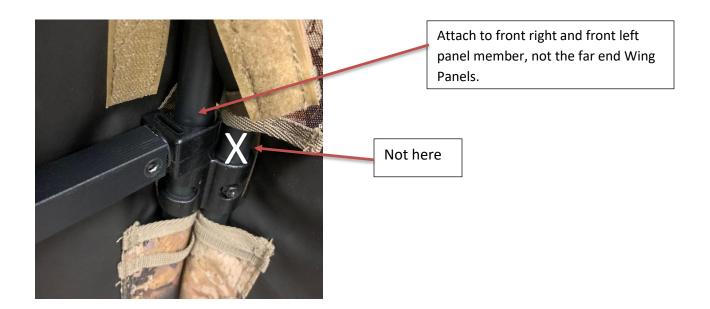

When installed correctly, the cross bar should lay flat against all 3 front panels and hold it securely to prevent it from caving-in when stubble and vegetation is installed in the front stubble straps.



Our Panel Blind includes two camo Weight Bags (pictured left) that can be filled with sand, rocks, lead or whatever and clipped to the loops on the far end of each wing panels. This will improve stability and reduce the chance of the blind blowing over when the wind is behind you, which is afterall, the desired wind direction for succesful fowling.



Another cool feature is our included gun rests. These can be attached to the cross bar by snapping them into place, tilted upward as pictured. Slide to the desired location and secure in place with the included screws. Do not over tighten! There is no need to remove them once the are installed. Just please be careful when storing your cross bar that the plastic components do not get stepped on and damaged.

Finally, we have included tent stakes and carrying pouch and also a tie-down assembly pictured on page 1. To use the tie-down, press the long stake in the ground about 10-15' in front of the blind. Then locate the cutout in the front of the blind to access the crossbar. Buckle the strap securly around the cross bar and tighten the rope. The rope can be adjusted using the small plastic adjuster. We strongly encourage using the stakes and tie-down for additional stability.

We sincerely hope you enjoy your new Rig'Em Right[®] Panel Blind. Please be careful in the field, keep all guns secure and return home safely with a lot of birds to clean and eat. We appreciate the support.

Please checkout <u>www.RigEmRight.com</u> for more of our waterfowl gear and other helpful info.