USB-A Included TR-USB Series
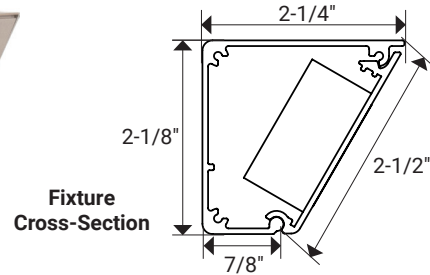
Tamper-Resistant Duplex Receptacles with USB-A/receptacle combo device Angle Power Strip

TASK lighting & power™

24" fixture shown in Satin Nickel
with Grey receptacles
TRU24-2G-P-SN

Fixture Cross-Section

2-1/4"
2-1/8"
2-1/2"
7/8"

ABOUT THE PRODUCT

• Low profile: 2-1/8"

• 20-amp tamper-resistant duplex receptacles

• 15-amp tamper-resistant USB-A/receptacle combo device

• Available in standard fixtures only: see TR Series custom fixture

• Simple to install fully assembled fixture with wood screws and wall anchors (included)

• Designer finishes to blend with any décor

• UL listed

APPLICATIONS

Under cabinet

Offices and computer labs

Shops and garages

For additional application help and suggestions, call Design Services at 866-848-9094

RECEPTACLE COLOR AND COORDINATING FINISH

BLACK (BK) — Black (B)

BRONZE (BZ) — Black (B)

SATIN NICKEL (SN) — Grey (G)

WHITE (WT) — White (W)

Ordering information

120-volt duplex receptacles with USB-A/receptacle combo device included, available in standard fixture options

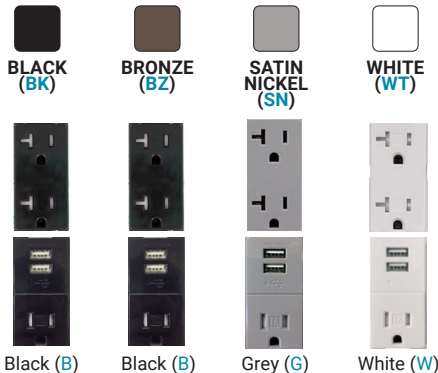| Length	Number of Combo/USB Receptacles	Number of Duplex Receptacles	Part Number
9" (229 mm)	1		TRU9-1Color-P-Finish
12" (305 mm)	1		TRU12-1Color-P-Finish
18" (457 mm)	1	1	TRU18-2Color-P-Finish
24" (610 mm)	1	1	TRU24-2Color-P-Finish
30" (762 mm)	1	1	TRU30-2Color-P-Finish
36" (914 mm)	1	1	TRU36-2Color-P-Finish
42" (1067 mm)	1	2	TRU42-3Color-P-Finish
48" (1219 mm)	1	2	TRU48-3Color-P-Finish
60" (1524 mm)	1	3	TRU60-4Color-P-Finish
72" (1829 mm)	1	3	TRU72-4Color-P-Finish

USB device is always positioned on the left side.

Blue indicates dealer choice: **Color** indicates receptacle color and **Finish** indicates fixture finish color.

TECHNICAL INFORMATION

Input Voltage	120-volt AC
Rating	cULus Listed
Amps	2-amp duplex receptacles 15-amp USB-A/receptacle combo device
Mounting	Wood screws and wall anchors (included)
Wiring	12-gauge Romex for receptacles
Environment	Dry locations
Construction Material	Powder-coated aluminum
Warranty	5 years

Ordering information

Optional installation components

| Dimensions	Description	Part Number
3" x 3" x 2-1/8"	Square junction box. Available in Black (BK), Bronze (BZ), Satin Nickel (SN), and White (WT)	TR-SQ-JB-P-Finish
Varies by order	TR Series blank filler. Order per linear foot. Available in Black (BK), Bronze (BZ), Satin Nickel (SN), and White (WT)	TR-BLANK-P-Finish

U.S. PATENT 7,156,694

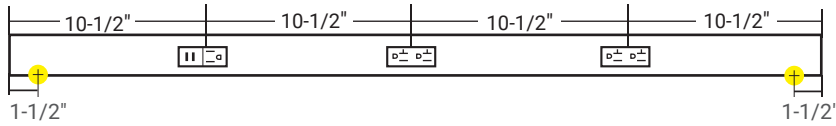c UL us LISTED
UL Listed components

5 YEAR WARRANTY

ASSEMBLED IN THE USA

TASK
lighting & power

USB-A Included TR-USB Series Angle Power Strip
Receptacle Placement (under cabinet installed view)

72" Fixture—TRU72-4ColorD-P-Finish

14-1/4"　　14-1/2"　　14-1/2"　　14-1/2"　　14-1/4"

1-1/2"　　　　　　　　　　　　　　　　　1-1/2"
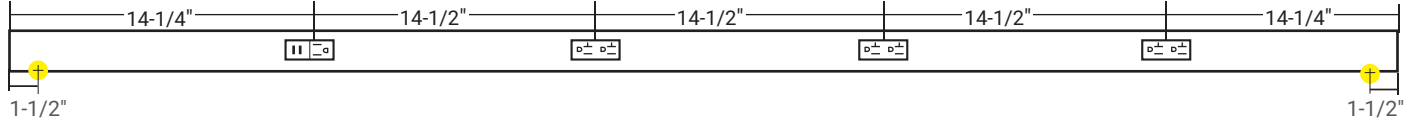
60" Fixture—TRU60-4ColorD-P-Finish

12"　　12"　　12"　　12"　　12"

1-1/2"　　　　　　　　　　　　　1-1/2"
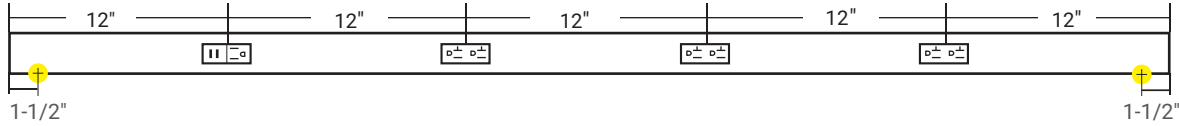
48" Fixture—TRU48-3ColorD-P-Finish

12"　　12"　　12"　　12"

1-1/2"　　　　　　　　　1-1/2"

42" Fixture—TRU42-3ColorD-P-Finish

10-1/2"　　10-1/2"　　10-1/2"　　10-1/2"

1-1/2"　　　　　　　　1-1/2"

36" Fixture—TRU36-2ColorD-P-Finish

12"　　12"　　12"

1-1/2"　　　　　1-1/2"
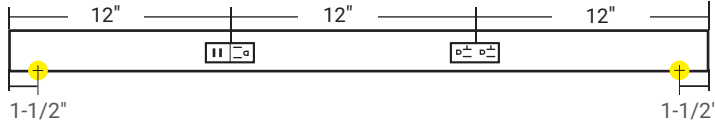
30" Fixture—TRU30-2ColorD-P-Finish

10"　　10"　　10"

1-1/2"　　　　1-1/2"
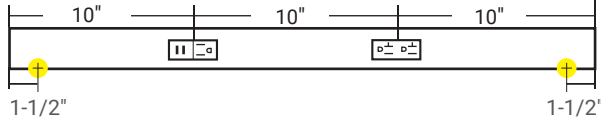
24" Fixture—TRU24-2ColorD-P-Finish

7-1/2"　　9"　　7-1/2"

1-1/2"　　　　1-1/2"
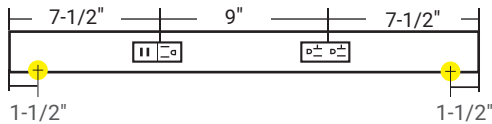
18" Fixture—TRU18-2ColorD-P-Finish

6"　　6"　　6"

1-1/2"　　　1-1/2"
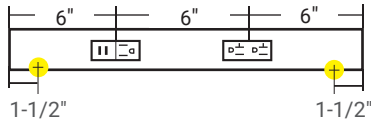
12" Fixture—TRU12-1ColorD-P-Finish

6"　　6"

1-1/2"　　1-1/2"

9" Fixture—TRU9-1ColorD-P-Finish

4-1/2"　4-1/2"

1-1/2"　1-1/2"

LEGEND

● = Knockout (all knockouts are located on the back side of fixture and are 1-1/2" from the end)

▭ = 20-amp standard duplex receptacle available in Black (B), Grey (G), or White (W)

▭ = USB-A/receptacle combo 15-amp standard receptacle available in Black (B), Grey (G), or White (W)