

2021
COLLECTION

1200x2400MM



UNIQUE
DESIGNS..

2021 COLLECTION

1200x2400MM

GLOSSY

• SERIES - 11 >>

01	STATUARIO SEM01
02	ICE ONYX02
03	CALACATTA03
04	ARMANI PLATINUM04
05	ROYAL BEIGE05
06	SARAN COLLINS CREMA06
07	EGEO BEIGE07
08	EGEO GREY08
09	FUSION GREY09

• SERIES - 21 >>

10	CALACATTA ELITE10
11	TAJ MAHAL11
12	BRECCIA BLUE12
13	SARAN COLLINS13
14	ARMANI BROWN14
15	ASPEN NATURAL15
16	EXPLOSION BLACK16

MATT & CARVING

• SERIES - 31 >>

17	MYSTIQUE GREY17
18	KANKI GREY18
19	TOBACCO WHITE19
20	TOBACCO LIGHT GREY20
21	TOBACCO CREMA21
22	TOBACCO BROWN22

2 SURFACES

Glossy | Matt & Carving

STATUARIO SEM

BRIGHT GLOSSY
FACE - 6

1200x2400mm



ICE
ONYX

BRIGHT GLOSSY
FACE - 2

1200x2400mm



CALACATTA

1200x2400mm

BRIGHT GLOSSY
FACE - 4



ARMANI PLATINUM

BRIGHT GLOSSY
FACE - 4

1200x2400mm



ROYAL BEIGE

BRIGHT GLOSSY
FACE - 3

1200x2400mm



SARAN COLLINS CREMA

1200x2400mm

BRIGHT GLOSSY
FACE - 2



**EGEO
BEIGE**

BRIGHT GLOSSY
FACE - 2


1200x2400mm



**EGEO
GREY**

BRIGHT GLOSSY
FACE - 2


1200x2400mm

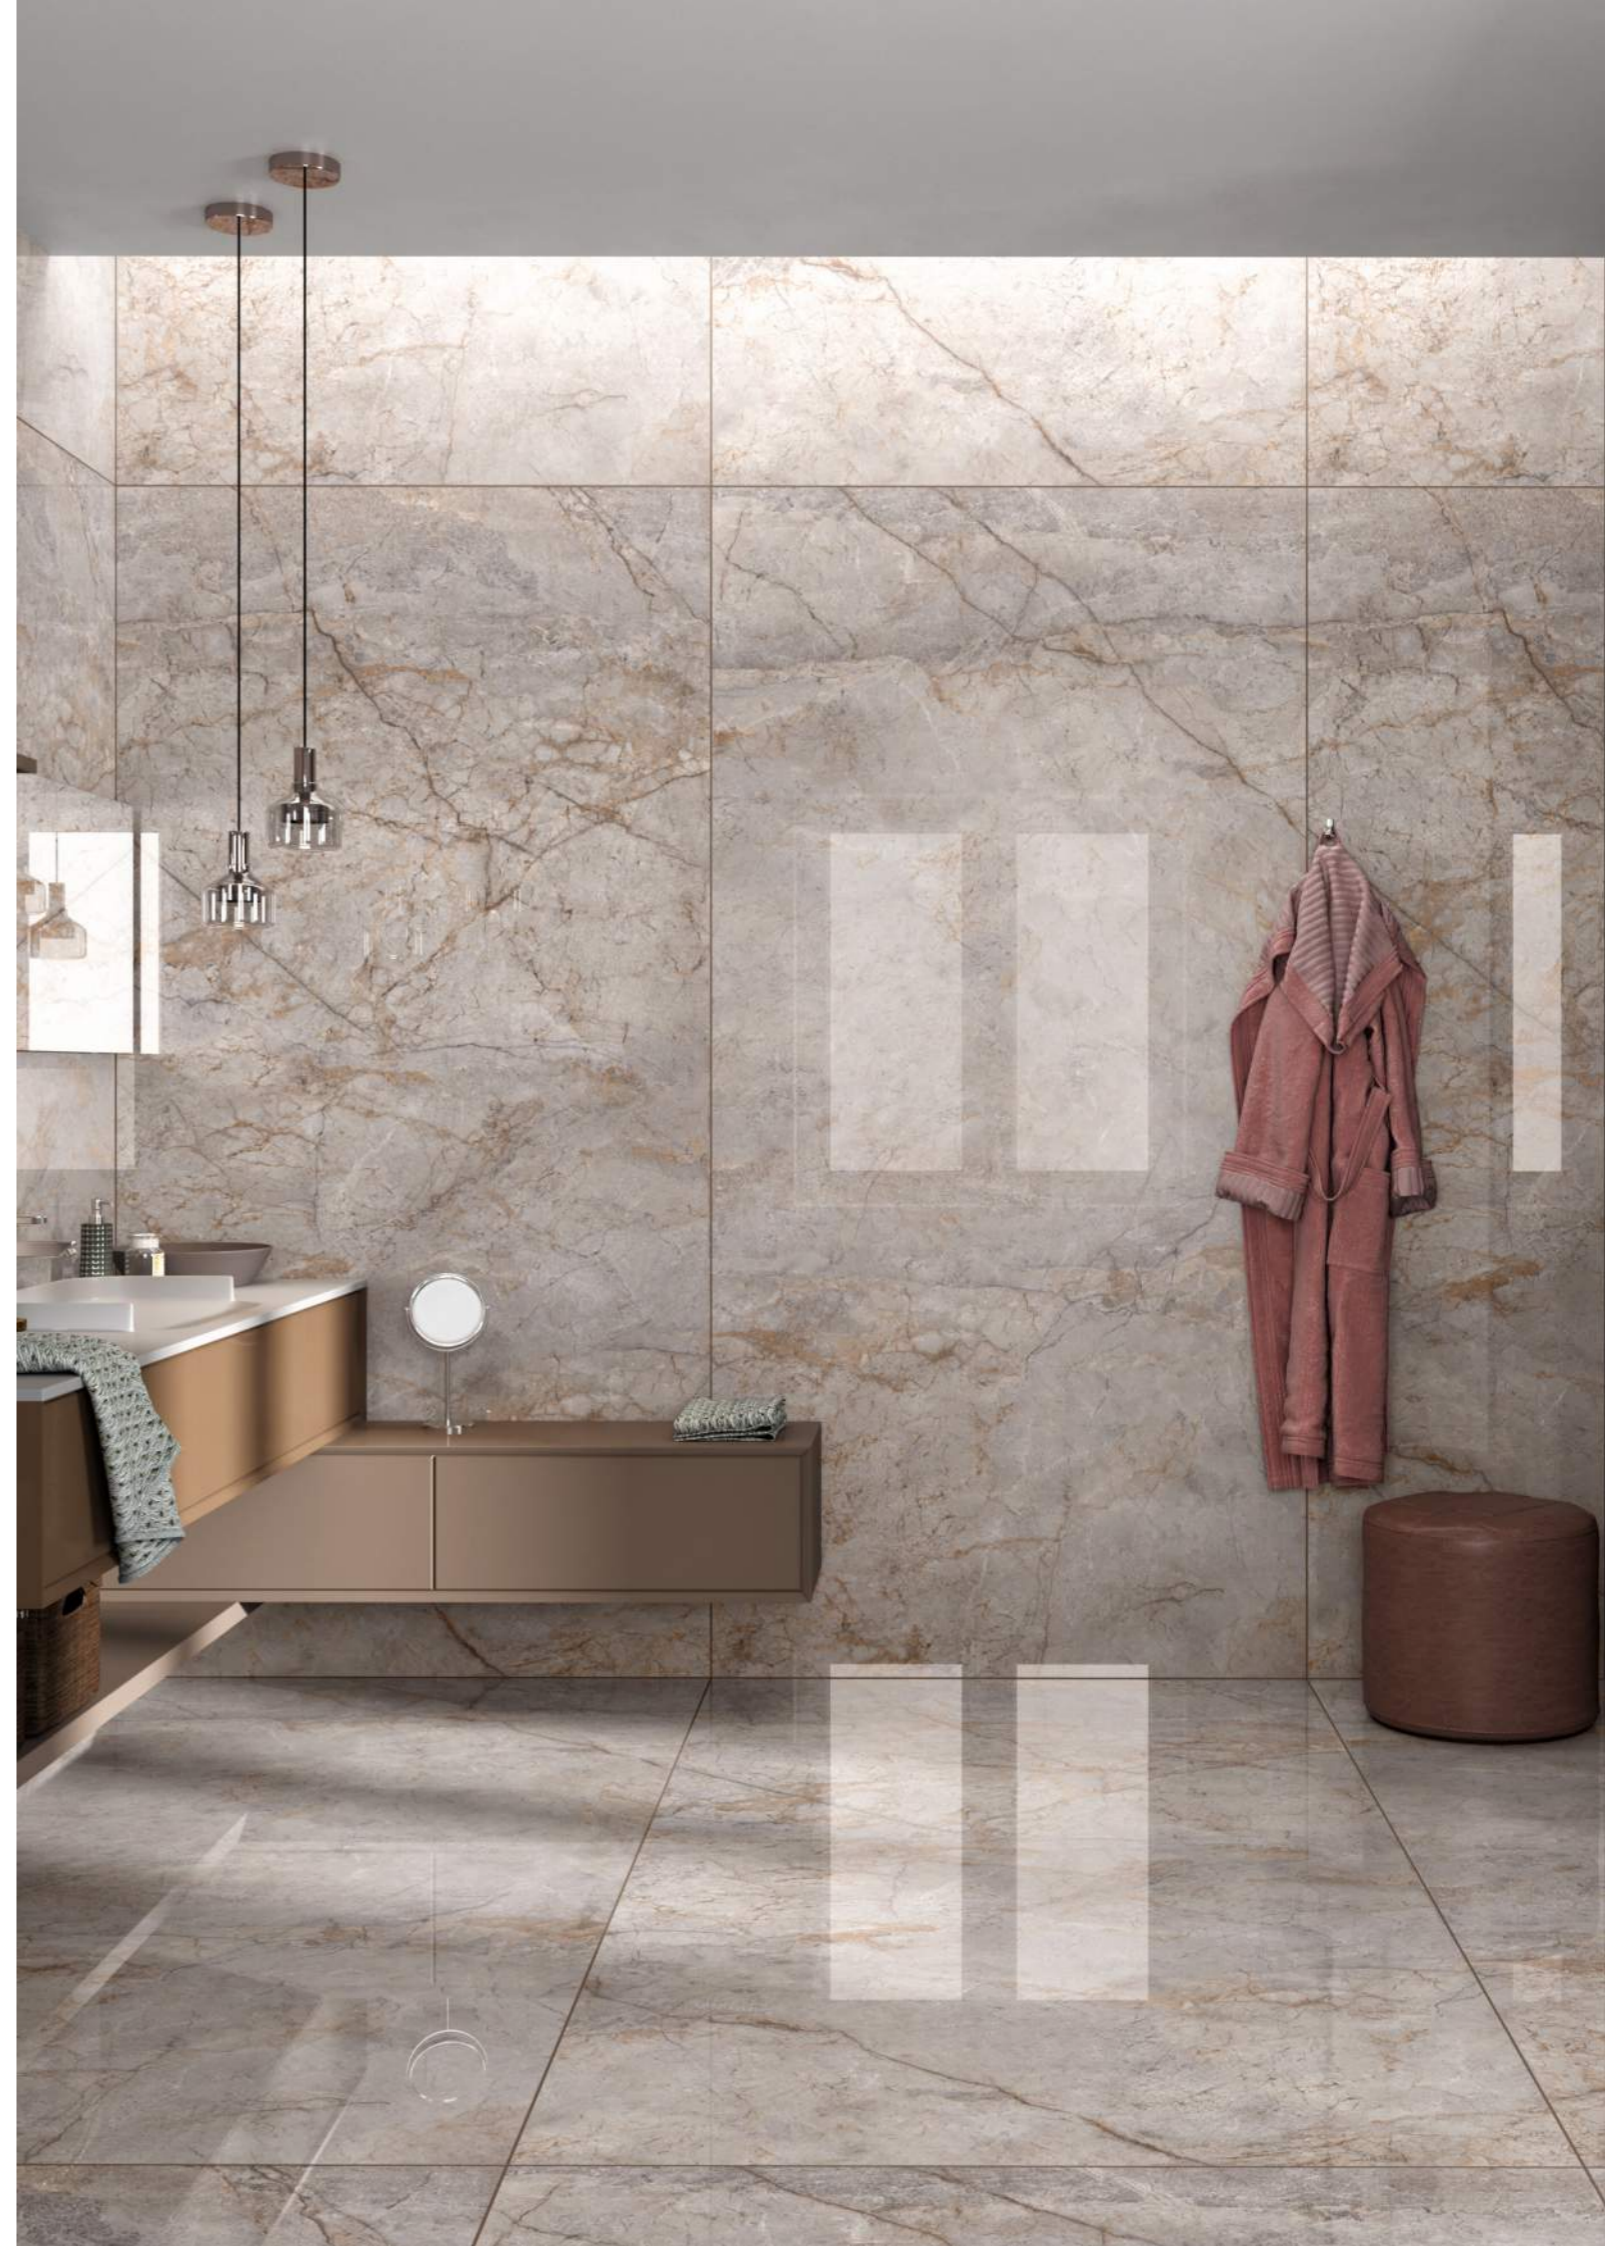

FUSION GREY

BRIGHT GLOSSY
FACE - 3


1200x2400mm

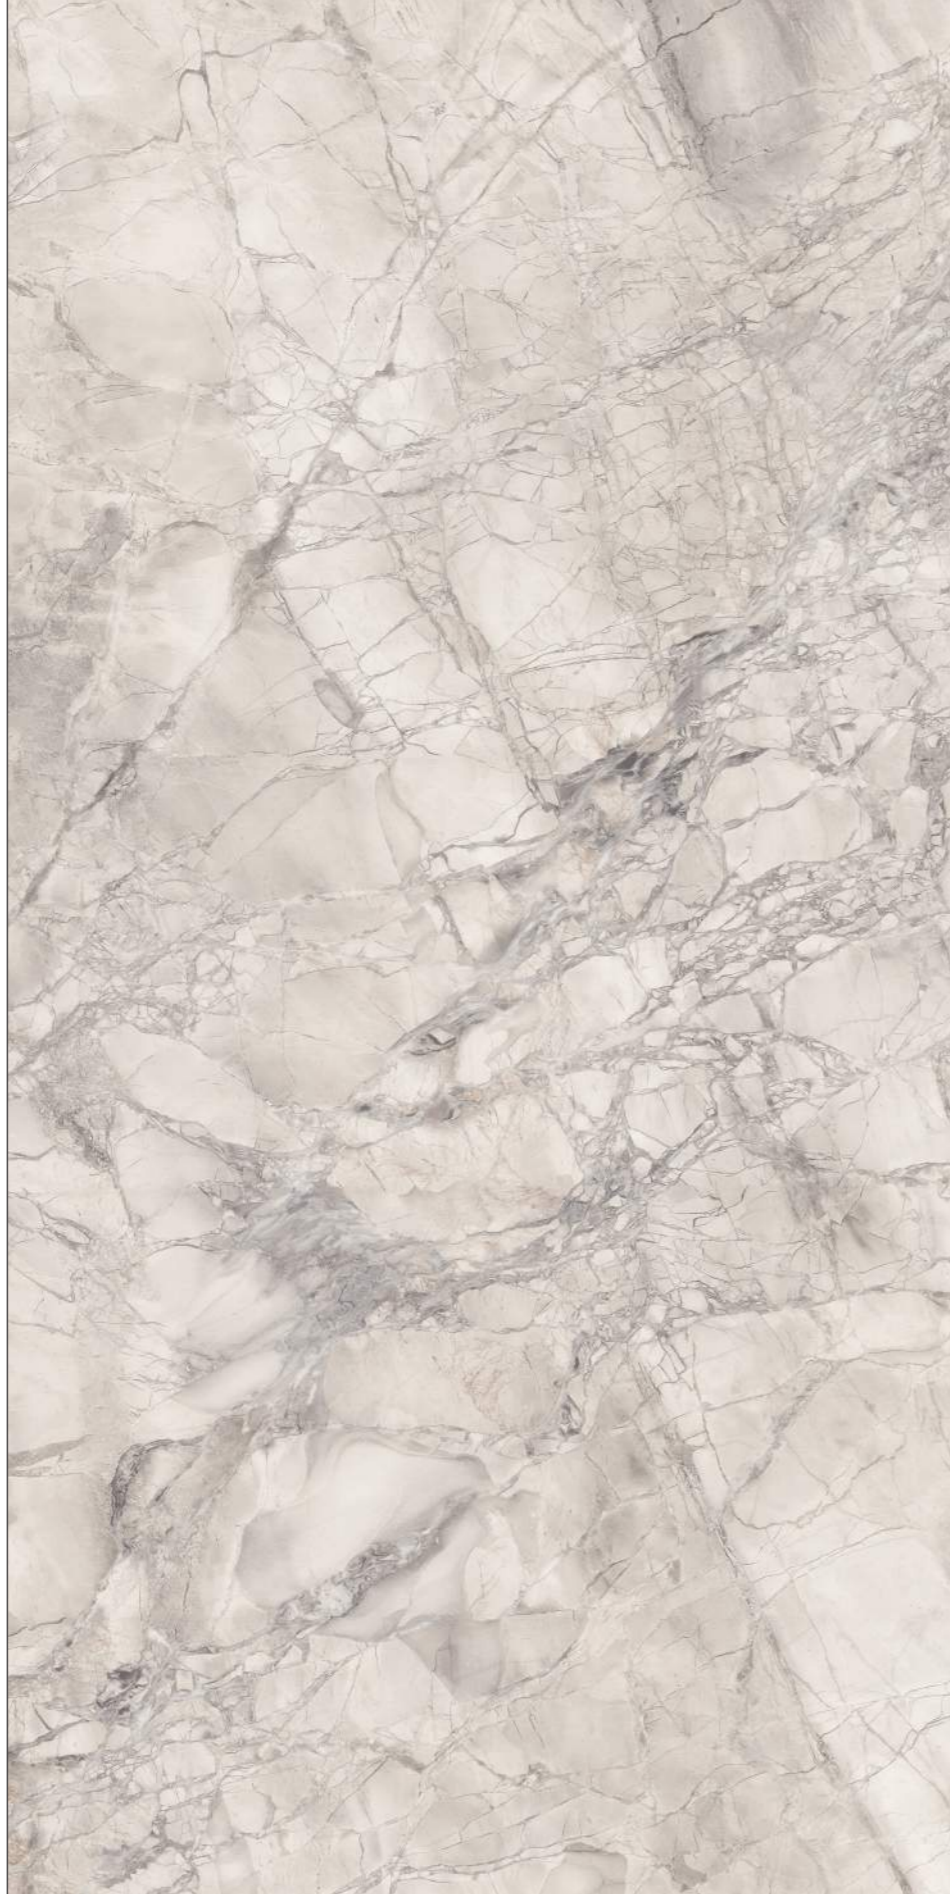

CALACATTA ELITE

CRYSTAL GLOSSY
FACE - A B (BOOK MATCH)

1200x2400mm

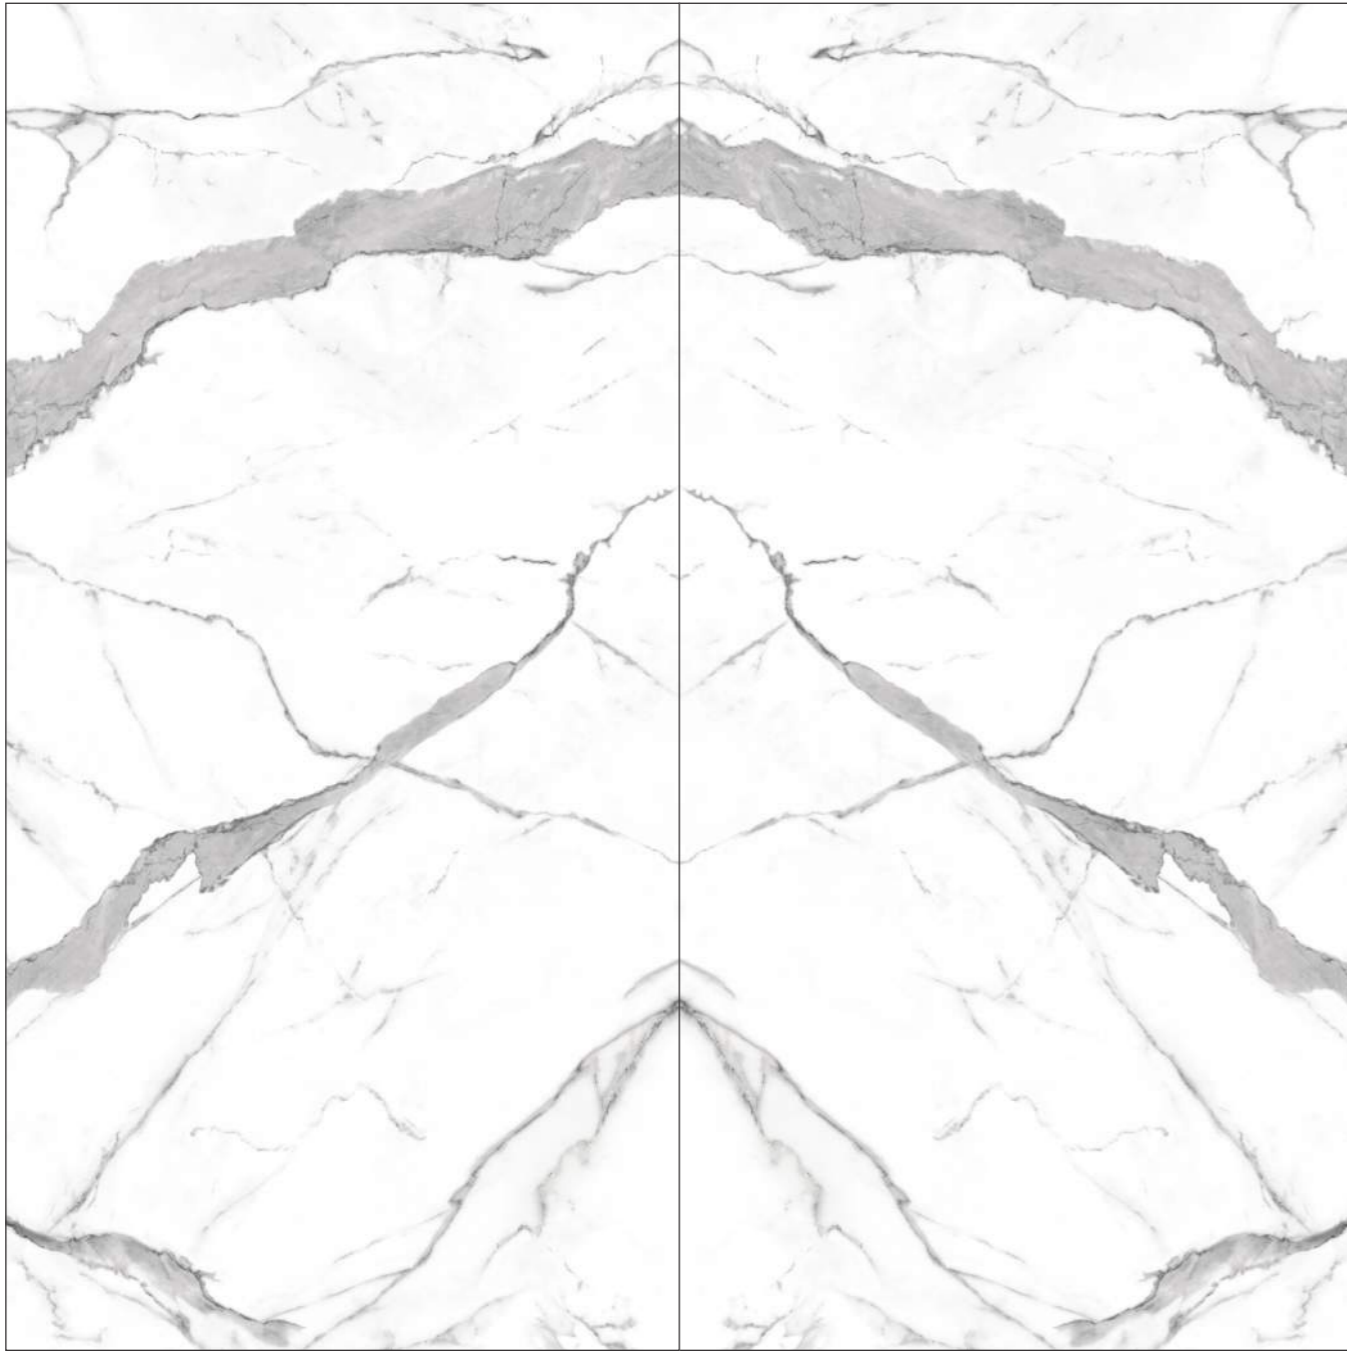

TAJ MAHAL

CRYSTAL GLOSSY
FACE - A B (BOOK MATCH)

1200x2400mm



BRECCIA BLUE

CRYSTAL GLOSSY
FACE - A B (BOOK MATCH)

1200x2400mm



SARAN COLLINS

CRYSTAL GLOSSY
FACE - A B (BOOK MATCH)



1200x2400mm



ARMANI BROWN

CRYSTAL GLOSSY
FACE - 4

1200x2400mm

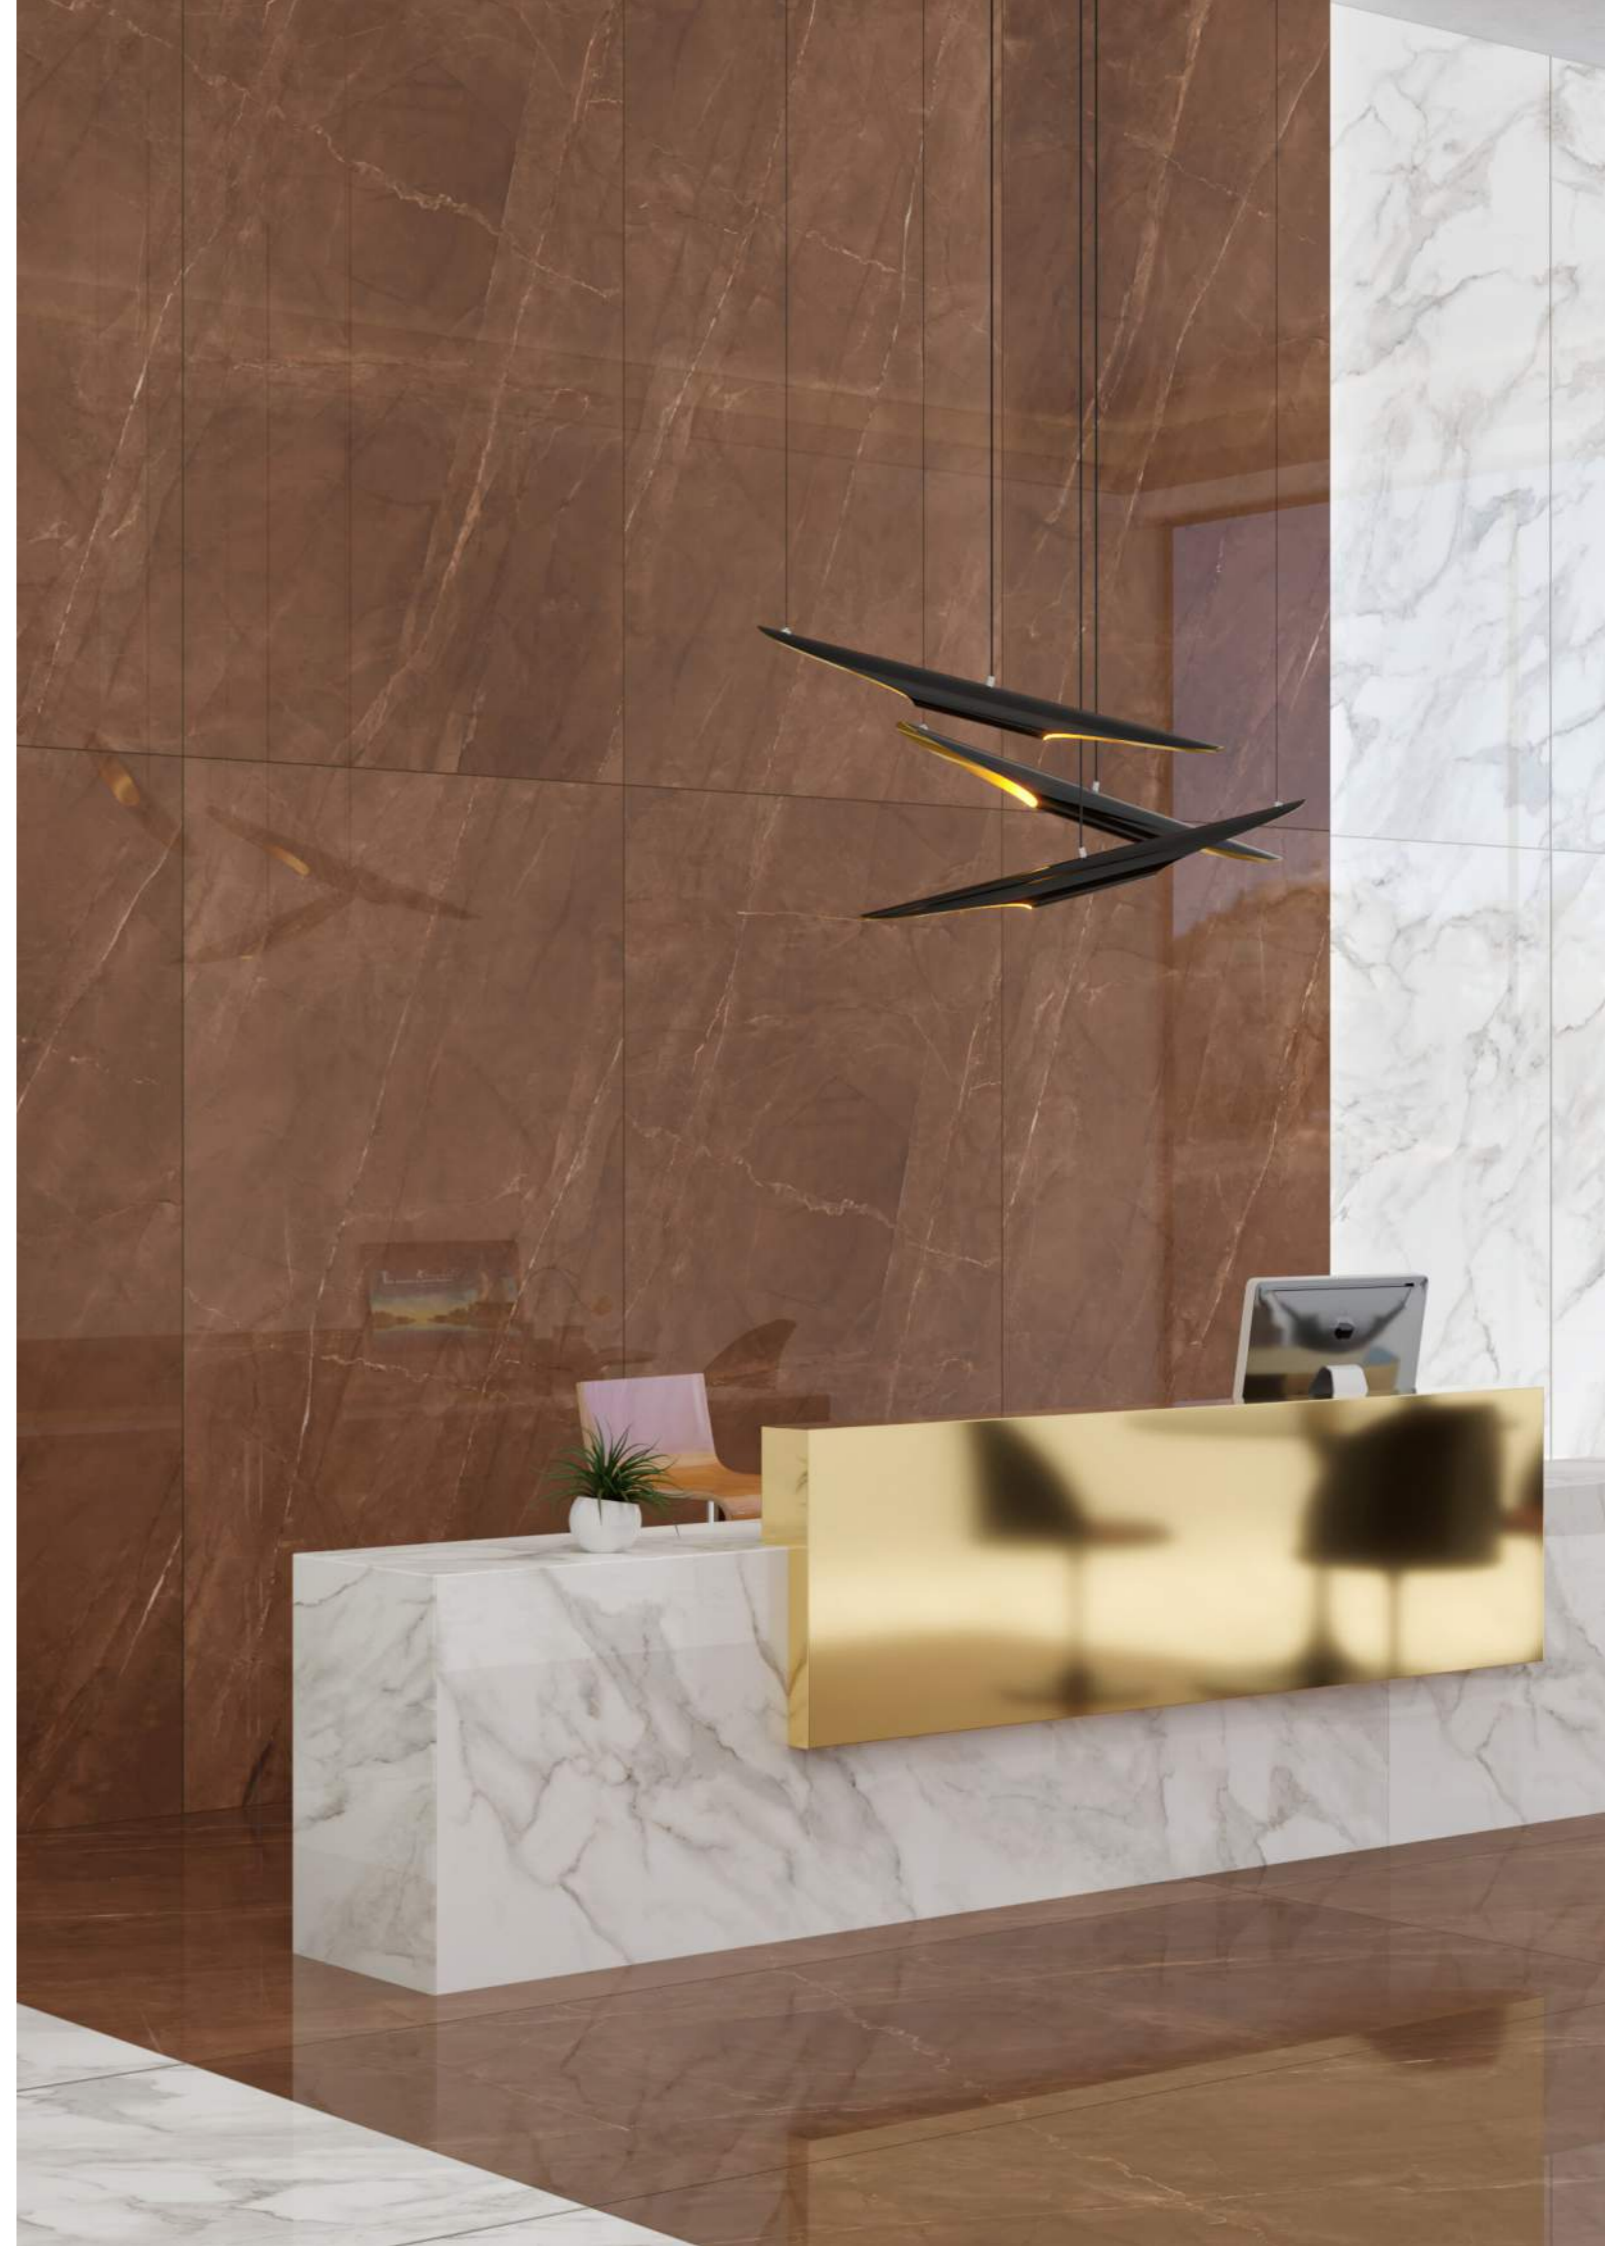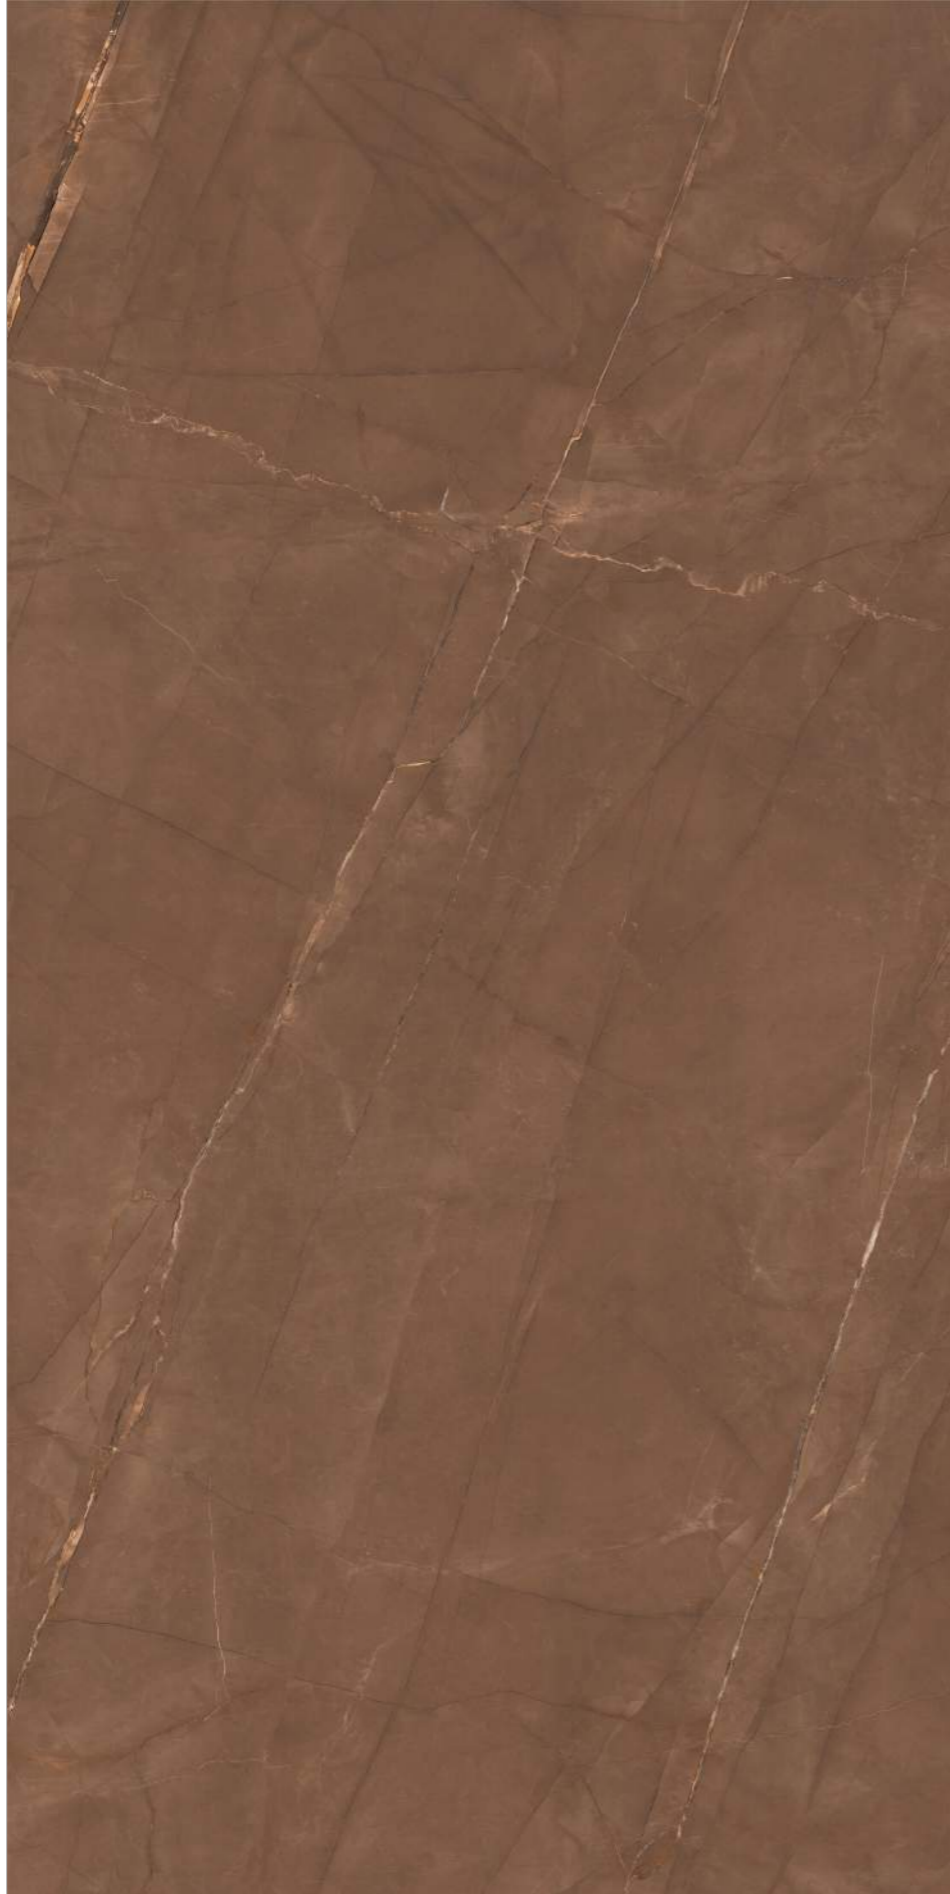

ASPEN NATURAL

CRYSTAL GLOSSY
FACE - 3


1200x2400mm



EXPLOSION BLACK

1200x2400mm

CRYSTAL GLOSSY
FACE - 3

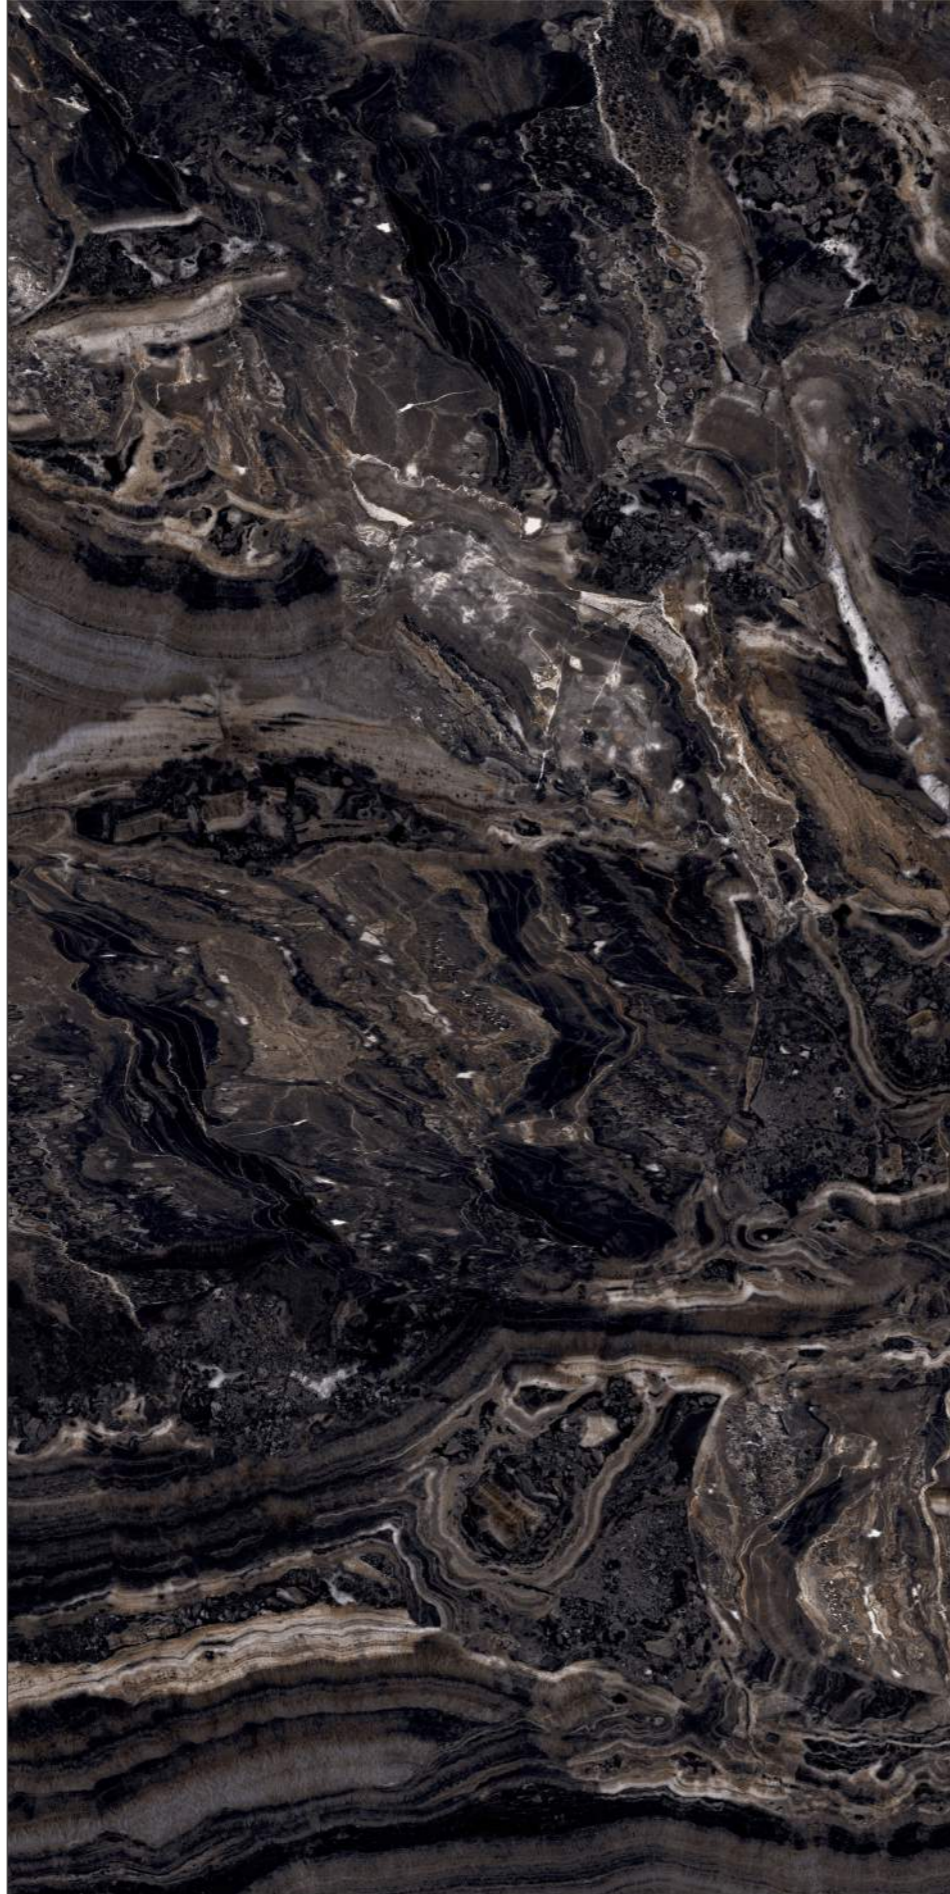

MYSTIQUE GREY

MATT & CARVING
FACE -2

1200x2400mm



KANKI GREY

MATT & CARVING
FACE -2

1200x2400mm



TOBACCO WHITE

MATT & CARVING
FACE -3


1200x2400mm



TOBACCO LIGHT GREY

1200x2400mm

MATT & CARVING
FACE -3

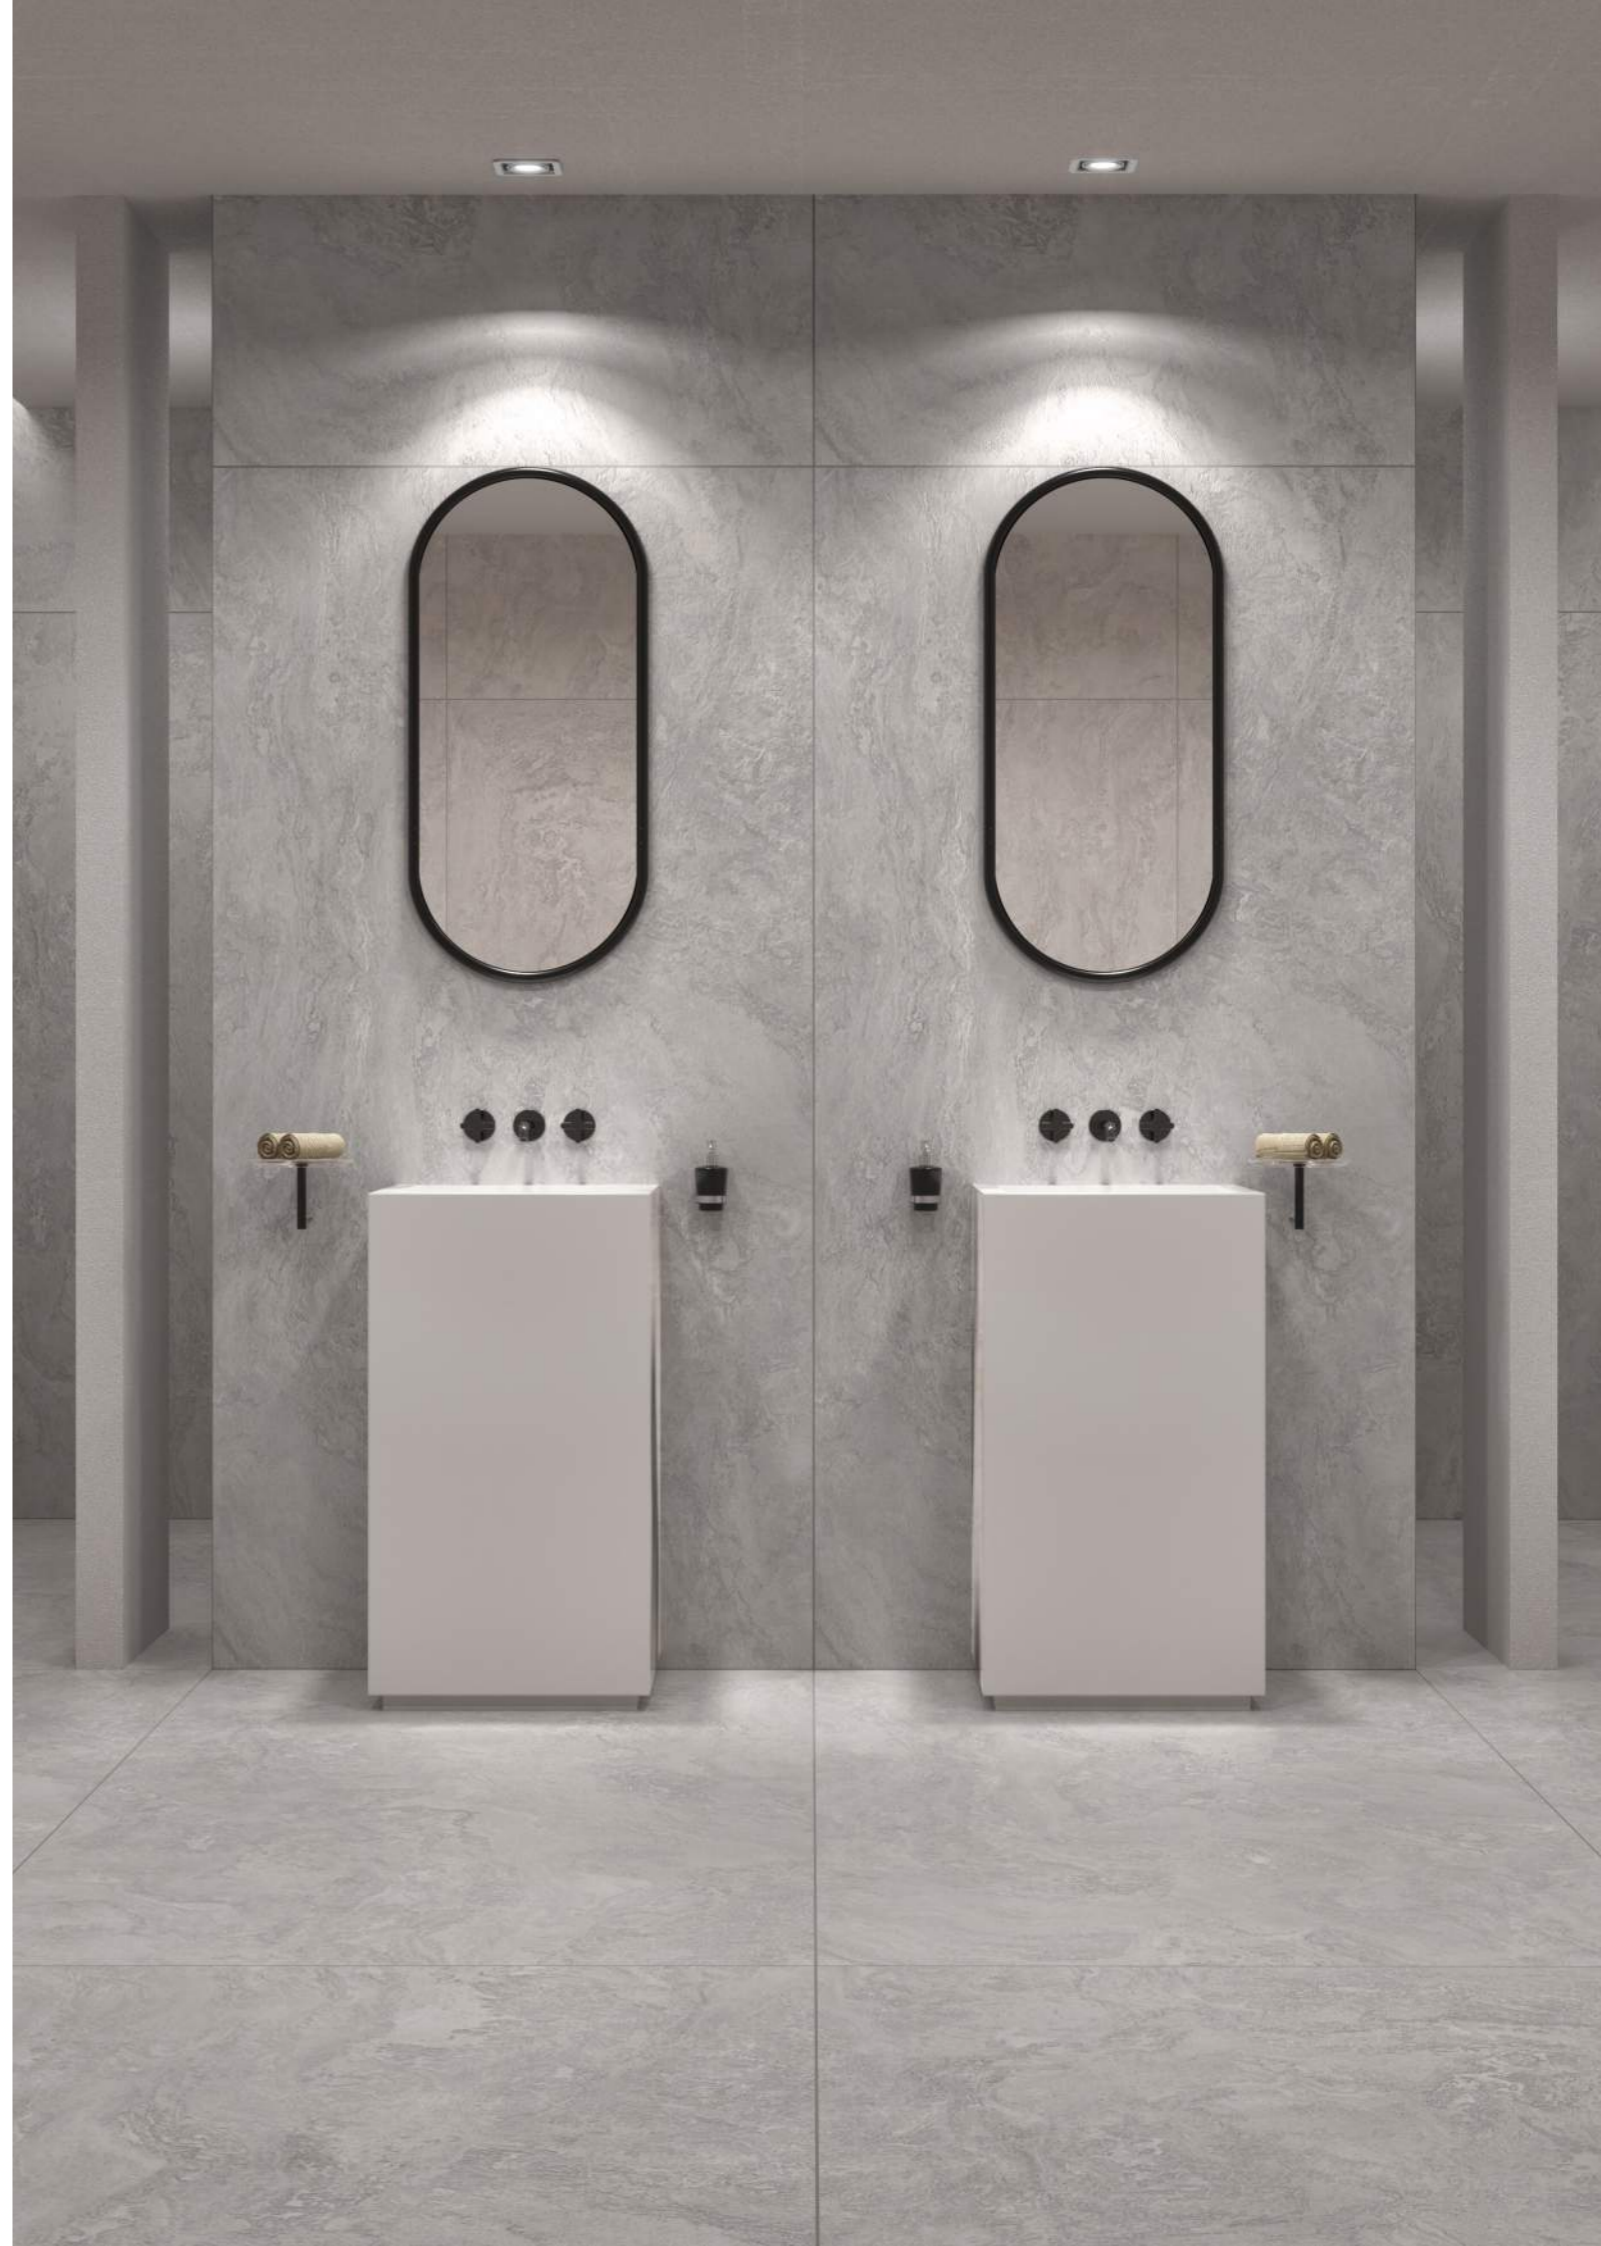

TOBACCO CREMA

MATT & CARVING
FACE -3

1200x2400mm



TOBACCO BROWN

MATT & CARVING
FACE -3

1200x2400mm



TECHNICAL SPECIFICATIONS:

Sr. No.	Characteristics	International Std. Iso 13006 / En 14411 Group B1a	Specification our tiles	Method Of Testing
Dimensions & Surface Quality				
1	Length	±0.6%	±0.1%	Iso 10545-2
2	Thickness	±5%	±3.0%	Iso 10545-2
3	Straightness Of Sides	±0.5%	±0.1%	Iso 10545-2
4	Rectangularity	±0.5%	±0.1%	Iso 10545-2
5	Surface Flatness	±0.5%	±0.1%	Iso 10545-2
6	Glossiness(Only For Polished Products)	Declared By Manufacturer	92~105%	Iso 2813(Gloss Meter)
7	Surface Quality	Min.95% Tiles Should Be Free From Defects	Min.98% Tiles Free From Defects	Iso 10545-2
Physical Characteristics				
8	Water Absorption	E≤ 0.5 %	≤ 0.05 %	Iso 10545-3
9	Moh's Hardness	≥ 6	≥ 6	Iso 10545 -3
10	Moisture Expansion	Nil	Nil	Iso 10545-10
11	Abrasion Resistance	Declared By Manufacturer	Pei 3~5(Depend On Product)	Iso 10545-7
Mechanical Characteristics				
12	Flexural Strength (MOR)	≥ 35 N/mm2 (350 Kg/cm2)	≥ 37 N/mm2 (370 Kg/cm2)	Iso 10545 -4
13	Breaking Strength	1300 Newton	2000 Newton	Iso 10545 -4
14	Impact Resistance	Declared By Manufacturer	No Indentation Or Cracking	Iso 10545 -5
Safety Characteristics				
15	Skid Resistance(Dynamic Friction Coefficient)	≥ 0.4	≥ 0.4	Iso 10545 -17
16	Density	≥ 2.0 Gm/cc	> 2.3 Gm/cc	Din 51082
Thermo Photo Characteristics				
17	Thermal Shock Resistance	Resistant To 10 Cycles	Pass Min10 Cycles	Iso 10545 -9
18	Frost Resistance	Frost Proof	Need To Comply With The Standard	Iso 10545 - 12
19	Coefficient Of Linearthermal Expansion,	9x10-6 K -1	< 5.86x10-6 K -1	Iso 10545-8
20	Color Resistance To Uv Light	Resistant	Resistant	Iso 10545 -16
Chemical Characteristics				
1	Chemical Resistance : House Hold Chemicals & Swimming Pool Salts	Min Class- Gb	Confirm To Classes-ga	Iso 10545 -13
2	Chemical Resistance : Low Concentrations Acids & Alkalis	Min Class- Glb	Confirm To Classes-gla	Iso 10545 -13
3	Chemical Resistance : High Concentrations Acids & Alkalis	Min Class- Ghb	Confirm To Classes-gha	Iso 10545 -13
4	Stain Resistance	Min Class-3	Min Confirm To Class -4	Iso 10545 -14

PACKAGING INFO.:

Dimension (mm)	Slab	Square Metre	Weight (Approx)
800 x 1600 mm	2	2.56	54 kgs
800 x 2400 mm	2	3.84	80 kgs
1200 x 1200 mm	2	2.88	60 kgs
1200 x 2400 mm	1	2.88	60 kgs

