



# 2500EA

Slotvent

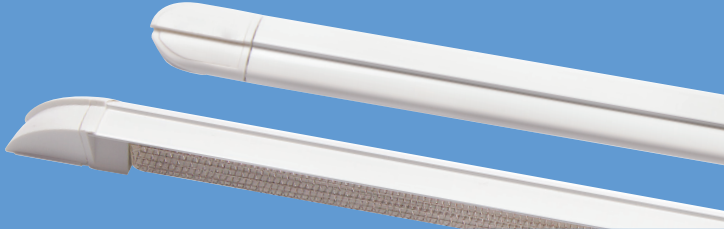

## Physical specification

All measurements in millimetres unless otherwise indicated

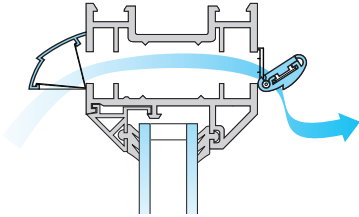

**2500EA**

## Features and benefits

- Smallest 2500mm<sup>2</sup> equivalent area vent on the market – just 250mm long
- Easy to apply 13mm rout for installation on window profile
- Suitable for use where a high level of equivalent area is required and to achieve the minimum room requirements under Building Regulations (min 2500mm<sup>2</sup> ea per non-habitable room)
- Manufactured from aluminium alloy
- Excellent air tightness performance, increasingly important with dwelling air pressure tests
- Aesthetically pleasing design – unobtrusive when installed

## Configurations

### 2500EAW-IO

Internal unit only (White only)

### 2500EA

Complete unit with front control

## Models, control options and key data

Product Code	Equivalent area (mm <sup>2</sup> )	Slot height (mm)	Slot size (mm) Length	Air Permeability		Watertightness		Airborne Sound Insulation
				@ 50 Pa (m <sup>2</sup> /hr)	@ 50 Pa (l/s)	Pressure @ no leakage (Pa)	Classification	Dn,e,w (dB) Open
2500EAW-IO *	–	13	192	–	–	–	–	–
2500EA *	2500	13	192	0.61	0.17	900	E900	36

Colours available W

\* Pricing is variable depending on quantity ordered - please call for details

## Example order:

**2500EA** + colour option White = **2500EAW**