


HIGHLIGHT-GLS

DESIGN FABRIZIO CRISA

100x57 cm
Duct-out/Re-circulating
Re-circulating kit available
White glass + white frame


The exclusive H16 solution for false ceilings with lower heights has been designed to maintain the excellent extraction properties with low noise levels. The brightness and tone of the light strips can be controlled by a wall-mounted switch or remote control and any commercially available light can be connected.

H16 - NO MOTOR VERSION

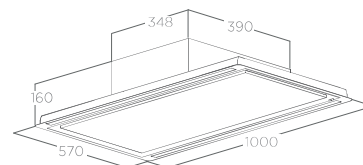

FALSE CEILING CUT: 550X980

H30 VERSION

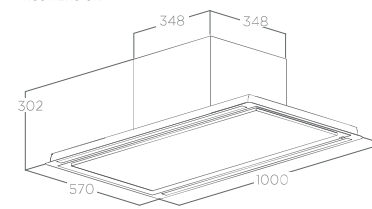

FALSE CEILING CUT: 550X980



LIGHTING

Type	Strip LED 2 x 14 W
Intensity	563 lux
Temperature	2700-5000 K

SPECIFICATION

	H16	H30
Controls	Remote control	Remote control
Speeds	3 speeds + 2 boost levels	3 speeds + 2 boost levels
Maximum boost airflow	720 m ³ /h	790 m ³ /h
Noise level	69 dBA	53 dBA
Total power absorption	293 W	188 W
Energy class	A (remote motor B)	A
Duct size	222 x 89 mm (int)	150 mm
Aluminium grease filter	Included	Included
Remote control	Included	Included

OPTIONAL ACCESSORIES

Recycling kit H16	KIT0148450A
Recycling kit H30	KIT0148449
Internal remote motor	KIT0147879
Wall external motor	KIT0147880
Roof external motor	KIT0147881
Inclined Roof external motor	KIT0147882
Dimmer kit	KIT0147878

MODELS

HIGHLIGHT-GLS Remote motor white glass	PRF0146248
HIGHLIGHT-GLS H30 White glass	PRF0146246A
HIGHLIGHT-GLS H16 White glass	PRF0167044A

For remote motors specification see page 180

** with optional recirculating kit see page 119