



## LULLABY

DESIGN FABRIZIO CRISA




120x65 cm


Duct-out/Re-circulating  
White lacquered wood with stainless steel, Natural oak with white soft touch effect

The recirculating models can be installed without the false ceiling. The central full LED light panel is surrounded by a natural oak frame or white lacquered frame. Matching extension shelves are available as accessories and any type of commercially available light can also be connected.

DUCT-OUT VERSION

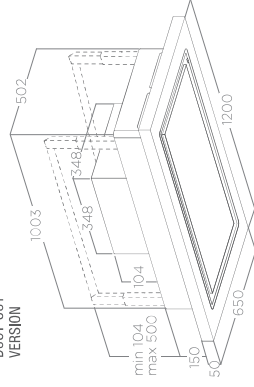

RE-CIRCULATING VERSION

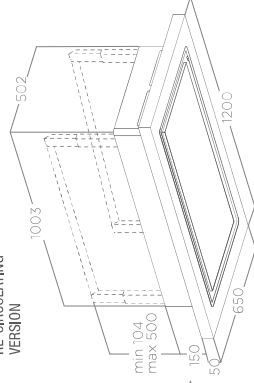

FALSE CEILING NEEDED  
CUT: 470X360



### LIGHTING

Type	LED panel 28 W
Intensity	1683 lux
Temperature	2700 - 5000 K

### OPTIONAL ACCESSORIES

Shelf kits	See page 118
Lighting accessories	See page 118
Dimmer kit	KIT0147878

### SPECIFICATION

Controls	Remote control	
	3 speeds + 2 boost levels	
Maximum boost airflow	Duct-out	Re-circulating
	770 m <sup>3</sup> /h	483 m <sup>3</sup> /h
	53 dBA	64 dBA
Total power absorption	188W	214W
	Energy class	A
Duct size	150mm	Included
Aluminium grease filter	Included	Included
Revolucion filter	-	Included
Remote control	Included	Included

### MODELS

LULLABY White wood duct-out	PRF0146227
LULLABY White wood re-circulating	PRF0146226
LULLABY Natural wood duct-out	PRF0146229
LULLABY Natural wood re-circulating	PRF0146225
LULLABY @ Natural wood duct out version	PRF0167046
LULLABY @ Natural wood re-circulating version	PRF0167047
LULLABY @ White wood duct out version	PRF0167048
LULLABY @ White wood re-circulating version	PRF0167049

Model not subject to compulsory energy certification. (\*)

\*\* with optional recirculating kit see page 119

\* LULLABY @ versions with Wifi connectivity available Autumn 2021