


Elite150

Axial flow kitchen fan



Features and benefits

- Installation for windows and walls only, not suitable for ceiling mounting
- High quality electronically operated shutter design helping reduce unnecessary heat loss when the fan is off and enhance privacy and security in low level installations
- Top or back cable entry for simple cost effective installation
- Modern styling for discreet finish
- Axial impellor flat surface design that does not clog easily helping to maintain installed performance
- Window kits on page 50

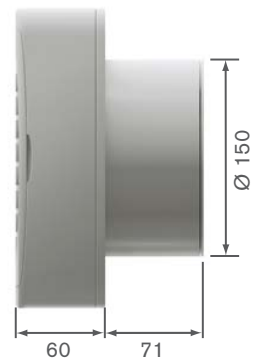

Models, control options and key data

*Sound pressure level measured @ 3 metres

Product code	Control operation	Voltage	IP	Performance		Sound pressure dB(A)*	Price ex. VAT (£)
				m ³ /h	l/s		
EL150PC	Single speed with pullcord	230	X4	266	73	44	£76.36
EL150HTR	Single speed with humidistat/timer & remote operation	230	X4	266	73	44	£115.86

Physical specification

All measurements in millimetres unless otherwise indicated

Weight: 0.98kg

Materials: White satin finish
ABS Plastic

- Ancillaries for Elite 150**
- EW150 page 50
 - ED150 Easyfix page 48
 - Flexiduct page 48
 - EG2 page 48
 - GG84 page 49

Installation

Wiring: Must comply with IEE Regulations

Cable: Ø 1mm² max

Fuse: 3 amp normally required (when fan is supplied from a 6A lighting circuit no local fuse is required)

Exhaust: Ø 150mm

Glazing hole: Ø 167mm, 4–28mm double glazing

Electrical specification: 230V–50Hz Class II

Consumption: 25W – EL150 range
26W – EL150HTR

Performance

