


# Select 150

## Axial flow kitchen fan



### Features and benefits

- Suitable for wall installation only. Built in guide vanes to improve installed airflow performance
- ø150mm axial impellor design has flat surfaces that do not clog easily reducing impact any dirt or particles have on fan performance
- Includes anti-backdraught shutters to help reduce heat loss when not in operation
- Clever spigot strengtheners to prevent crushing when attaching flexible ducting
- Classic styling for all modern interiors and easy to wipe clean as necessary

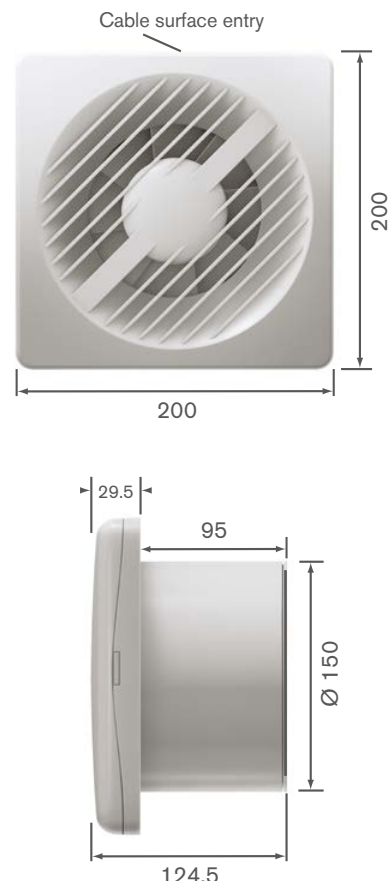

### Models, control options and key data

\*Sound pressure level measured @ 3 metres

Product code	Control operation	Voltage	IP	Performance				Sound pressure dB(A)*	Price ex. VAT (£)
				Normal		Slow			
				m <sup>3</sup> /h	l/s	m <sup>3</sup> /h	l/s		
<b>AXSK</b>	Single speed with pullcord	230	X2	250	70	-	-	43	<b>£54.51</b>
<b>AXSKMA</b>	Dual speed with humidistat/timer & pullcord	230	X2	250	70	133	37	43	<b>£133.21</b>

### Physical specification

All measurements in millimetres unless otherwise indicated

**Weight:** 0.99kg

**Materials:** White satin finish  
ABS Plastic

#### Ancillaries for Select 150

EG2 page 49 • ED150 Easyfix page 48

- Flexiduct page 48

### Installation

**Wiring:** Must comply with IEE Regulations

**Cable:** Ø 1mm<sup>2</sup> max

**Fuse:** 3 amp normally required (when fan is supplied from a 6A lighting circuit no local fuse is required)

**Exhaust:** Ø 150mm

**Electrical specification:** 230V ~ 50Hz Class II

**Consumption:** 29W  
15W – AXSKMA (slow)

### Performance

