


# Silent Bathroom Fan

Bathroom fan



## Features and benefits

- $\varnothing$  100mm axial flow fans suitable for wall or window applications. Ceiling mounting with discharge via external wall or soffit incorporating one 90° bend. NOT suitable for vertical duct installations via a roof tile vent or similar
- Designed to offer discreet performance in the bathroom - up to 70% quieter than standard axial fans when operating if installed in a "through the wall installation"
- Basic and timer control options
- Low profile design for wall mounting
- Long life, ball bearing motor

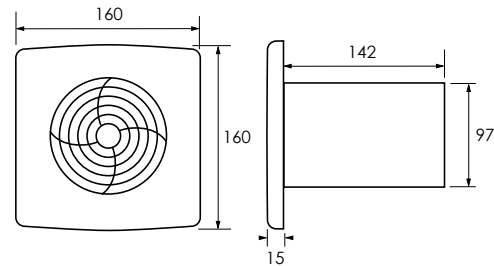

## Models, control options and key data

\*Sound pressure level measured @ 3 metres

Product code	Control operation	Voltage	IP	Performance in free air		Sound pressure dB(A)*	Price ex. VAT (£)
				m <sup>3</sup> /h	l/s		
SR100	Basic fan. Remote operation. Single speed	230	X4	95	26	26.7	£44.72
SR100TR	Timer fan. Remote operation. Single speed	230	X4	95	26	26.7	£53.38
SR100HTR	Humidistat fan. Remote operation. Single speed	230	X4	95	26	26.7	£72.30

### Physical specification

All measurements in millimetres unless otherwise indicated

**Weight:** 0.63kg

**Materials:** ABS plastic


### Installation

**Cable:** 2 core  $\varnothing$  1mm<sup>2</sup> max  
3 core  $\varnothing$  1/1.5mm<sup>2</sup> max

**Electrical specification:** 230V~50Hz Class II

**Consumption:** 100mm fan – 13W

### Performance

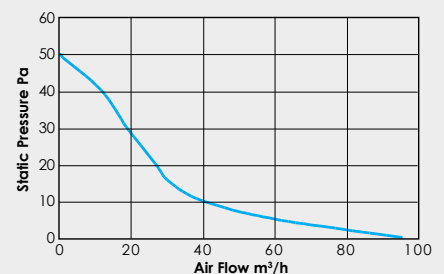

#### Ancillaries for Silent Wall Fan

ED1 Easyfix page 48 • FF100 Fastfix page 48  
• EG1 page 49