


Silent Induct Fans and Shower Kits

Single speed silent shower fan



Features and benefits

- \varnothing 100mm axial flow fans suitable for Ceiling mounting with discharge via external wall or soffit incorporating one 90° bend. NOT suitable for vertical duct installations via a roof tile vent or similar.
- Shower kits – with or without 12V light
- Designed to offer discreet performance in the bathroom - up to 70% quieter than standard axial fans when operating
- Available as individual inline fan or as complete shower kit
- Basic and timer control options

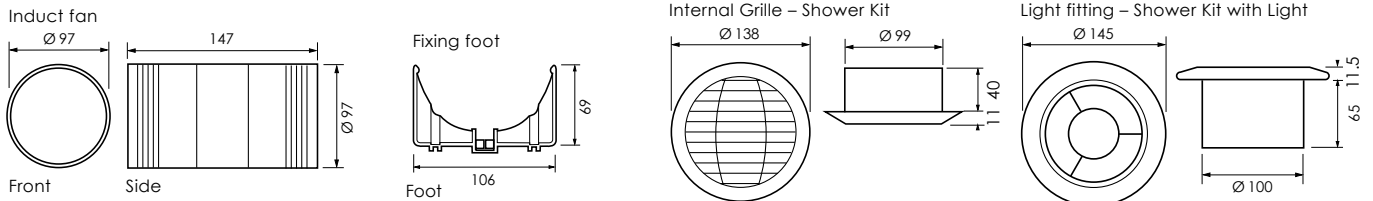

Models, control options and key data

*Sound pressure level measured @ 3 metres [†]Installed performance with 3 metres of flexiduct

Product code	Control operation	Voltage	IP	Performance in free air		Sound pressure dB(A)*	Price ex. VAT (£)
				m ³ /h	l/s		
SRD100	Basic induct fan. Single speed	230	X4	110	31	20	£43.54
SRD100T	Timer induct fan. Single speed	230	X4	110	31	20	£51.75
SR100BSK [†]	Basic shower kit. Single speed	230	X4	55	15	24	£63.06
SR100TSK [†]	Timer shower kit. Single speed	230	X4	55	15	24	£83.00
SR100LTSK [†]	Timer shower kit & light. Single speed	230	X4	55	15	24	£103.13

Physical specification

All measurements in millimetres unless otherwise indicated

Weight: Induct Fan – 0.61kg
Shower Kit – 1.3kg
Shower Kit & Light fitting – 1.7kg

Material: ABS plastic

Ancillaries for Silent Induct Fans and Shower Kits
GG42 page 49 • GFP4.3 page 49

Installation

Cable: 2 core \varnothing 1mm² max
3 core \varnothing 1/1.5mm² max

Electrical specification: 230V-50Hz Class II

Consumption: 16W – fan
20W – light

Performance

