

Circular duct

SR



Description


Circular duct.

Ducts are always produced locally and can therefore have different thicknesses and other specifications per country.

The ducts can be produced both with and without click function (notches).

Please specify when ordering.

Dimensions

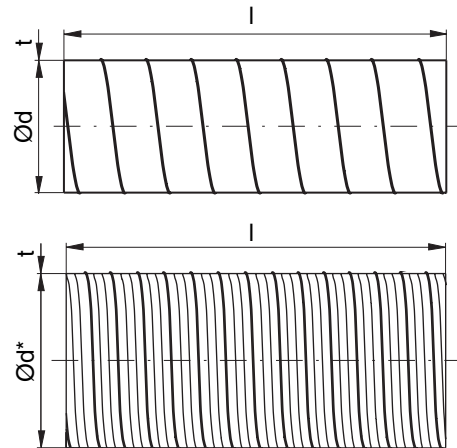

Ød std nom	O πd m	A $\pi d^2/4$ m ²	t std [mm]	l std [mm]	ml std kg/m
63	0,198	0,003	0,5	3000	0,89
80	0,251	0,005	0,45	3000	0,91
100	0,314	0,008	0,45	3000	1,14
112	0,352	0,010	0,45	3000	1,28
125	0,393	0,012	0,45	3000	1,41
140	0,440	0,015	0,5	3000	1,76
150	0,471	0,018	0,5	3000	1,89
160	0,503	0,020	0,5	3000	2,02
180	0,565	0,025	0,5	3000	2,26
200	0,628	0,031	0,5	3000	2,56
224	0,704	0,039	0,5	3000	2,87
250 *	0,785	0,049	0,5	3000	3,18
280 *	0,880	0,062	0,55	3000	3,92
300 *	0,942	0,071	0,55	3000	4,20
315 *	0,990	0,078	0,55	3000	4,41
355 *	1,115	0,099	0,55	3000	4,96
400 *	1,257	0,126	0,55	3000	6,01
450 *	1,414	0,159	0,6	3000	7,37
500 *	1,571	0,196	0,7	3000	9,54
560 *	1,759	0,246	0,7	3000	10,7
600 *	1,885	0,283	0,7	3000	11,4
630 *	1,979	0,312	0,7	3000	12,0
710 *	2,231	0,396	0,8	3000	15,5
800 *	2,513	0,503	0,8	3000	17,4
900 *	2,827	0,636	0,9	3000	21,7
1000 *	3,142	0,785	0,9	3000	24,1
1120 *	3,519	0,985	0,9	3000	27,0
1250 *	3,927	1,227	0,9	3000	30,2
1400 *	4,398	1,539	1,25	2400	48,0
1500 *	4,712	1,767	1,25	2400	51,4
1600 *	5,027	2,011	1,25	2400	54,8

* With outturned stiffening corrugation.

Ordering example


	SR	200	3000	CLIC
Product				
Dimension Ød				
Length l				
Type				



Circular duct

SR

Technical data

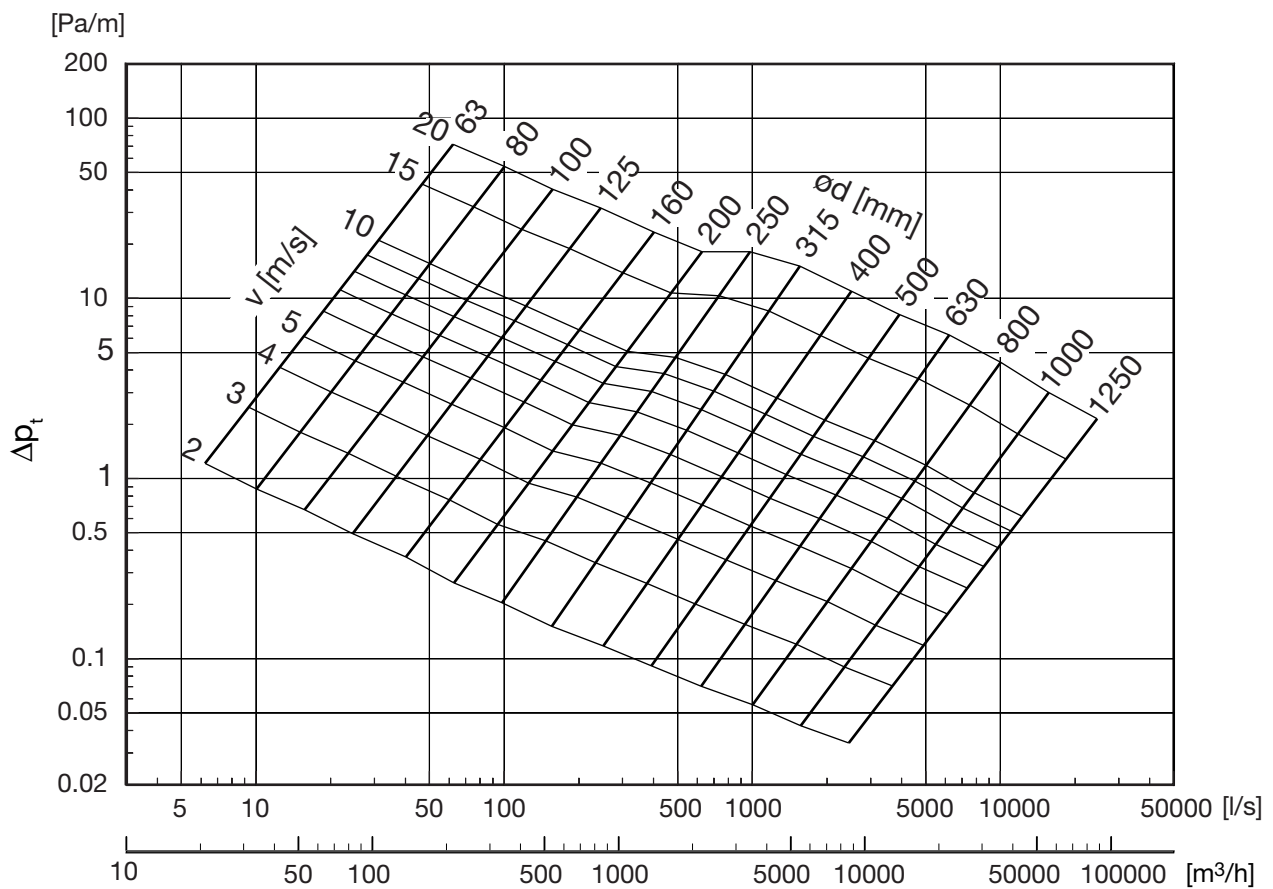

q

Special versions

We can supply ducts with the following special designs:

- In intermediate dimensions, see general information
- Extra tight, with nitrile rubber seal in the fold
- In other sheet metal thicknesses

Extra tight, with fold seal

When extremely good sealing is required in the spiral fold, the ducts can also be supplied with a special rubber seal in the fold.

This seal is very effective at stopping leakage of vegetable oils and greases, and most petroleum products including white spirit.

Other sheet metal thicknesses

If extra stability is needed in ducts, because of high negative pressure etc., they can be supplied with thicker sheet metal than standard. Remember that the thickness increase always reduces the inner diameter. Fittings for such special ducts must be specified separately and sometimes have to be made specially.

Reinforcement corrugations

Ducts of Ø250 mm and above are normally given stiffening corrugations to increase radial stiffness.



Circular duct

SR

Technical data

Strength

Positive pressure

In case of high positive pressure, the rubber gaskets lips will first start to whistle. At considerably higher pressure, the joints between the ducts will be forced apart. If you manage to fix the connections very well, the ducts will burst at their folds at even higher pressure. The high pressures needed for this to happen are not relevant to ventilation installations.

Negative pressure


In installations with high negative pressure, there is a risk that the ducts could collapse.

This phenomenon is referred to as buckling, and can suddenly happen at the weakest point in the system. Buckling wanders along the duct, which can be completely flattened. The weakest point is frequently a "transport dent" on a duct. For this reason, only use undamaged ducts in systems which are close to the critical pressure!

Strength and leakage

The performance of the gasket ability for tightness is different from the pressure limits and is shown in the table below.

In exceptional cases, additional strong ducts and fittings are needed. Lindab has developed a system that can withstand down to 5000 Pascal's negative pressure. To minimize costs and to be sure of the performance of the specific system, contact Lindab for precise dimensioning.

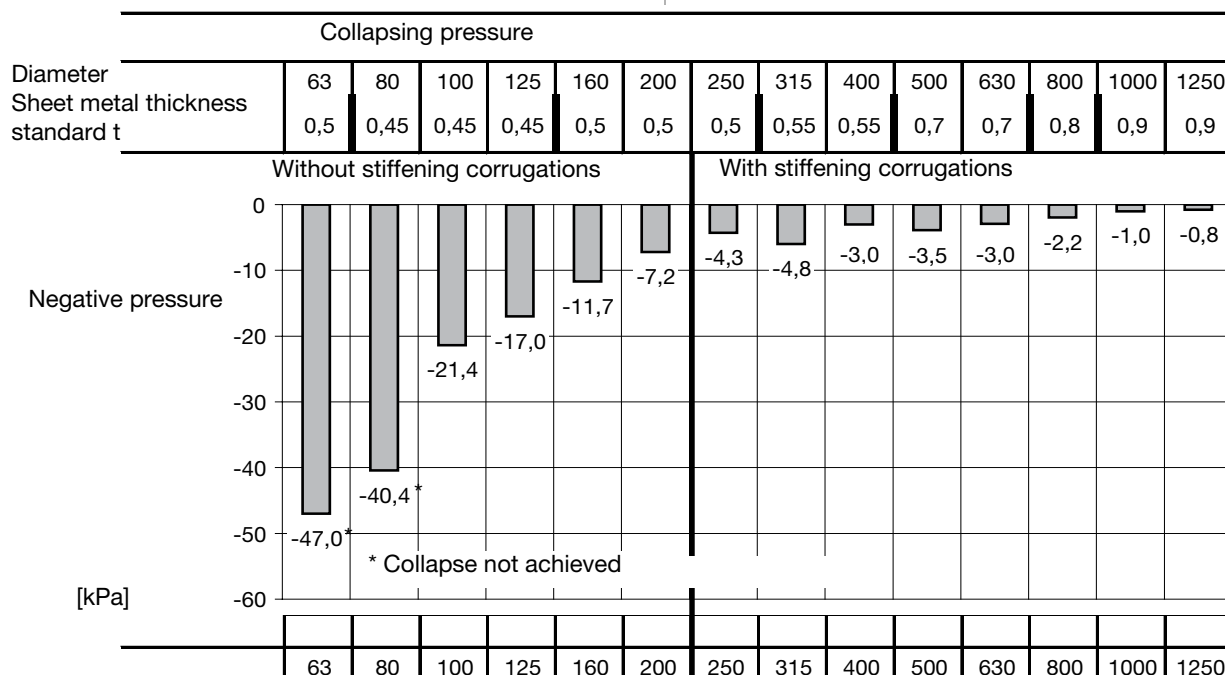

	Min Dim [nom]	Max Dim [nom]	Max Negative pressure [Pa]	Max Positive pressure [Pa]
Safe Gasket stability	63	1600	-5000	3000
Duct system Eurovent certified	63	315	-5000	2000
Duct system Eurovent certified	400	1250	-750	2000
Duct system according to EN 12237	63	1250	-750	2000
Duct system - Strong solution on request	63	1600	-5000	3000

