



## Revive Quick Start Guide

With the fan powered up; upon removing the cover the display will automatically activate. It will first display the data logger function, to enter commissioning mode the MODE button needs to be pressed for 6 seconds.


### Button Functions Example

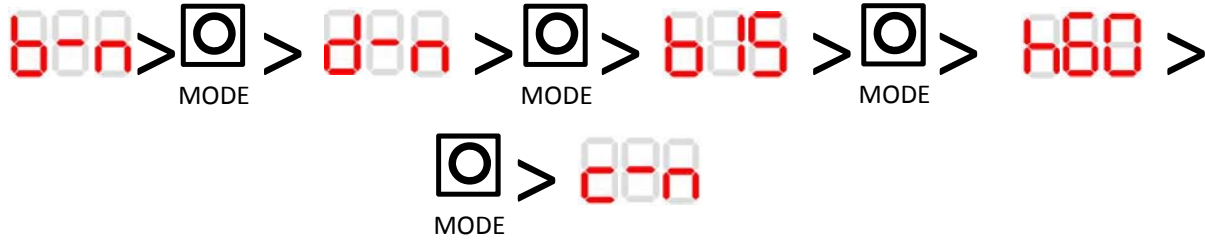

Mode button being pressed to scroll through menu



Mode and up buttons pressed to change the setting to Bathroom and ducted modes



Up button pressed to change boost time from 15 to 18 minutes

### Pull Cord Function

**Pull** ➔ **Boost 1** ➔ **Pull** ➔ **Boost 2** ➔ **Pull** ➔ **Boost Off**

### Commissioning Options

Display text	Description	Options		Default
b-n	Kitchen or Bathroom mode	b-y = Bathroom mode	b-n = Kitchen Mode	Kitchen
d-n	Ducted or Wall/Window kit	d-y = Ducted mode	d-n = Wall/Window mode	Wall/Window
b15	Boost time	b01 to b30 – 1 to 30 minutes		15 minutes
h60	Humidity level trigger	h50 to h70 - 50% to 70% relative humidity		60% RH
c-n	Clear data reset	c-n = reset no	c-y = Reset yes	No

### Settings

Mode	Trickle	Boost 1	Boost 2	Boost time	Humidity
Kitchen	9 l/s	30 l/s	60 l/s	15 minutes	60% RH
Bathroom	9 l/s	15 l/s	30 l/s	15 minutes	60% RH
Ducted	This adjusts the impeller speed to give the required airflow with a high duct pressure				
Wall/Window	This adjusts the impeller speed to give the required airflow at a low duct pressure				