# **DV96 Adroit**

**Smart Ventilation** 



# **KEY FEATURES**

- For use in dwellings up to 130 m<sup>2</sup> \*
- Up to 90% thermal efficiency and low SFP
- 'A' energy rating
- Internet control by smart phone, tablet or PC
- Triple filter design with F7 pollen filter
- Automatic, 100% summer by-pass
- Integral Humidity Sensor
- Galvanised steel, double-skin casing
- BMS (Modbus / KNX) connection
- Optional LCD digital controller with four independent environmental profiles
- Optional manual four speed controller
- Auto cut-out switch for extra safety
- Optional built-in Electric Post-heater
- Optional smart frost protection
- Complies with Building Regulations and Passive House certified
- 5 year warranty+

### **DV96 Adroit**


With its powerful air volume capacity and high thermal efficiency the DV96 Adroit is suitable for medium sized family homes. Control your indoor air environment at home or on the go via the Adroit 'Cloud' internet control by smart phone, tablet or PC.

With the triple filter design with an F7 pollen filter, the DV96 Adroit provides additional protection against invisible, harmful particles and creates an ultra hygienic environment.

The automatic, 100% summer by-pass facility isolates the heat recovery function and helps to effectively maintain a temperate indoor air climate during the summer months.

The unit includes an easily removable, plastic heat exchanger and may be equipped with a range of optional accessories for higher performance.









### **TECHNICAL DATA**

Specification	DV96
Suitable for dwellings up to m <sup>2</sup>	130
Max air flow (m³/hr) / (l/sec) at 100Pa.	320 / 89
Thermal efficiency (%)	Up to 90
Heat exchanger	Cross-Counter-Flow (Plastic)
Fans	EC
Summer by-pass damper	100% automatic
Integral humidity sensor (RH %)	0 - 100
Frost protection (optional)	Smart Frost
Controls (optional)	Digital - 4 Profiles, 100% adjustable Manual - 4 Speed controller, adjustable
Connection to BMS	Modbus / KNX optional
Mounting	Wall / Ceiling
Sound power level @3m (dB(A))	48
Duct diameter (mm)	125 (4 ports)
Condensate discharge (ins)	3/4 BSP
Electrical supply	230V / 1ph / 50Hz
Max. power consumption (W)	162
Filter Class	2 x G4, 1 x F7
Built-in electric post-heater (optional) (W)	900
Protection class	IP34
Casing insulation (mm)	20
Weight (kg)	53
Dimensions (L x D x H) (mm)	600 x 430 x 545
Duct entry	Top Entry
Versions available Right Hand: With optional electric post-heater: Left Hand: With optional electric post-heater:	90000576 90000576EPH 90000577 90000577EPH

# **DIMENSIONS**





#### Duct outlets, model R

Inner diameter of female outlet collar ø 125 mm

- Supply air to dwelling
   Extract air from dwelling to unit
- Exhaust air out
- Outdoor air to unit
   Condensate drain


#### Duct outlets, model L

Inner diameter of female outlet collar ø125mm

- 1. Exhaust air out
- Outdoor air to uni
- Supply air to dwelling
   Extract air from dwelling to unit
- 5. Condensate drain
- + excludes motors. Motor warranty one year from date of purchase

Model	Α	В	С	D	E	F	G	Н	1	J	K	L
DV96	600	545	55	430	407	298	102	93	363	600	141	459

### **PERFORMANCE**

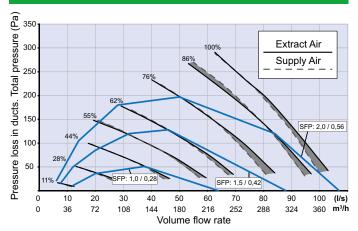

\* Guidance only. Dependant upon system pressure.

### **ACCESSORIES**

### **Adroit Digital Controller**

Wall mounted, LCD display with four 100% independently user adjustable air flow profiles (Home, Away, Boost, Fireplace). A range of indoor parameters ie: air flow rates, temperature, humidity, by-pass, time clock settings, CO<sub>2</sub> sensor, filter alert are adjustable to suit your indoor environment. Internet connectivity via Adroit 'Cloud' for control at home or on the go.

### **Adroit Speed Controller**

Wall mounted, four speed (independently adjustable) rotary switch air flow controller.

Visit airflow.com for Adroit controls options data sheet.

Accessory	Product Code				
Adroit Digital Controller	90000610				
Adroit Relative Humidity Transmitter	90000612				
Adroit CO <sub>2</sub> Transmitter	90000613				
Adroit Speed Controller	9041219				
Ceiling Mounting Plate	90000716				
Attic Roof Penetration Plate	90000718				
Additional 900W Heater for DV96 (R)	90000614				
Additional 900W Heater for DV96 (L)	90000615				
Filter Set (2 x G4, 1 x F7)	90000375				
Boost Switch	90000542				
KNX-Converter	90000723				

# **CERTIFICATION**

The DV96 Adroit meets requirements set out by the Energy Related Products (ErP) Directive 2016, achieving an A rating. You can find out more about the ErP Directive at: www.airflow.com



The DV96 was tested and has achieved Passive House Approval by the Passive House Institute when equipped with the optional Electric Post-heater.



