




**AURA (Recirculating)**

- White tempered glass
- Carbon.Zeo filter
- Perimeter extraction
- Touch control
- LED lighting 5500K
- Metallic grease filters
- Remote control included
- Recirculating installation only

**Product Dimensions**

Product Code:  
AUR1200-CRWH

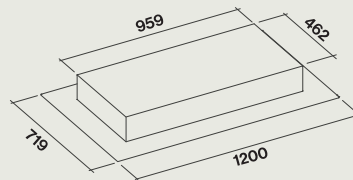

**Maximum distance from hob**

- Electric and gas: 1500mm

**Remote control**



**Performance - 600m<sup>3</sup>/h**

Motor speed	1	2	3	4
Noise level dB(A)re1pW - I.E.C.60704-2-13	53	57	61	68
Connected load (W)	230			




The Carbon.Zeo filter can be regenerated last up to 3 years.  
To regenerate, place the filters in the oven at 150°C for 1 hour.  
Falmecc recommend regenerating the filter after 18 months, depending on use.

# Motor Installation Examples

Extractor with recirculation filter

Applies to:


- Slimline Motor 800m<sup>3</sup>/h



Motor installed on top of extractor

Applies to:


- Slimline Motor 800m<sup>3</sup>/h



Motor installed along the duct run

Applies to:


- Inline Motor 1100m<sup>3</sup>/h
- Inline Motor 1300m<sup>3</sup>/h



Motor installed on top of extractor

Applies to:


- Inline Motor 1100m<sup>3</sup>/h



Extractor with rectangular junction

Applies to:


- Inline Motor 1100m<sup>3</sup>/h
- Inline Motor 1300m<sup>3</sup>/h
- External Motor 1000m<sup>3</sup>/h
- External Motor 1500m<sup>3</sup>/h



Motor installed on outside vertical wall

Applies to:


- External Motor 1000m<sup>3</sup>/h
- External Motor 1500m<sup>3</sup>/h

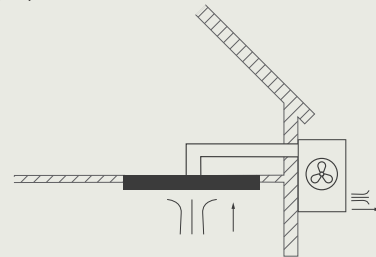

Motor installed on flat roof

Applies to:

- Flat Roof Mounted Motor 1033m<sup>3</sup>/h



# Motor Tables

Performance – Slim motor 800m<sup>3</sup>/h

Motor speed	1	2	3	4
Noise level dB(A)re1pW - I.E.C.60704-2-13	52	60	65	68
Air flow (m <sup>3</sup> /h) I.E.C.61591	330	470	580	680
Connected load (W)	400			
Rectangular duct outlet Ø (mm)	220x90			

Performance – Flat roof mounted motor 1033m<sup>3</sup>/h

Motor speed	1	2	3	4
Noise level dB(A)re1pW - I.E.C.60704-2-13	58	66	70	74
Air flow (m <sup>3</sup> /h) I.E.C.61591	520	630	680	750
Connected load (W)	570			
Duct outlet Ø (mm)	150			

Performance – Inline motor 1100m<sup>3</sup>/h

Motor speed	1	2	3	4
Noise level dB(A)re1pW - I.E.C.60704-2-13	53	62	66	69
Air flow (m <sup>3</sup> /h) I.E.C.61591	360	500	650	850
Connected load (W)	570			
Duct outlet Ø (mm)	150			

Performance – Inline motor 1300m<sup>3</sup>/h

Motor speed	1	2	3	4
Noise level dB(A)re1pW - I.E.C.60704-2-13	50	58	63	68
Air flow (m <sup>3</sup> /h) I.E.C.61591	450	650	800	1230
Connected load (W)	720			
Duct outlet Ø (mm)	200			

Performance – External motor 1000m<sup>3</sup>/h

Motor speed	1	2	3	4
Noise level dB(A)re1pW - I.E.C.60704-2-13	67	70	73	75
Air flow (m <sup>3</sup> /h) I.E.C.61591	750	850	920	950
Connected load (W)	570			
Duct outlet Ø (mm)	150			

Performance – External motor 1500m<sup>3</sup>/h

Motor speed	1	2	3	4
Noise level dB(A)re1pW - I.E.C.60704-2-13	52	64	72	74
Air flow (m <sup>3</sup> /h) I.E.C.61591	1000	1200	1250	1430
Connected load (W)	570			
Rectangular duct outlet Ø (mm)	200			