

VIRGOLA NO-DROP

Version

800 m³/h - 90 cm

Collection

Design+

EAN code

8034122359595

FEATURES

Tempered turning glass
Electronic control
Metallic grease filter, removable and washable
Dynamic LED Light (2700K - 5500K)
Scotch brite stainless steel
No-Drop patented anti-condensation system

TECHNICAL FEATURES

Installation type
Built-in
Dimensions
90 cm
Finishing
Scotch brite stainless steel
Motor
800 m³/h
Type of control
Mechanical control
Speed settings
4

PACKAGING: WEIGHTS AND VOLUMES

Gross weight
19 kg
Net weight
15 kg
Volume
0,18 m³
Packaging size
Length
995 mm
Height
465 mm
Depth
395 mm

MOTOR TECHNICAL SHEET

Maximum capacity
670 m³/h
I.E.C. 61591
Maximum noise
67 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
500 Pa
Maximum power motor
215 W
ENERGY CLASS
B

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W
Voltage
220-240V
Frequency
50-60Hz

VIRGOLA NO-DROP

Version

800 m³/h - 90 cm

Collection

Design+


EAN code

8034122359595

MOTOR TECHNICAL SHEET

Speed motor	1	2	3	4
Noise dB(A)re1pW-I.E.C.60704-2-13	49	55	61	67
Capacity (m3/h) I.E.C.61591 Tubazioni normalizzate	270	360	470	670
Maximum pressure (Pa)	390	420	460	500
Power motor (W)	134	156	180	215
Air outlet	150	150	150	150

CAPACITY / PRESSURE

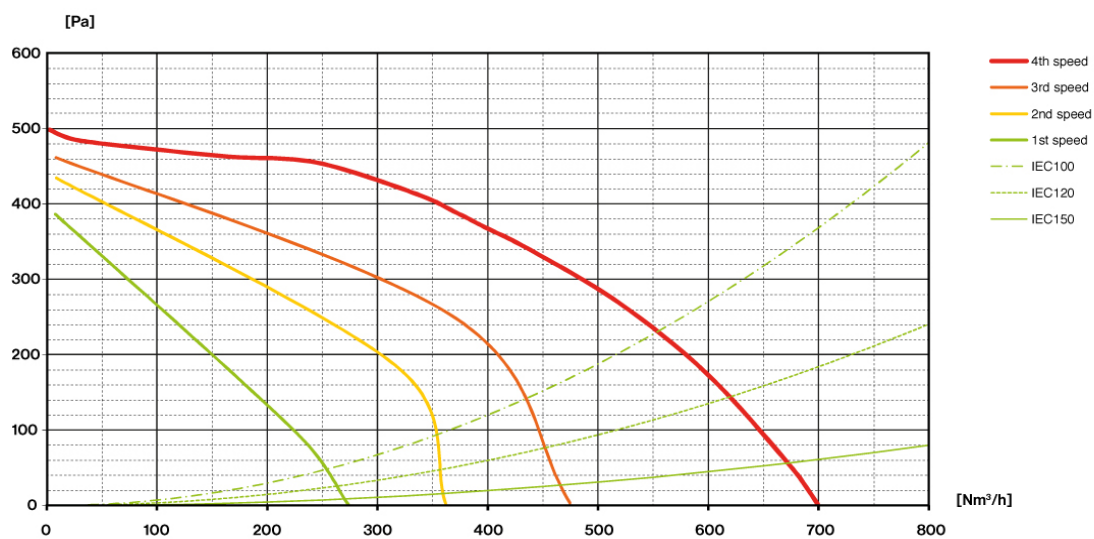

VIRGOLA NO-DROP

Version

800 m³/h - 90 cm


Collection

Design+

EAN code

8034122359595

ENERGY LABEL

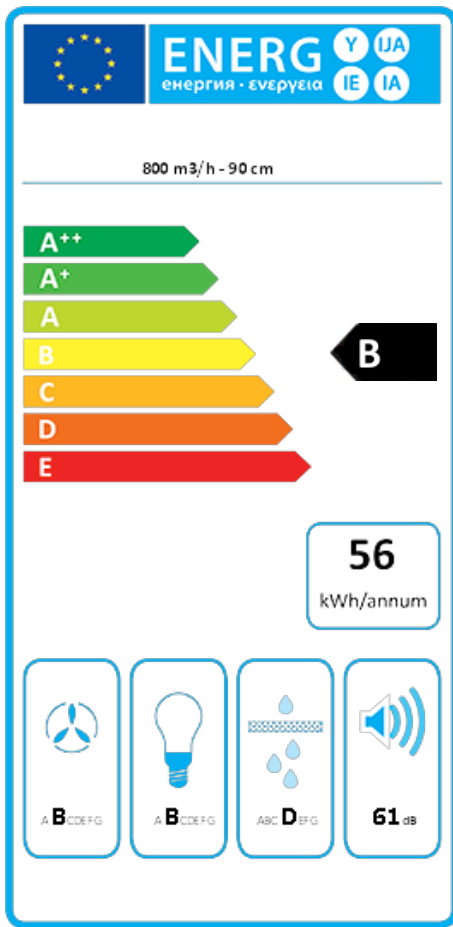

PF		
S	Falmec Spa	
M	800 m ³ /h - 90 cm	
AEC	55,7	kWh/a
ECC	B	
FDE	26,4	
FDEC	B	
LE	27,9	
LEC	B	
GFE	74,0	
GFEC	D	
Qmin	250,0	m ³ /h
Qmax	480,0	m ³ /h
Qboost	620,0	m ³ /h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1,0	
EEl	57,8	
Qbep	364,0	m ³ /h
Pbep	371	Pa
Qboost	620,0	m ³ /h
Wbep	142,0	W
WL	5,30	W
Emiddle	148	lux
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.