



UNIT: mm[inch]

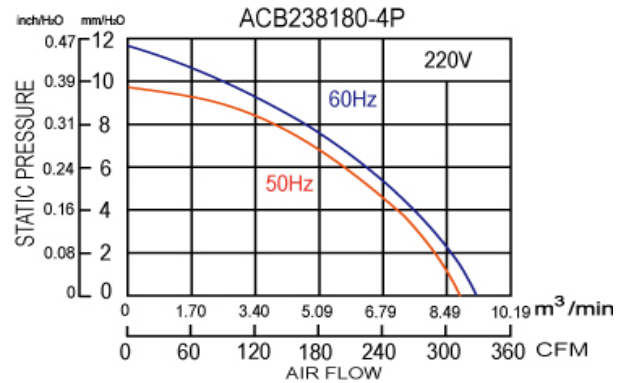

INFORMATION

MOTOR:	Outer rotor motor \varnothing 92mm
HOUSING:	Steel Painted Black Scroll
IMPELLER:	Steel
BEARING:	Ball
INSULATION :	Class F
OPERATING TEMPERATURE:	0°C to + 65°C
SAFTY:	Thermally Protected
DIELECTRIC STRENGTH:	5mA Max. at 1500 VAC for 1 second
WEIGHT:	4.2 KGS
RoHS COMPLIANCE	Yes.
IP LEVEL	IP44 (Special IP Rating On Request)

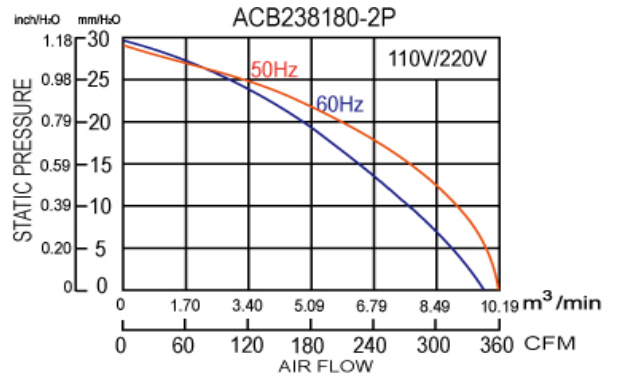

SPECIFICATION

MODEL NO.	RATED VAC	FREQ. (Hz)	SPEED (RPM)	RATED CURRENT (A)	INPUT POWER (W)	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						/min	m³	mm-H2O	inch-H2O	
ACB238180V1H2P	110	60	1290	1.52	165	9.67	341	29.58	1.16	67/69
ACB238180V2H2P	220	50/60	1440/1290	0.69/0.76	150/165	10.17/6.97	359/341	28.56/29.58	1.12/1.16	56/59
ACB238180V2H4P	220	50/60	1170/1200	0.30/0.37	65/80	8.29/9.17	315/324	6.69/11.73	0.38/0.46	73/75