



INFORMATION

SIZE	120x120x38mm
MOTOR:	Capacitor Motor. Thermally protected
HOUSING:	Die-cast aluminum, Painted black (AP)
IMPELLER:	Metal
BEARING:	Ball Type or Sleeve Type
TERMINATION:	T-Terminal type or W-Lead wire type
OPERATING TEMPERATURE:	-10°C~+70°C
Safety	Impedance Protected
INSULATION RESISTANCE:	100 MΩ min.@500VDC
DIELECTRIC STRENGTH:	5mA Max. at 1500 VAC for 1 second
TYPE of PROTECTION	IP21 (special IP rating on request)
RoHS	Yes
WEIGHT:	600g

sA12038M

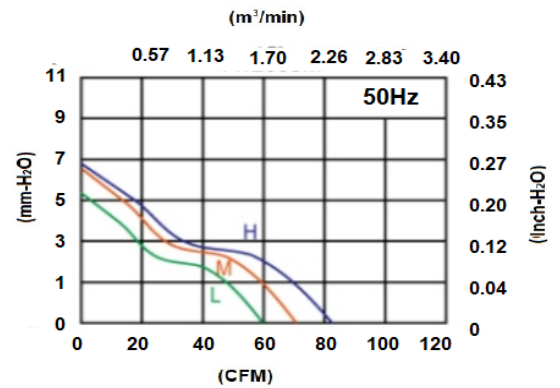

sA12038M

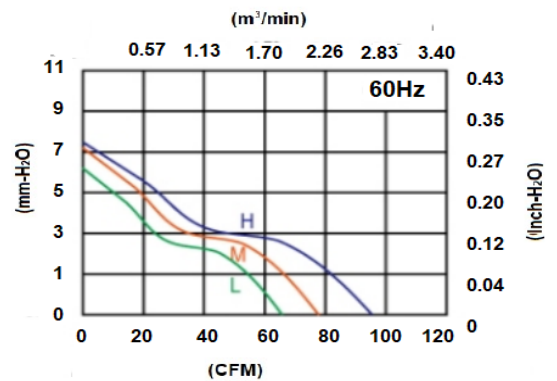

SPECIFICATION

MODEL NO.	RATED VAC	FREQ. (Hz)	SPEED (RPM)	RATED CURRENT (A)	INPUT POWER (W)	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						m ³ /min	CFM	mm-H ₂ O	inch-H ₂ O	
sA12038V1HM	115	50/60	2650/3000	0.25/0.24	24/22	2.33/2.71	82.4/95.6	6.70/7.40	0.26/0.29	41/45
sA12038V1MM	230	50/60	2250/2500	0.24/0.23	23/21	1.98/2.21	70.0/78.0	6.54/7.26	0.26/0.29	38/42
sA12038V1LM	115	50/60	1800/2100	0.23/0.22	22/20	1.20/1.84	60.0/65.0	5.23/6.10	0.17/0.20	36/38
sA12038V2HM	230	50/60	2650/3000	0.14/0.13	22/21	2.33/2.71	82.4/95.6	6.70/7.40	0.26/0.29	41/45
sA12038V2MM	115	50/60	2250/2500	0.13/0.12	21/20	1.98/2.21	70.0/78.0	6.54/7.26	0.26/0.29	38/42
sA12038V2LM	230	50/60	1800/2100	0.13/0.12	20/19	1.20/1.84	60.0/65.0	5.23/6.10	0.17/0.20	36/38