



## INFORMATION

SIZE	80x80x38mm
MOTOR:	Capacitor Motor. Thermally protected
HOUSING:	Die-cast aluminum, Painted black (AP)
IMPELLER:	Metal
BEARING:	Ball Type or Sleeve Type
TERMINATION:	T-Terminal type or W-Lead wire type
OPERATING TEMPERATURE:	-10°C~+70°C
Safety	Impedance Protected
INSULATION RESISTANCE:	100 MΩ min.@500VDC
DIELECTRIC STRENGTH:	5mA Max. at 1500 VAC for 1 second
TYPE of PROTECTION	IP21 (special IP rating on request)
RoHS	Yes
WEIGHT:	421g

## sA15055M

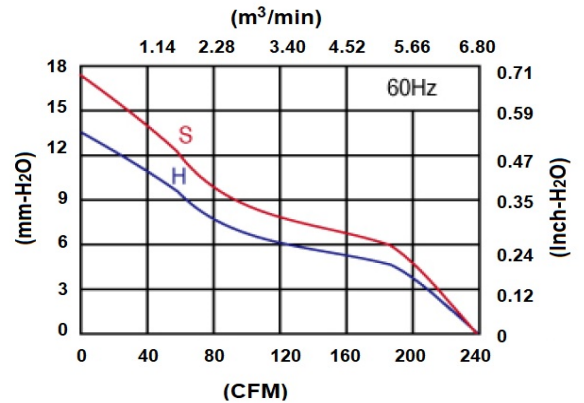

## sA15055M

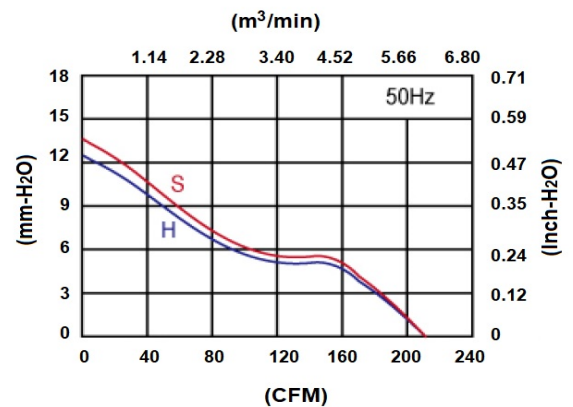

## SPECIFICATION

MODEL NO.	RATED VAC	FREQ. (Hz)	SPEED (RPM)	RATED CURRENT (A)	INPUT POWER (W)	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						m <sup>3</sup> /min	CFM	mm-H <sub>2</sub> O	inch-H <sub>2</sub> O	
sA15055V1SHM	115	50/60	2800/3300	0.27/0.23	26/26	5.94/6.79	210/240	13.5/17.5	0.53/0.69	55/61
sA15055V1HM	115	50/60	2700/3100	0.25/0.21	27/25	5.94/6.79	210/240	12.5/13.5	0.49/0.53	53/59
sA15055V2SHM	230	50/60	2800/3300	0.10/0.11	23/26	5.94/6.79	210/240	13.5/17.5	0.53/0.69	55/61
sA15055V2HM	230	50/60	2700/3100	0.11/0.12	26/27	5.94/6.79	210/240	12.5/13.5	0.49/0.53	53/59