


## INFORMATION

SIZE	Ø172x51 mm
MOTOR:	Capacitor Motor. Thermally protected
HOUSING:	Die-cast aluminum, Painted black (AP)
IMPELLER:	Plastic or Metal
BEARING:	Ball Type
TERMINATION:	T-Terminal type or W-Lead wire type
OPERATING TEMPERATURE:	-20°C~+70°C
Safety	Thermally Protected(Auto Restart)
DIELECTRIC STRENGTH:	1800 VAC for 1 Sec.
TYPE of PROTECTION	Class B. , F, IP55
RoHS	Yes
WEIGHT:	920g (Plastic Blades) ; 1050g (Metal Blades)

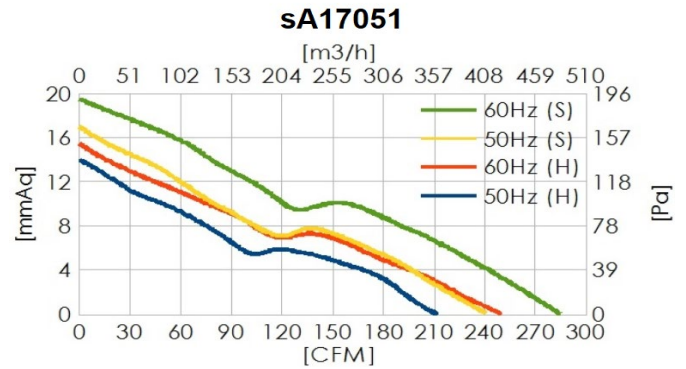

## SPECIFICATION

MODEL NO.	RATED VAC	FREQ. (Hz)	SPEED (RPM)	RATED CURRENT (A)	INPUT POWER (W)	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						m <sup>3</sup> /min	CFM	mm-H <sub>2</sub> O	inch-H <sub>2</sub> O	
sA17051V1H	115	50/60	2800/3300	0.28/0.24	27/27	6.8/8.06	240/285	17.0/20.0	0.66/0.78	55/61
sA17051V1M	115	50/60	2650/3050	0.25/0.23	27/27	5.9/7.0	210/250	14.0/15.5	0.55/0.61	53/59
sA17051V2H	230	50/60	2800/3300	0.11/0.12	24/27	6.8/8.06	240/285	17.0/20.0	0.66/0.78	55/61
sA17051V2M	230	50/60	2650/3050	0.11/0.11	26/26	5.9/7.0	210/250	14.0/15.5	0.55/0.61	53/59