


## INFORMATION

SIZE	172x151x38 mm
MOTOR:	Capacitor Motor. Thermally protected
HOUSING:	Die-cast aluminum, Painted black (AP)
IMPELLER:	Plastic or Metal
BEARING:	Ball Type
TERMINATION:	T-Terminal type or W-Lead wire type
OPERATING TEMPERATURE:	-20°C~+70°C
Safety	Thermally Protected(Auto Restart)
INSULATION RESISTANCE:	100 MΩ min.@500VDC
DIELECTRIC STRENGTH:	1800 VAC for 1 Sec.
TYPE of PROTECTION	Class B. , F, IP54
RoHS	Yes
WEIGHT:	800g (Plastic Blades) ; 820g (Metal Blades)

**sA17238**

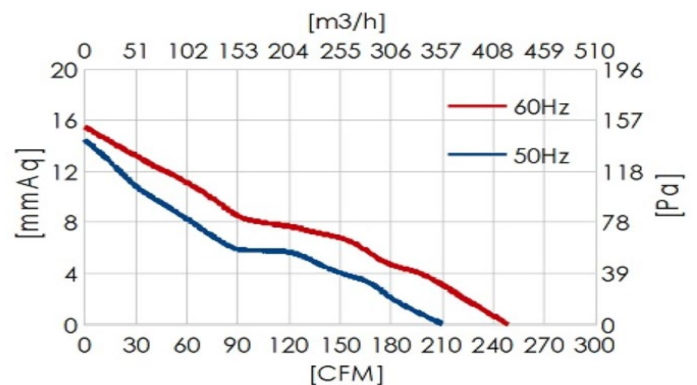

## SPECIFICATION

MODEL NO.	RATED VAC	FREQ. (Hz)	SPEED (RPM)	RATED CURRENT (A)	INPUT POWER (W)	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						m <sup>3</sup> /min	CFM	mm-H <sub>2</sub> O	inch-H <sub>2</sub> O	
sA17238V1H	115	50/60	2700/3100	0.25/0.21	27/25	5.91/7.07	210/250	14.0/15.5	0.55/0.61	53/50
sA17238V2H	230	50/60	2800/3300	0.11/0.11	25/24	5.91/7.07	210/250	14.0/15.5	0.55/0.61	53/50