


INFORMATION

MOTOR:	Capacitor motor, impedance protected
HOUSING:	Die-cast aluminum, Painted black (AP) or plated (AN)
IMPELLER:	Glass reinforced thermoplastic, UL 94V-0
BEARING:	Two-ball
TERMINATION:	T-Terminal type or W-Lead wire type
OPERATING TEMPERATURE:	Ball type -20°C~+80°C
OPERATING VOLTAGE RANGE :	103 VAC to 126 VAC for 115V Type 207 VAS to 253 VAC for 230V Type
DIELECTRIC STRENGTH:	1 min. at 1,500VAC, 50/60Hz
INSULATION RESISTANCE:	10M Ω min. @500 VDC
LIFE EXPECTANCY:	Ball bearing 60,000 hours at 60°C;
WEIGHT:	900 gm

sA17251

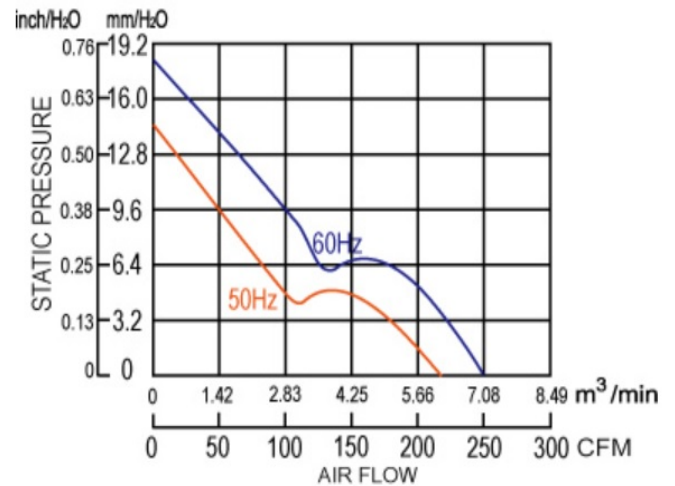

SPECIFICATION

MODEL NO.	RATED VAC	FREQ. (Hz)	SPEED (RPM)	RATED CURRENT (A)	INPUT POWER (W)	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						m³/min	CFM	mm-H2O	inch-H2O	
sA17251V1M	115	50/60	2750/3200	0.23/0.22	26/25	6.08/7.07	215/250	14.5/18.5	0.57/0.72	52/57
sA17251V2M	230	50/60	2750/3200	0.12/0.11	26/25	6.08/7.07	215/250	14.5/18.5	0.57/0.72	52/57