


INFORMATION

SIZE	225x80 mm
MOTOR:	Capacitor Motor.Thermally protected
HOUSING:	Die-cast aluminum, Painted black (AP)
IMPELLER:	Metal
BEARING:	Ball Type
TERMINATION:	T-Terminal type or W-Lead wire type
OPERATING TEMPERATURE:	-30°C~+85°C
Safety	Thermally Protected(Auto Restart)
INSULATION RESISTANCE:	100 MΩ min.@500VDC
DIELECTRIC STRENGTH:	1800 VAC for 1 Sec.
TYPE of PROTECTION	Class B. , F, IP54
RoHS	Yes
WEIGHT:	2750g (Metal Blades)

sA22580M

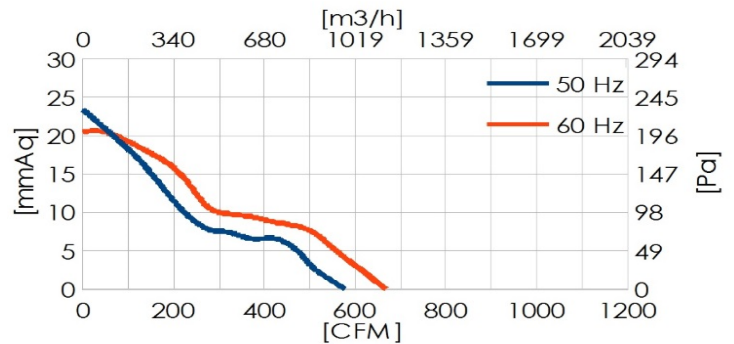

SPECIFICATION

MODEL NO.	RATED VAC	FREQ. (Hz)	SPEED (RPM)	RATED CURRENT (A)	INPUT POWER (W)	Max. Air Flow		Max. Static Pressure		Noise Level (dB)
						m ³ /min	CFM	mm-H ₂ O	inch-H ₂ O	
sA22580V1HM	115	50/60	2800/3200	0.61/0.62	53/68	16.41/18.96	580.670	23.5/20.5	0.93/0.81	68/71
sA22580V2HM	230	50/60	2800/3200	0.26/0.31	53/68	16.41/18.96	580.670	23.5/20.5	0.93/0.81	68/71